CFP2000 Result

Copyright ©1999-2005, Standard Performance Evaluation Corporation

Hewlett-Packard Company

ProLiant BL25p G2 (AMD Opteron (TM) 2220SE)

SPECfp2000 = 2023

SPECfp_base2000 = 1831

SPEC license #: 3 | Tested by: Hewlett-Packard Company | Test date: Nov-2006 | Hardware Avail: Jan-2007 | Software Avail: Sep-2006

Benchmark	Reference Time	Base Runtime	Base Ratio	Runtime	Ratio
168.wupwise	1600	55.7	2871	55.7	2871
171.swim	3100	124	2501	120	2581
172.mgrid	1800	105	1707	105	1707
173.applu	2100	139	1508	122	1717
177.mesa	1400	130	1081	64.2	2181
178.galgel	2900	95.4	3040	87.8	3304
179.art	2600	57.7	4507	57.7	4503
183.equake	1300	76.4	1702	76.4	1702
187.facerec	1900	92.9	2045	96.1	1978
188.ammp	2200	181	1215	149	1479
189.lucas	2000	107	1861	90.7	2205
191.fma3d	2100	128	1647	113	1854
200.sixtrack	1100	130	845	130	845
301.apsi	2600	164	1584	164	1584

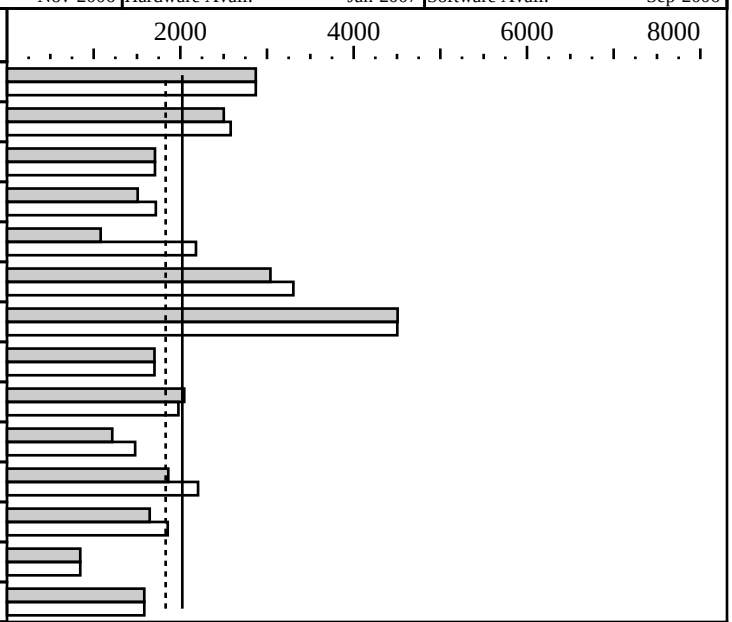

Hardware

CPU:	AMD Opteron (TM) 2220SE
CPU MHz:	2800
FPU:	Integrated
CPU(s) enabled:	2 cores, 1 chip, 2 cores/chip
CPU(s) orderable:	1,2 chips
Parallel:	No
Primary Cache:	64 KB I + 64 KB D on chip per core
Secondary Cache:	1 MB I+D on chip per core
L3 Cache:	N/A
Other Cache:	N/A
Memory:	8 GB (4x2 GB PC2-5300P CL5.0)
Disk Subsystem:	1x36 GB 10 K SAS
Other Hardware:	

Software

Operating System:	Windows Server 2003 Enterprise SP1
Compiler:	Intel C++ Compiler for 32-bit applications, (version 9.1 Build 20060816Z) Intel Fortran Compiler for 32-bit applications, (version 9.1 build 20060816Z) PGI Fortran compiler 6.0-8 for Windows XP (32-bit) PGI C compiler 6.0-8 for Windows XP (32-bit) Microsoft Visual Studio .NET 7.0.9466 (for libraries) AMD Core Math Library V3.5.0
File System:	NTFS
System State:	Default

Notes/Tuning Information

```
 +FDO: PASS1=-Qprof_gen  PASS2=-Qprof_use (Intel compiler)
 +FDO*: PASS1=-Mpfi  PASS2=-Mpfo (PGI compiler)
 +ACML is linking with AMD Core Math Library V3.5.0
 ifort is the Intel Fortran compiler, icl is the Intel C++ compiler and
 pgf90 is the PGI Fortran compiler, pgcc is the PGI C compiler.
Base tuning for C programs:       pgcc  -fastsse -Mipa=fast,inline
Base tuning for FORTRAN programs: pgf90 -fastsse -Mipa=fast,inline +FDO* ONESTEP=1
Portability flags:
  178.galgel: -Mfixed
Peak tuning:
 168.wupwise:       pgf90 basepeak=yes
 171.swim:          ifort -Qipo  -O3  -QaxN -QxW +FDO -Qunroll0 ONESTEP=1
 172.mgrid:         pgf90 basepeak=yes
 173.applu:         ifort -Qipo  -O3  -QaxN -QxW +FDO -auto ONESTEP=1
 177.mesa:          icl   -Qipo -arch:SSE2       +FDO -Qunroll1 -Qansi_alias ONESTEP=1
                        -Qoption,c,-ip_ninl_max_stats=1500,-ip_ninl_max_total_stats=4500
 178.galgel:       pgf90 -fastsse -Mipa=fast,safe RM_SOURCES=lapak.f90 -Munix +ACML ONESTEP=1
```

Copyright ©1999-2005, Standard Performance Evaluation Corporation

Notes/Tuning Information (Continued)

```
 179.art:           pgcc  -fastsse -Mipa=fast,inline
 183.equake:        icl   basepeak=yes
 187.facerec:       ifort -Qipo            -QxW +FDO -Qunroll3 ONESTEP=1
                        -Qoption,f,-ip_ninl_max_stats=2500,-ip_ninl_max_total_stats=7000
 188.ammp:          icl   -Oa   -arch:SSE2  -Zp4      -Qansi_alias ONESTEP=1
 189.lucas:         ifort -Qipo            -QxW      -Qunroll1 ONESTEP=1
 191.fma3d:         ifort -Qipo       -QaxN -QxW +FDO -Qansi-alias- ONESTEP=1
 200.sixtrack:      pgf90 basepeak=yes
 301.apsi:          pgf90 basepeak=yes
BIOS Configuration Notes
  Node Interleaving is Disabled
Other Configuration Notes
  The start /b /wait /affinity command is used to bind CPU(s) to processes.
```