CFP2000 Result

Copyright ©1999-2005, Standard Performance Evaluation Corporation

Fujitsu Siemens Computers

PRIMERGY BX620 S3, Intel Xeon processor E5310, 1.60 GHz

SPECfp_rate2000 = 75.1

SPECfp_rate_base2000 = 75.1

SPEC license #: 22 | Tested by: Fujitsu Siemens Computers | Test date: Nov-2006 | Hardware Avail: Nov-2006 | Software Avail: Aug-2006

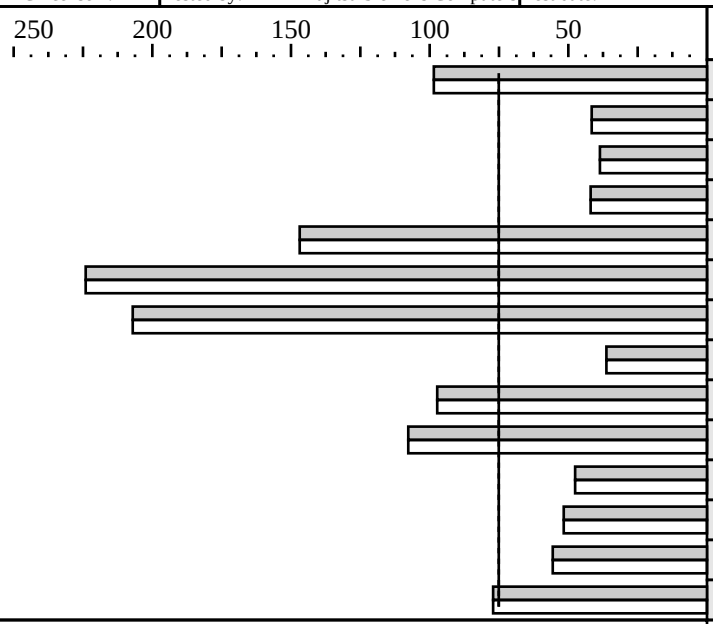

Benchmark	Base Copies	Base Runtime	Base Ratio	Copies	Runtime	Ratio
168.wupwise	8	151	98.5	8	151	98.5
171.swim	8	692	41.6	8	692	41.6
172.mgrid	8	433	38.6	8	433	38.6
173.applu	8	464	42.0	8	464	42.0
177.mesa	8	88.5	147	8	88.5	147
178.galgel	8	120	224	8	120	224
179.art	8	117	207	8	117	207
183.equake	8	333	36.3	8	333	36.3
187.facerec	8	181	97.3	8	181	97.3
188.ammp	8	190	108	8	190	108
189.lucas	8	390	47.5	8	390	47.5
191.fma3d	8	377	51.7	8	377	51.7
200.sixtrack	8	184	55.6	8	184	55.6
301.apsi	8	313	77.1	8	313	77.1

Hardware

CPU:	Intel Xeon processor E5310 (1.60 GHz, 2x4MB L2, 1066 MHz system bus)
CPU MHz:	1600
FPU:	Integrated
CPU(s) enabled:	8 cores, 2 chips, 4 cores/chip
CPU(s) orderable:	1,2 chips
Parallel:	No
Primary Cache:	32KB(I) + 32KB(D) on chip, per core
Secondary Cache:	8MB(I+D) on chip, per chip (4MB shared per 2 cores)
L3 Cache:	N/A
Other Cache:	N/A
Memory:	8x1GB DDR2-RAM PC2-5300F (CAS 5-5-5)
Disk Subsystem:	Seagate ST936701SS (SAS, 10 krpm, 36GB)
Other Hardware:	none

Software

Operating System:	64-Bit SUSE LINUX Enterprise Server 10 Kernel 2.6.16.21-0.8-smp on an x86_64
Compiler:	Intel C++ and Fortran Compiler 9.1 for EM64T Build 20060816 (for 64-bit applications)
File System:	reiserfs
System State:	Multi-user run level 3

Notes/Tuning Information

```
GENERAL
+FDO implies feedback-directed optimization
PASS1: -prof_gen  PASS2: -prof_use

Optimization flags
ONESTEP=yes set for all benchmarks

Portability flags
-DSPEC_CPU2000_LP64 applied to all benchmarks
178.galgel: -FI for fixed-format Fortran

Base tuning flags
   for Fortran and C programs: -fast +FDO

Peak tuning flags
   same as baseline (basepeak=true set globally)
```

Copyright ©1999-2005, Standard Performance Evaluation Corporation

Notes/Tuning Information (Continued)

The system bus runs at 1066 MHz

This result was measured with 64-bit binaries using the 64-bit version of the operating system.

BIOS Configuration:
Hardware Prefetch = Disable, Adjacent Sector Prefetch = Disable

For information about Fujitsu Siemens Computers in your country please see:
http://www.fujitsu-siemens.com/countries