CFP2000 Result

Copyright ©1999-2005, Standard Performance Evaluation Corporation

Itautec

Servidor Itautec MX221 (Intel Xeon 5120 processor, 1.86GHz)

SPECfp_rate2000 = 55.6

SPECfp_rate_base2000 = 55.6

SPEC license #: 9001 | Tested by: Itautec | Test date: Nov-2006 | Hardware Avail: Jul-2006 | Software Avail: Mar-2006

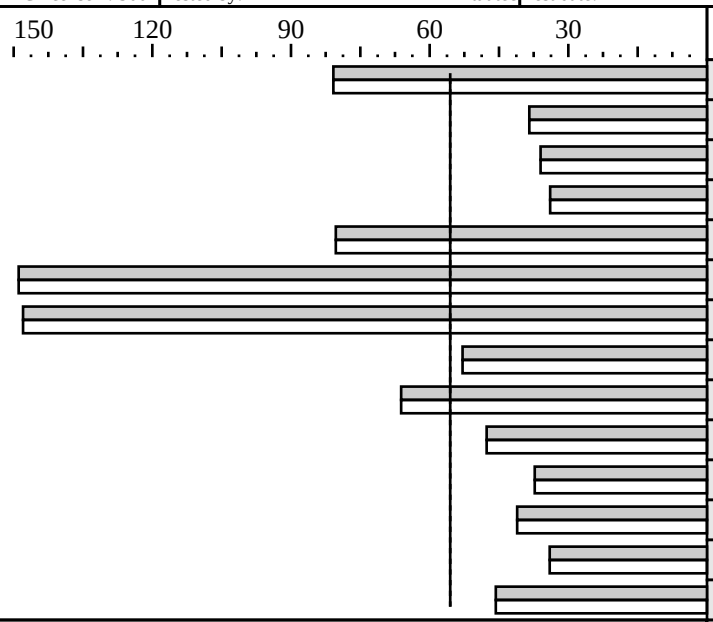

Benchmark	Base Copies	Base Runtime	Base Ratio	Copies	Runtime	Ratio
168.wupwise	4	91.8	80.8	4	91.8	80.8
171.swim	4	374	38.4	4	374	38.4
172.mgrid	4	232	36.0	4	232	36.0
173.applu	4	287	33.9	4	287	33.9
177.mesa	4	80.9	80.3	4	80.9	80.3
178.galgel	4	90.4	149	4	90.4	149
179.art	4	81.5	148	4	81.5	148
183.equake	4	114	52.9	4	114	52.9
187.facerec	4	133	66.2	4	133	66.2
188.ammp	4	214	47.7	4	214	47.7
189.lucas	4	249	37.3	4	249	37.3
191.fma3d	4	237	41.1	4	237	41.1
200.sixtrack	4	150	34.0	4	150	34.0
301.apsi	4	264	45.7	4	264	45.7

Hardware

CPU:	Intel Xeon 5120 processor (1.86 GHz, 4MB L2 shared, 1066 MHz system bus)
CPU MHz:	1860
FPU:	Integrated
CPU(s) enabled:	4 cores, 2 chips, 2 cores/chip
CPU(s) orderable:	1,2
Parallel:	No
Primary Cache:	32 KB I + 32 KB D on chip per core
Secondary Cache:	4MB (I+D) on chip, per chip, shared
L3 Cache:	N/A
Other Cache:	N/A
Memory:	14GB (7x2GB DDR2-RAM PC2-5300 FB-DIMM CL5 ECC)
Disk Subsystem:	1 x 120GB Serial ATA 7200 RPM
Other Hardware:	None

Software

Operating System:	Windows Server 2003 Enterprise Edition + SP1 (32-bit)
Compiler:	Intel C++ Compiler 9.1 Build 20060323Z (for 32-bit applications), Intel Fortran Compiler 9.1 Build 20060323Z (for 32-bit applications), Microsoft Visual Studio 2005(for libraries), Microquill SmartHeap Library for SMP v.8.0
File System:	NTFS
System State:	Default

Notes/Tuning Information

```
PORTABILITY FLAGS
   178.galgel:  -FI /F32000000
GENERAL
   +FDO: PASS1=-Qprof_gen  PASS2=-Qprof_use

Base tuning flags
   for Fortran programs: -fast -Qansi_alias +FDO
   for C programs:       -fast               +FDO shlsmpmt.lib

EXTRA LIBRARIES
  MicroQuill SmartHeap Library for SMP v.8.0
  http://www.microquill.com/

  BIOS settings default.
  The system bus runs at 1066 MHz
  This result was measured with 32-bit binaries using the 32-bit version of the operating system.
```