CINT2000 Result

Copyright ©1999-2007, Standard Performance Evaluation Corporation

Intel(R) Corporation

Intel(R) DG965WH motherboard(3.0 GHz, Intel(R) Pentium(TM) D processor 930)

SPECint2000 = 1519

SPECint_base2000 = 1519

SPEC license #: 13 | Tested by: Intel Corporation | Test date: Oct-2006 | Hardware Avail: Jul-2006 | Software Avail: May-2006

Benchmark	Reference Time	Base Runtime	Base Ratio	Runtime	Ratio
164.gzip	1400	135	1037	135	1036
175.vpr	1400	134	1045	133	1055
176.gcc	1100	62.8	1752	62.8	1752
181.mcf	1800	91.9	1959	91.9	1959
186.crafty	1000	88.7	1128	89.2	1121
197.parser	1800	151	1189	151	1193
252.eon	1300	64.0	2031	64.2	2024
253.perlbmk	1800	98.9	1819	99.2	1815
254.gap	1100	64.0	1718	64.0	1718
255.vortex	1900	69.6	2729	69.6	2729
256.bzip2	1500	131	1148	131	1147
300.twolf	3000	197	1524	197	1525

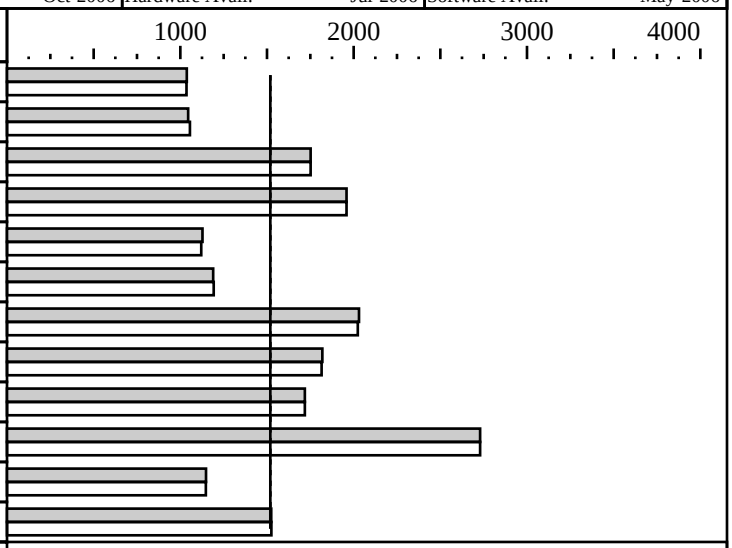

Hardware

CPU:	Intel(R) Pentium(TM) D processor 930(3.0 GHz, 800 MHz bus)
CPU MHz:	3000
FPU:	Integrated
CPU(s) enabled:	2 cores, 1 chip, 2 cores/chip
CPU(s) orderable:	1
Parallel:	No
Primary Cache:	12K micro-opsI + 16KBD per core, on chip
Secondary Cache:	2 MB(I+D) per core, on chip
L3 Cache:	None
Other Cache:	None
Memory:	2 GB (2 1GB Micron MT16HTF12864AY-80ED4 DDR2 800, CL5)
Disk Subsystem:	Maxtor DiamondMax 10 6B300S0 300GB NCQ Serial ATA (7200 RPM, 16MB cache)
Other Hardware:	SoundBlaster Live! PCI card

Software

Operating System:	Windows XP Professional SP2
Compiler:	Intel C++ Compiler 9.1 for 32-bit applications Build 20060323Z Package ID: W_CC_P_9.1.020 Microsoft Visual Studio 2005(for libraries) SmartHeap Library Version 8.0 from http://www.microquill.com/
File System:	NTFS
System State:	Default

Notes/Tuning Information

```
+FDO: PASS1=-Qprof_gen  PASS2=-Qprof_use
Base tuning for C programs:   -fast +FDO shlW32M.lib
Base tuning for C++ programs: -fast -Qcxx_features +FDO shlW32M.lib
Portability flags:
176.gcc: -Dalloca=_alloca /F10000000
186.crafty: -DNT_i386
252.eon:     -DHAS_ERRLIST
253.perlbmk: -DSPEC_CPU2000_NTOS -DPERLDLL /MT
254.gap: -DSYS_HAS_CALLOC_PROTO -DSYS_HAS_MALLOC_PROTO
Peak tuning:
164.gzip:     -fast -Qansi_alias -Oa  +FDO
175.vpr:      -fast -Qansi_alias +FDO
176.gcc:      basepeak=yes
181.mcf:      basepeak=yes
186.crafty:   -fast -Qansi_alias -Oa +FDO
197.parser:   -fast -Qansi_alias  +FDO
252.eon:      -fast +FDO
253.perlbmk:  -fast -Qansi_alias +FDO shlW32M.lib
254.gap:      basepeak=yes
255.vortex    basepeak=yes
```

Copyright ©1999-2007, Standard Performance Evaluation Corporation

Notes/Tuning Information (Continued)

```
256.bzip2:   -fast -Oa -Qunroll1 +FDO
300.twolf:    -fast -O3 +FDO shlW32M.lib
Tested systems can be used with Shin-G ATX case, Antec NeoPower 480W power supply
Product description located as of 1/2007:
http://www.intel.com/products/motherboard/DG965WH/index.htm
The system bus runs at 1066 MHz
```