CFP2000 Result

Copyright ©1999-2007, Standard Performance Evaluation Corporation

Intel(R) Corporation

Intel(R) DG965WH motherboard(2.67 GHz, Intel(R) Core(TM) 2 Duo processor E6700)

SPECfp_rate2000 = 49.5

SPECfp_rate_base2000 = 49.5

SPEC license #: 13 | Tested by: Intel Corporation | Test date: Oct-2006 | Hardware Avail: Jul-2006 | Software Avail: May-2006

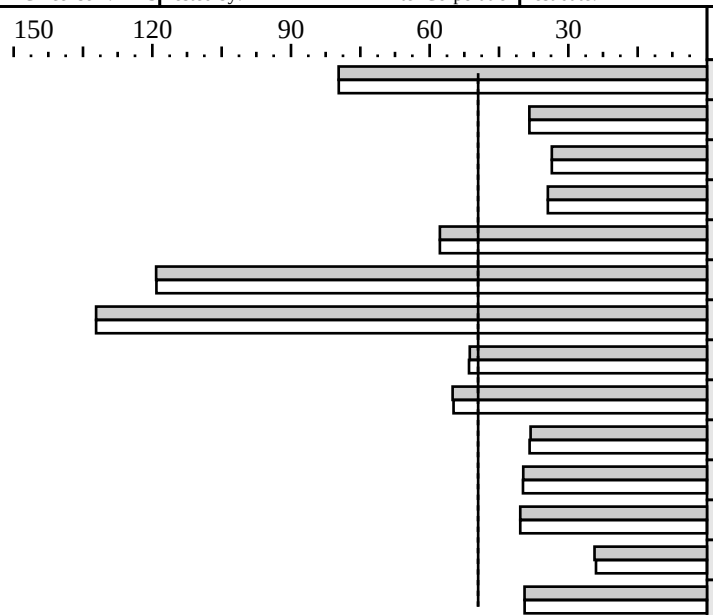

Benchmark	Base Copies	Base Runtime	Base Ratio	Copies	Runtime	Ratio
168.wupwise	2	46.6	79.7	2	46.6	79.7
171.swim	2	187	38.4	2	187	38.4
172.mgrid	2	124	33.6	2	124	33.6
173.applu	2	142	34.4	2	142	34.4
177.mesa	2	56.2	57.8	2	56.2	57.8
178.galgel	2	56.5	119	2	56.5	119
179.art	2	45.6	132	2	45.6	132
183.equake	2	58.8	51.3	2	58.6	51.5
187.facerec	2	80.1	55.0	2	80.4	54.8
188.ammp	2	134	38.2	2	133	38.4
189.lucas	2	117	39.8	2	117	39.8
191.fma3d	2	121	40.4	2	121	40.4
200.sixtrack	2	105	24.3	2	106	24.0
301.apsi	2	153	39.5	2	153	39.5

Hardware

CPU:	Intel(R) Core(TM) 2 Duo processor E6700(2.67 GHz, 1066 MHz bus)
CPU MHz:	2667
FPU:	Integrated
CPU(s) enabled:	2 cores, 1 chip, 2 cores/chip
CPU(s) orderable:	1
Parallel:	No
Primary Cache:	32KBI + 32KBD per core, on chip
Secondary Cache:	4 MB(I+D) per chip, on chip (shared)
L3 Cache:	None
Other Cache:	None
Memory:	2 GB (2 1GB Micron MT16HTF12864AY-80ED4 DDR2 800, CL5)
Disk Subsystem:	Maxtor DiamondMax 10 6B300S0 300GB NCQ Serial ATA (7200 RPM, 16MB cache)
Other Hardware:	SoundBlaster Live! PCI card

Software

Operating System:	Windows XP Professional SP2
Compiler:	Intel C++ and Fortran Compiler 9.1 for 32-bit applications Build 20060323Z Package IDs: W_CC_P_9.1.020 and W_FC_P_9.1.020 Microsoft Visual Studio 2005(for libraries) SmartHeap Library Version 8.0 from http://www.microquill.com/
File System:	NTFS
System State:	Default

Notes/Tuning Information

```
+FDO: PASS1=  -Qprof_gen  PASS2=-Qprof_use
Base tuning for Fortran programs:  -fast -Qansi_alias +FDO
Base tuning for 177.mesa:   -fast   +FDO shlW32M.lib
Base tuning for 179.art:    -fast   +FDO shlW32M.lib
Base tuning for 183.equake: -fast   +FDO shlW32M.lib
Base tuning for 188.ammp:   -fast   +FDO shlW32M.lib
Portability:
178.galgel:   -FI /F32000000
Peak tuning:
168.wupwise:  -fast -Qansi_alias +FDO
171.swim:     -fast -Qansi_alias +FDO
172.mgrid:    -fast -Qansi_alias +FDO
173.applu:  basepeak=yes
177.mesa:   basepeak=yes
178.galgel:   -fast -Qansi_alias +FDO
179.art:      basepeak=yes
183.equake:   -QxP -Oa -Qrcd -Qipo  +FDO  shlW32M.lib
```

Copyright ©1999-2007, Standard Performance Evaluation Corporation

Notes/Tuning Information (Continued)

```
187.facerec:  -fast -Qunroll1 -Qscalar_rep- +FDO
188.ammp:     -fast -Oa +FDO  shlW32M.lib
189.lucas:    -fast -Qprefetch- +FDO
191.fma3d:    basepeak=yes
200.sixtrack: -Qipo -QxP +FDO
301.apsi:     -fast +FDO
Tested systems can be used with Shin-G ATX case, Antec NeoPower 480W power supply
Product description located as of 1/2007:
http://www.intel.com/products/motherboard/DG965WH/index.htm
The system bus runs at 1066 MHz
```