CINT2000 Result

Copyright ©1999-2007, Standard Performance Evaluation Corporation

Intel(R) Corporation

Intel(R) DG965WH motherboard(2.67 GHz, Intel(R) Core(TM) 2 Duo processor E6700)

SPECint_rate2000 = 59.1

SPECint_rate_base2000 = 59.1

SPEC license #: 13 | Tested by: Intel Corporation | Test date: Oct-2006 | Hardware Avail: Jul-2006 | Software Avail: May-2006

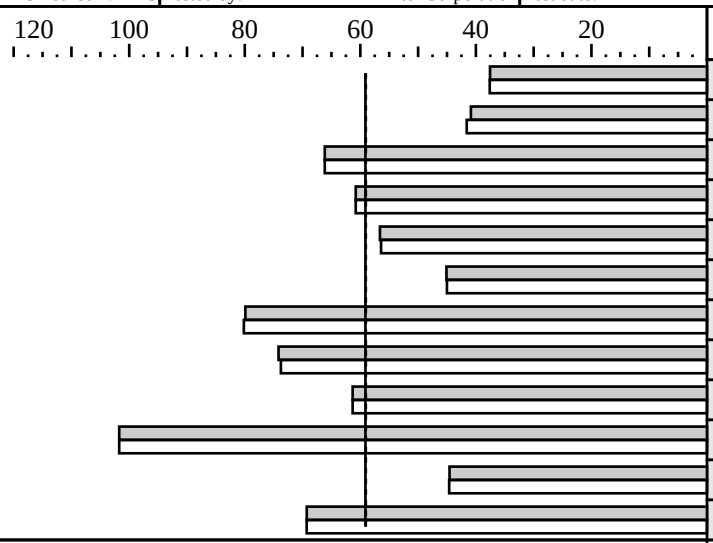

Benchmark	Base Copies	Base Runtime	Base Ratio	Copies	Runtime	Ratio
164.gzip	2	86.5	37.6	2	86.4	37.6
175.vpr	2	79.5	40.9	2	78.1	41.6
176.gcc	2	38.6	66.2	2	38.6	66.2
181.mcf	2	68.7	60.8	2	68.7	60.8
186.crafty	2	41.0	56.6	2	41.1	56.4
197.parser	2	92.6	45.1	2	92.8	45.0
252.eon	2	37.8	79.9	2	37.6	80.2
253.perlbmk	2	56.3	74.2	2	56.6	73.7
254.gap	2	41.6	61.3	2	41.6	61.3
255.vortex	2	43.3	102	2	43.3	102
256.bzip2	2	78.1	44.6	2	78.0	44.6
300.twolf	2	100	69.3	2	100	69.3

Hardware

CPU:	Intel(R) Core(TM) 2 Duo processor E6700(2.67 GHz, 1066 MHz bus)
CPU MHz:	2667
FPU:	Integrated
CPU(s) enabled:	2 cores, 1 chip, 2 cores/chip
CPU(s) orderable:	1
Parallel:	No
Primary Cache:	32KBI + 32KBD per core, on chip
Secondary Cache:	4 MB(I+D) per chip, on chip (shared)
L3 Cache:	None
Other Cache:	None
Memory:	2 GB (2 1GB Micron MT16HTF12864AY-80ED4 DDR2 800, CL5)
Disk Subsystem:	Maxtor DiamondMax 10 6B300S0 300GB NCQ Serial ATA (7200 RPM, 16MB cache)
Other Hardware:	SoundBlaster Live! PCI card

Software

Operating System:	Windows XP Professional SP2
Compiler:	Intel C++ Compiler 9.1 for 32-bit applications Build 20060323Z Package ID: W_CC_P_9.1.020 Microsoft Visual Studio 2005(for libraries) SmartHeap Library Version 8.0 from http://www.microquill.com/
File System:	NTFS
System State:	Default

Notes/Tuning Information

```
+FDO: PASS1=-Qprof_gen  PASS2=-Qprof_use
Base tuning for C programs:   -fast +FDO shlW32M.lib
Base tuning for C++ programs: -fast -Qcxx_features +FDO shlW32M.lib
Portability flags:
176.gcc: -Dalloca=_alloca /F10000000
186.crafty: -DNT_i386
252.eon:     -DHAS_ERRLIST
253.perlbmk: -DSPEC_CPU2000_NTOS -DPERLDLL /MT
254.gap: -DSYS_HAS_CALLOC_PROTO -DSYS_HAS_MALLOC_PROTO
Peak tuning:
164.gzip:     -fast -Qansi_alias -Oa  +FDO
175.vpr:      -fast -Qansi_alias +FDO
176.gcc:      basepeak=yes
181.mcf:      basepeak=yes
186.crafty:   -fast -Qansi_alias -Oa +FDO
197.parser:   -fast -Qansi_alias  +FDO
252.eon:      -fast +FDO
253.perlbmk:  -fast -Qansi_alias +FDO shlW32M.lib
254.gap:      basepeak=yes
255.vortex    basepeak=yes
```

Copyright ©1999-2007, Standard Performance Evaluation Corporation

Notes/Tuning Information (Continued)

256.bzip2: -fast -Oa -Qunroll1 +FDO
300.twolf: -fast -O3 +FDO shlW32M.lib
Tested systems can be used with Shin-G ATX case, Antec NeoPower 480W power supply
Product description located as of 1/2007:
http://www.intel.com/products/motherboard/DG965WH/index.htm
The system bus runs at 1066 MHz