CFP2000 Result

Copyright ©1999-2007, Standard Performance Evaluation Corporation

Itautec

Servidor Itautec MX201 (Intel Xeon processor E5345, 2.33 GHz)

SPECfp_rate2000 = 97.6

SPECfp_rate_base2000 = 97.6

SPEC license #: 9001 | Tested by: Itautec | Test date: Feb-2007 | Hardware Avail: Feb-2007 | Software Avail: May-2006

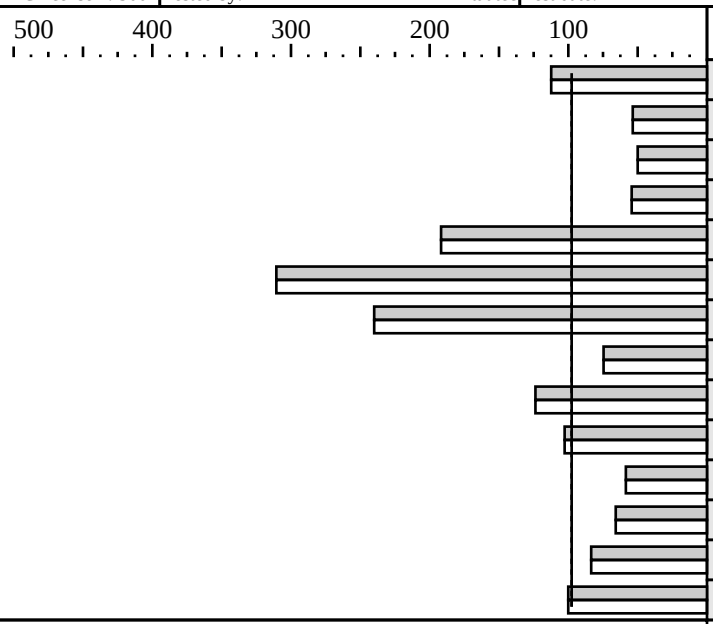

Benchmark	Base Copies	Base Runtime	Base Ratio	Copies	Runtime	Ratio
168.wupwise	8	132	112	8	132	112
171.swim	8	537	53.5	8	537	53.5
172.mgrid	8	334	50.0	8	334	50.0
173.applu	8	359	54.3	8	359	54.3
177.mesa	8	67.8	192	8	67.8	192
178.galgel	8	86.7	311	8	86.7	311
179.art	8	101	240	8	101	240
183.equake	8	162	74.6	8	162	74.6
187.facerec	8	143	124	8	143	124
188.ammp	8	199	103	8	199	103
189.lucas	8	317	58.5	8	317	58.5
191.fma3d	8	296	65.8	8	296	65.8
200.sixtrack	8	122	83.5	8	122	83.5
301.apsi	8	241	100	8	241	100

Hardware

CPU:	Intel Xeon processor E5345 (2.33 GHz, 2x4MB L2, 1333 MHz system bus)
CPU MHz:	2330
FPU:	Integrated
CPU(s) enabled:	8 cores, 2 chips, 4 cores/chip
CPU(s) orderable:	1,2
Parallel:	No
Primary Cache:	32KB(I) + 32KB(D) on chip, per core
Secondary Cache:	8 MB I+D on chip per chip (4 MB shared per 2 cores)
L3 Cache:	N/A
Other Cache:	N/A
Memory:	8x2GB DDR2-RAM PC2-5300F (CAS 5-5-5)
Disk Subsystem:	1 x 73GB SCSI 10000RPM
Other Hardware:	None

Software

Operating System:	Windows Server 2003 Enterprise Edition + SP1 (32-bit)
Compiler:	Intel C++ Compiler 9.1 Build 20060519Z (for 32-bit applications), Intel Fortran Compiler 9.1 Build 20060519Z (for 32-bit applications), Microsoft Visual Studio .NET 2003 7.1.3088 (for libraries) Microquill SmartHeap Library v.8.0 for SMP
File System:	NTFS
System State:	Default

Notes/Tuning Information

```
GENERAL
Basepeak=yes is used for all programs
+FDO: PASS1=-Qprof_gen  PASS2=-Qprof_use
PORTABILITY FLAGS
   178.galgel:  -FI /F32000000
Base tuning flags
   for Fortran programs: -fast -Qansi_alias +FDO
   for C programs:       -fast               +FDO shlSMPMt.lib

EXTRA LIBRARIES
  MicroQuill SmartHeap Library v.8.0 for SMP
  http://www.microquill.com

This result was measured on the Servidor Itautec MX221.
The Servidor Itautec MX201 and the Servidor Itautec MX221
are electronically equivalent.
```