CINT2000 Result

Copyright ©1999-2007, Standard Performance Evaluation Corporation

Itautec

Servidor Itautec MX201 (Intel Xeon processor E5310, 1.60 GHz)

SPECint_rate2000 = 128

SPECint_rate_base2000 = 128

SPEC license #: 9001 | Tested by: Itautec | Test date: Feb-2007 | Hardware Avail: Feb-2007 | Software Avail: May-2006

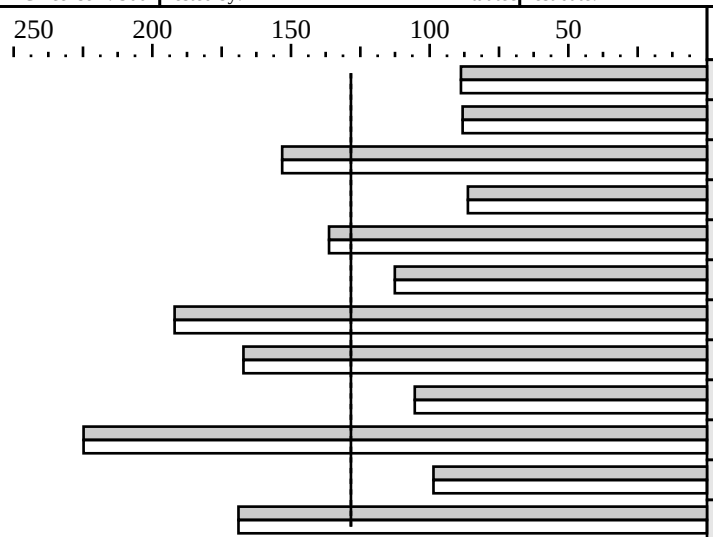

Benchmark	Base Copies	Base Runtime	Base Ratio	Copies	Runtime	Ratio
164.gzip	8	146	88.7	8	146	88.7
175.vpr	8	147	88.1	8	147	88.1
176.gcc	8	66.6	153	8	66.6	153
181.mcf	8	194	86.2	8	194	86.2
186.crafty	8	68.1	136	8	68.1	136
197.parser	8	148	113	8	148	113
252.eon	8	62.8	192	8	62.8	192
253.perlbmk	8	99.9	167	8	99.9	167
254.gap	8	96.9	105	8	96.9	105
255.vortex	8	78.4	225	8	78.4	225
256.bzip2	8	141	98.6	8	141	98.6
300.twolf	8	165	169	8	165	169

Hardware

CPU:	Intel Xeon processor E5310 (1.60 GHz, 2x4MB L2, 1066 MHz system bus)
CPU MHz:	1600
FPU:	Integrated
CPU(s) enabled:	8 cores, 2 chips, 4 cores/chip
CPU(s) orderable:	1,2
Parallel:	No
Primary Cache:	32KB(I) + 32KB(D) on chip, per core
Secondary Cache:	8 MB I+D on chip per chip (4 MB shared per 2 cores)
L3 Cache:	N/A
Other Cache:	N/A
Memory:	8x1GB DDR2-RAM PC2-5300F (CAS 5-5-5)
Disk Subsystem:	1 x 146GB SCSI 10000RPM
Other Hardware:	None

Software

Operating System:	Windows Server 2003 Enterprise Edition + SP1 (32-bit)
Compiler:	Intel C++ Compiler 9.1 Build 20060519Z (for 32-bit applications), Microsoft Visual Studio .NET 2003 7.1.3088 (for libraries) Microquill SmartHeap Library v.8.0 for SMP
File System:	NTFS
System State:	Default

Notes/Tuning Information

```
GENERAL
Basepeak=yes is used for all programs
+FDO: PASS1=-Qprof_gen  PASS2=-Qprof_use
Portability flags
   176.gcc:     -Dalloca=_alloca /F10000000
   186.crafty:  -DNT_i386
   253.perlbmk: -DSPEC_CPU2000_NTOS -DPERLDLL /MT
   254.gap:     -DSYS_HAS_CALLOC_PROTO -DSYS_HAS_MALLOC_PROTO
Base tuning flags
   for C programs:   -fast +FDO shlSMPMt.lib
   for C++ programs: -fast -Qcxx_features +FDO  shlSMPMt.lib
EXTRA LIBRARIES
  MicroQuill SmartHeap Library v.8.0 for SMP
  http://www.microquill.com

This result was measured on the Servidor Itautec MX221.
The Servidor Itautec MX201 and the Servidor Itautec MX221
are electronically equivalent.
```