CFP2000 Result

Copyright ©1999-2007, Standard Performance Evaluation Corporation

Hewlett-Packard Company

ProLiant BL460c (1.86 GHz, Intel Xeon processor E5320)

SPECfp2000 = 2074

SPECfp_base2000 = 1901

SPEC license #: 3 | Tested by: Hewlett-Packard Company | Test date: Feb-2007 | Hardware Avail: Jan-2007 | Software Avail: Nov-2006

Benchmark	Reference Time	Base Runtime	Base Ratio	Runtime	Ratio
168.wupwise	1600	57.8	2766	57.8	2766
171.swim	3100	142	2188	136	2274
172.mgrid	1800	138	1304	106	1696
173.applu	2100	147	1432	110	1901
177.mesa	1400	71.2	1966	66.1	2119
178.galgel	2900	65.3	4444	65.3	4444
179.art	2600	34.6	7524	34.9	7447
183.equake	1300	73.9	1758	61.5	2115
187.facerec	1900	92.6	2052	66.9	2842
188.ammp	2200	156	1413	156	1413
189.lucas	2000	122	1639	121	1653
191.fma3d	2100	139	1515	139	1515
200.sixtrack	1100	154	715	154	715
301.apsi	2600	218	1195	206	1265

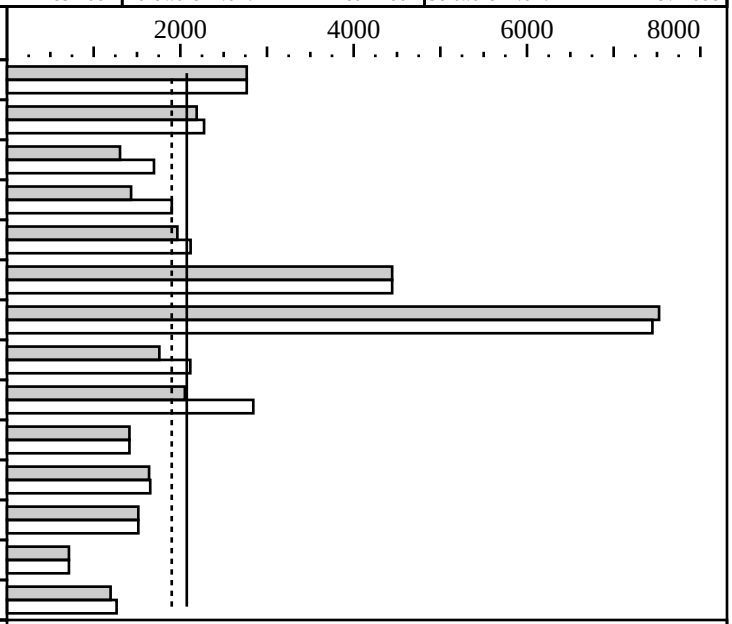

Hardware

CPU:	Intel Xeon processor E5320 (1.86 GHz, 2x4 MB L2 shared, 1066 MHz bus)
CPU MHz:	1860
FPU:	Integrated
CPU(s) enabled:	1 core, 1 chip, 4 cores/chip
CPU(s) orderable:	1,2 chips
Parallel:	No
Primary Cache:	32 KB I + 32 KB D on chip per core
Secondary Cache:	8 MB I+D on chip per chip (4 MB shared per 2 cores)
L3 Cache:	N/A
Other Cache:	N/A
Memory:	16 GB (8x2 GB PC2-5300F CL5)
Disk Subsystem:	1x72 GB 10K SAS
Other Hardware:	

Software

Operating System:	SuSE Linux Enterprise Server 10 (x86_64) Kernel 2.6.16.21-0.8-default
Compiler:	Intel C++ Compiler for EM64T-based applications, (Version 9.1 Build 20061101) Intel Fortran Compiler for EM64T-based applications, (Version 9.1 Build 20061101) PathScale EKOPath(TM) Compiler Suite, Release 2.5
File System:	ext2
System State:	Multi-user run level 3

Notes/Tuning Information

```
+FDO: PASS1= -prof_gen  PASS2=-prof_use (Intel Compiler)
+FDO: PASS1= -fb_create fbdata PASS2=-fb_opt fbdata (PathScale Compiler)
ifort is the Intel Fortran compiler, icc is the Intel C++ compiler; and
pathf95 is PathScale Fortran compiler, pathcc is the PathScale C compiler.
Base tuning for C programs:  icc -fast -auto_ilp32 +FDO
Base tuning for FORTRAN programs:  ifort -fast +FDO
Portability:
  -DSPEC_CPU2000_LP64 applied to all benchmarks
  178.galgel:   -FI
Peak tuning:
  168.wupwise:  basepeak=1
  171.swim:     pathf95 -Ofast -LNO:fusion=2:simd=0 -WOPT:val=0 -march=em64t
  172.mgrid:    pathf95 -Ofast -CG:load_exe=0 -LNO:blocking=off:prefetch_ahead=5
                -OPT:ro=3:unroll_size=256 -WOPT:mem_opnds=on -march=em64t
  173.applu:    pathf95 -O3 -ipa -CG:load_exe=0
                -LNO:fission=1:fusion=2:blocking=off:full_unroll_size=9000
                -OPT:IEEE_a=3:ro=3 -TENV:X=3 -march=em64t
```

Copyright ©1999-2007, Standard Performance Evaluation Corporation

Notes/Tuning Information (Continued)

```
    177.mesa:     pathcc -O2 -ipa -OPT:Ofast -fno-math-errno -CG:local_fwd_sched=on
                  -GRA:optimize_boundary=on -march=em64t +FDO
    178.galgel:   basepeak=1
    179.art:      icc -fast -auto_ilp32 +FDO
    183.equake:   icc -fast +FDO ONESTEP=yes -rcd -auto-ilp32
    187.facerec:  pathf95 -Ofast -IPA:plimit=1500 -LNO:fusion=2
                  -OPT:IEEE_NaN_Inf=off:ro=3:unroll_size=0 -march=em64t +FDO
    188.ammp:     basepeak=1
    189.lucas:    ifort -fast ONESTEP=yes
    191.fma3d:    basepeak=1
    200.sixtrack: basepeak=1
    301.apsi:     pathf95 -Ofast -CG:load_exe=0 -LNO:opt=0:prefetch=1 -march=em64t
 BIOS Configuration Notes
  Power Regulator set to Static High Performance Mode
  Adjacent Sector Prefetch disabled
Other Configuration Notes
  Taskset utility used to bind process to CPU(s)
  "ulimit -s unlimited" set
  Single user kernel used
```