SPEC® CFP2006 Result

Hewlett-Packard Company

HP Integrity rx7640 (1.6GHz/18MB Dual-Core Intel Itanium 2)

SPECfp®_rate2006 = 90.8

SPECfp_rate_base2006 = 87.4

CPU2006 license:	03	**Test date:**	Sep-2006
Test sponsor:	Hewlett-Packard Company	**Hardware Availability:**	Sep-2006
Tested by:	Hewlett-Packard Company	**Software Availability:**	Sep-2006

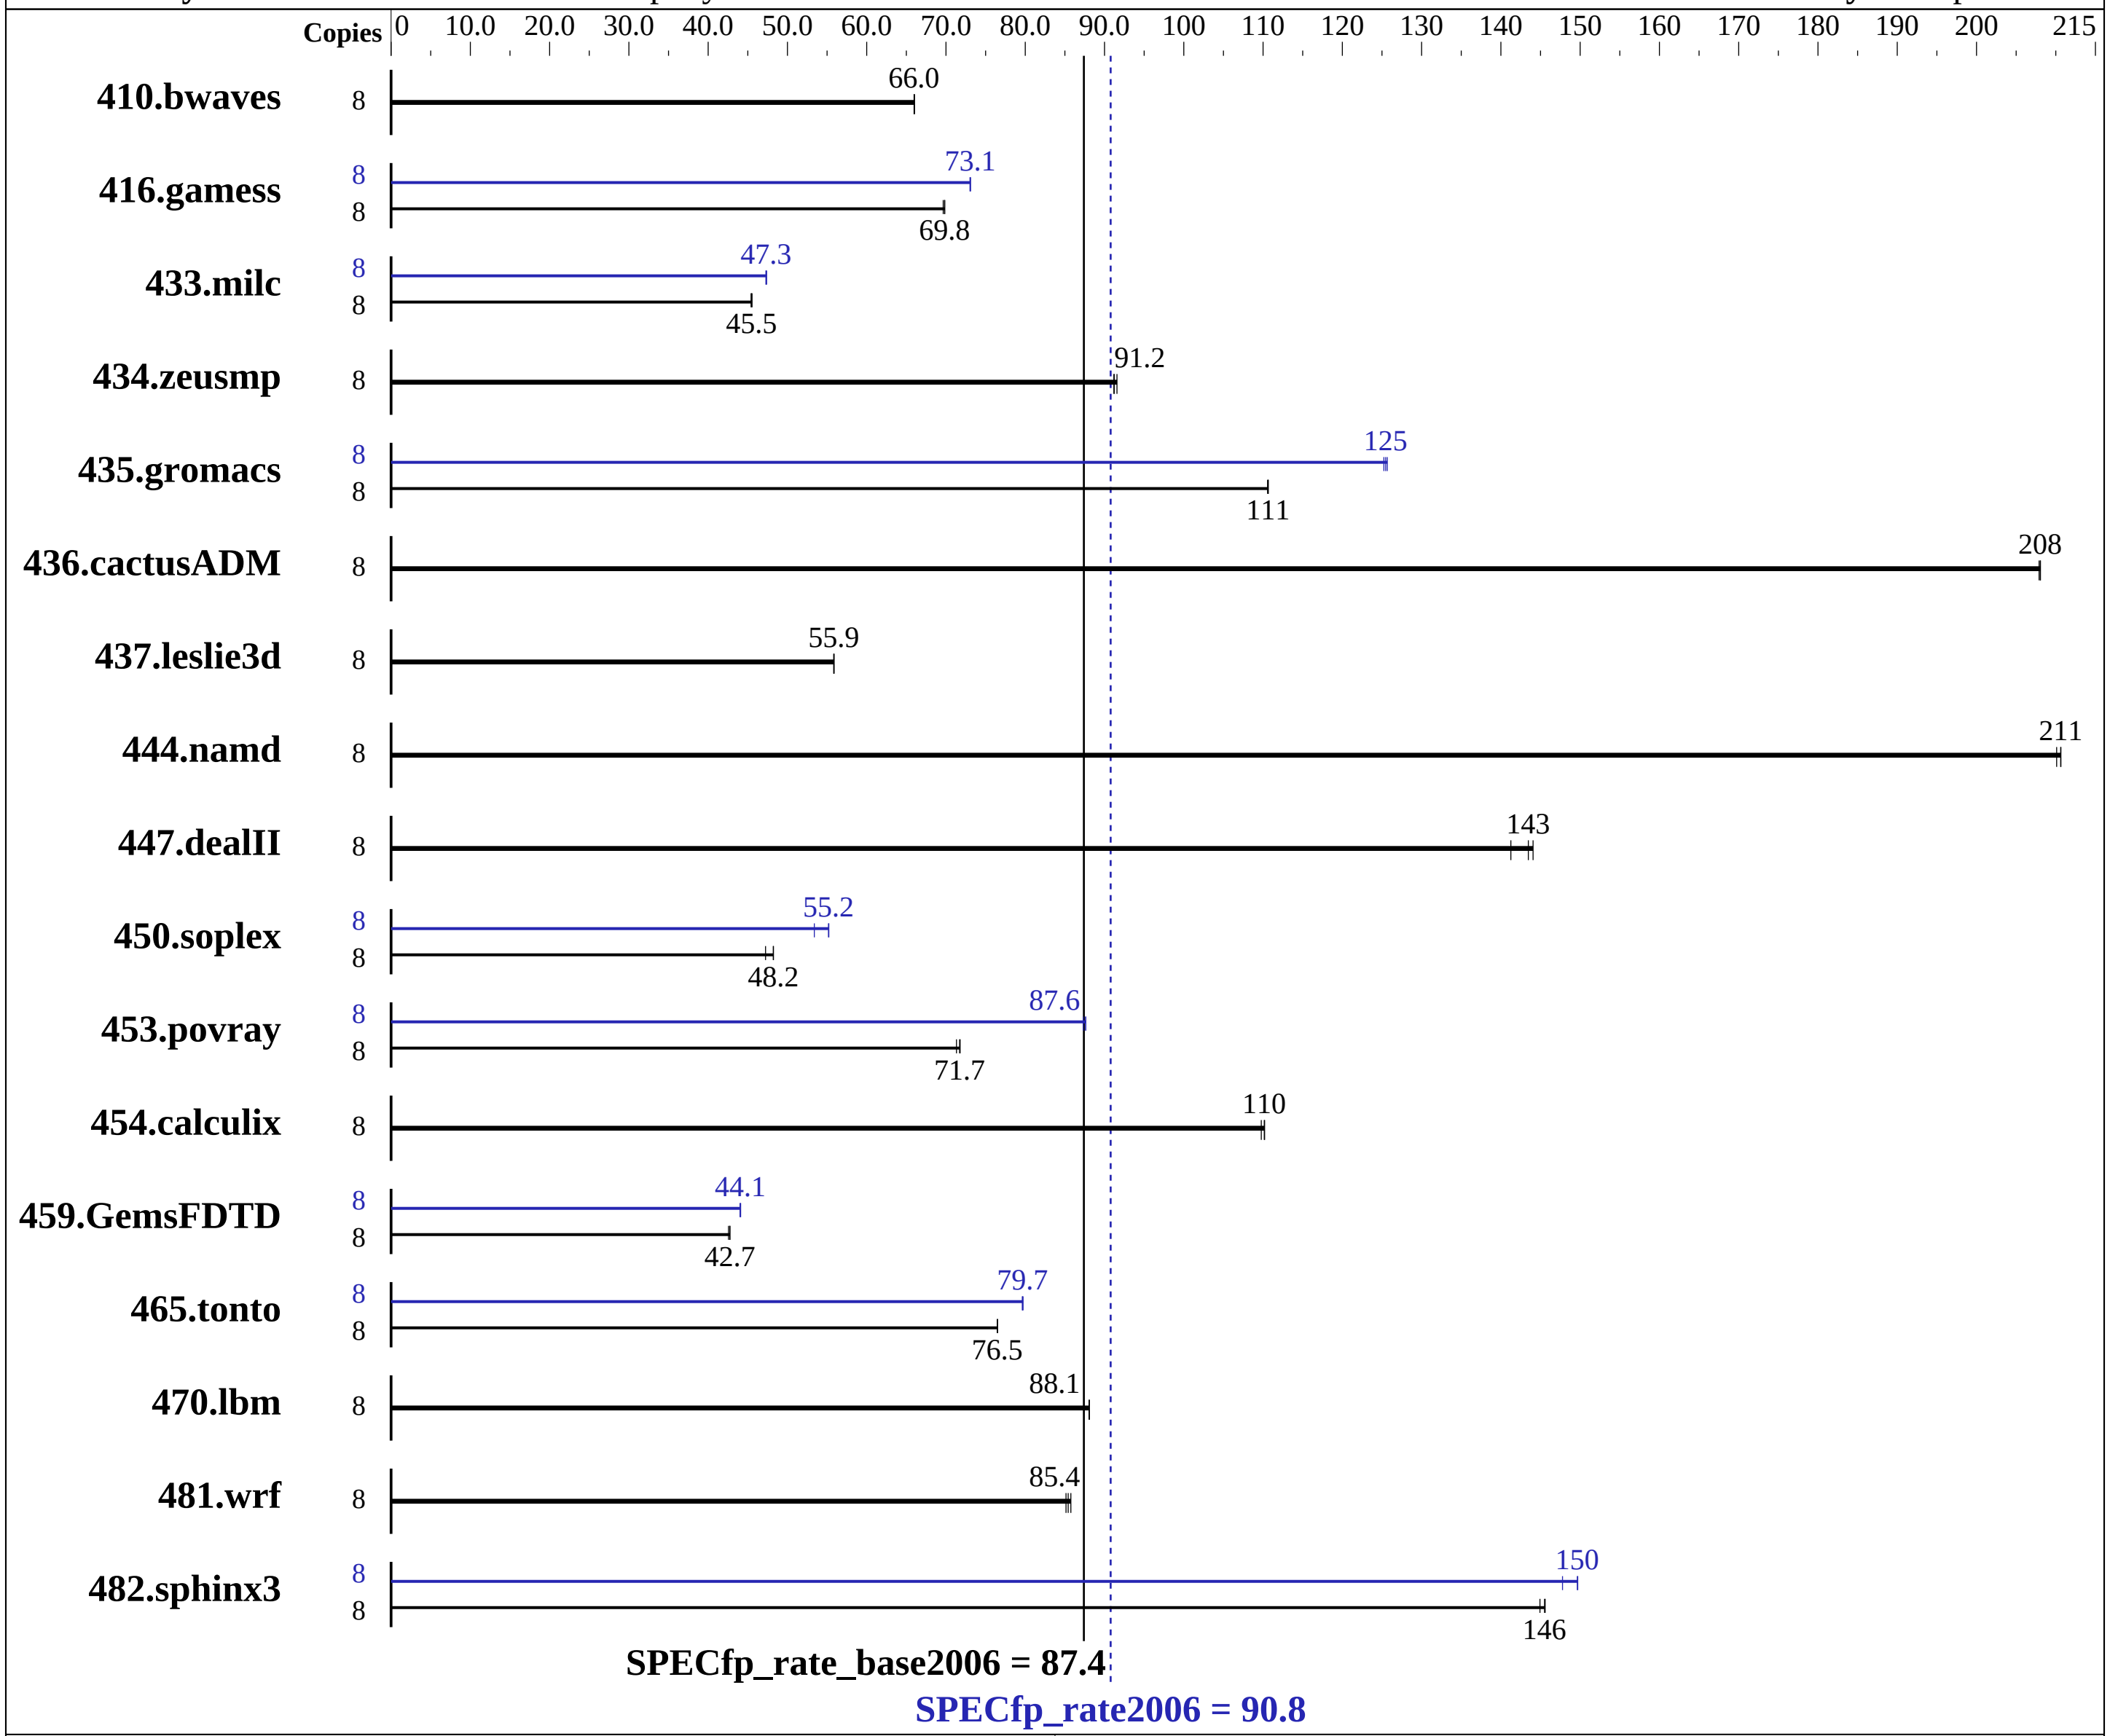

Hardware

CPU Name:	Dual-Core Intel Itanium 2 9040
CPU Characteristics:	1.6GHz/18MB, 533MHz FSB
CPU MHz:	1600
FPU:	Integrated
CPU(s) enabled:	8 cores, 4 chips, 2 cores/chip
CPU(s) orderable:	1-8 chips
Primary Cache:	16 KB I + 16 KB D on chip per core
Secondary Cache:	1 MB I + 256 KB D on chip per core

Continued on next page

Software

Operating System:	HPUX11i-TCOE B.11.23.0609
Compiler:	HP C/aC++ Developer's Bundle C.11.23.12 HP Fortran90 Compiler B.11.23.32
Auto Parallel:	No
File System:	vxfs
System State:	Multi-user
Base Pointers:	32-bit
Peak Pointers:	32-bit
Other Software:	None

Hewlett-Packard Company

HP Integrity rx7640 (1.6GHz/18MB Dual-Core Intel Itanium 2)

SPECfp_rate2006 = 90.8

SPECfp_rate_base2006 = 87.4

CPU2006 license: 03
Test sponsor: Hewlett-Packard Company
Tested by: Hewlett-Packard Company
Test date: Sep-2006
Hardware Availability: Sep-2006
Software Availability: Sep-2006

L3 Cache:	9 MB I+D on chip per core
Other Cache:	None
Memory:	32 GB (16x2GB DIMMs)
Disk Subsystem:	36GB 15K RPM SCSI
Other Hardware:	None

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	8	**1648**	**66.0**	1647	66.0	1648	66.0	8	**1648**	**66.0**	1647	66.0	1648	66.0
416.gamess	8	2249	69.7	2243	69.8	**2244**	**69.8**	8	2145	73.0	2143	73.1	**2144**	**73.1**
433.milc	8	1617	45.4	**1615**	**45.5**	1613	45.5	8	**1553**	**47.3**	1550	47.4	1553	47.3
434.zeusmp	8	798	91.2	795	91.6	**798**	**91.2**	8	798	91.2	795	91.6	**798**	**91.2**
435.gromacs	8	517	111	**516**	**111**	516	111	8	456	125	**455**	**125**	455	126
436.cactusADM	8	460	208	**460**	**208**	459	208	8	460	208	**460**	**208**	459	208
437.leslie3d	8	1347	55.8	**1346**	**55.9**	1346	55.9	8	1347	55.8	**1346**	**55.9**	1346	55.9
444.namd	8	305	210	**305**	**211**	305	211	8	305	210	**305**	**211**	305	211
447.dealII	8	**638**	**143**	648	141	635	144	8	**638**	**143**	648	141	635	144
450.soplex	8	1412	47.2	**1384**	**48.2**	1383	48.2	8	1250	53.4	1208	55.2	**1209**	**55.2**
453.povray	8	597	71.3	**593**	**71.7**	593	71.8	8	487	87.3	**486**	**87.6**	486	87.6
454.calculix	8	601	110	**599**	**110**	599	110	8	601	110	**599**	**110**	599	110
459.GemsFDTD	8	**1986**	**42.7**	1986	42.7	1994	42.6	8	1928	44.0	1925	44.1	**1927**	**44.1**
465.tonto	8	**1029**	**76.5**	1029	76.5	1029	76.5	8	987	79.7	**988**	**79.7**	988	79.6
470.lbm	8	1248	88.1	**1248**	**88.1**	1248	88.1	8	1248	88.1	**1248**	**88.1**	1248	88.1
481.wrf	8	1050	85.1	1042	85.8	**1046**	**85.4**	8	1050	85.1	1042	85.8	**1046**	**85.4**
482.sphinx3	8	1076	145	1071	146	**1072**	**146**	8	1055	148	1042	150	**1042**	**150**

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Operating System Notes

```
The system had the September 2006 HP-UX 11i v2 Technical Computing
Operating Environment (TCOE) and compilers installed, along with
the following patches:

PHSS_34858  linker + fdp cumulative patch
PHSS_34853  Math Library Cumulative Patch
PHSS_34854  Integrity Unwind Library
PHSS_34855  HP C Compiler (A.06.12)
PHSS_34856  aC++ Compiler (A.06.12)
PHSS_34857  u2comp/be/plugin library patch
PHSS_34395  FORTRAN I/O Library [libIO77]
PHSS_34397  FORTRAN Intrinsics [libF90 B.11.23.17]
PHSS_34399  Fortran Product Patch, v3.1 to v3.1.1
PHKL_34020  Perfmon enhancements and Itanium Dual-Core
```

Continued on next page

Operating System Notes (Continued)

```
The following kernel tunables were set, in addition to the defaults
set by the Technical Computing OE:

dbc_max_pct=20
dbc_min_pct=20
maxdsiz=3221225472
maxssiz=401604608
```

Platform Notes

```
The system was configured as a single partition with 1 cell and
4 processors (8 cores) per cell.

The following config file entry was used to bind
processes to cells using the HP-UX "mpsched" utility:
submit = let "MYNUM=$SPECCOPYNUM" ; let "LDOM=\$MYNUM/8" ; mpsched -l \$LDOM $command
```

Base Compiler Invocation

C benchmarks:
`/opt/ansic/bin/cc -Ae`

C++ benchmarks:
`/opt/aCC/bin/aCC -Aa`

Fortran benchmarks:
`/opt/fortran90/bin/f90`

Benchmarks using both Fortran and C:
`/opt/ansic/bin/cc -Ae /opt/fortran90/bin/f90`

Base Portability Flags

453.povray: `-DSPEC_CPU_NEED_INVHYP`
454.calculix: `-DSPEC_CPU_NOZMODIFIER`
481.wrf: `-DNOUNDERSCORE +noppu`

Base Optimization Flags

C benchmarks:
`+Ofaster +Otype_safety=ansi -Wl,-a,archive_shared -Wl,+pd,64M -Wl,+pi,64M -Wl,-N`

Continued on next page

SPEC CFP2006 Result

Hewlett-Packard Company

HP Integrity rx7640 (1.6GHz/18MB Dual-Core Intel Itanium 2)

SPECfp_rate2006 = 90.8

SPECfp_rate_base2006 = 87.4

CPU2006 license: 03		**Test date:**	Sep-2006
Test sponsor:	Hewlett-Packard Company	**Hardware Availability:**	Sep-2006
Tested by:	Hewlett-Packard Company	**Software Availability:**	Sep-2006

Base Optimization Flags (Continued)

C++ benchmarks:
`+Ofaster +Otype_safety=ansi -Wl,-a,archive_shared -Wl,+pd,64M -Wl,+pi,64M -Wl,-N`

Fortran benchmarks:
`+Ofaster -Wl,-a,archive_shared -Wl,+pd,64M -Wl,+pi,64M -Wl,-N`

Benchmarks using both Fortran and C:
`+Ofaster`(-hp_cc) `+Otype_safety=ansi -Wl,-a,archive_shared -Wl,+pd,64M -Wl,+pi,64M +Ofaster`(-hp_f90) `-Wl,-N`

Peak Compiler Invocation

C benchmarks:
`/opt/ansic/bin/cc -Ae`

C++ benchmarks:
`/opt/aCC/bin/aCC -Aa`

Fortran benchmarks:
`/opt/fortran90/bin/f90`

Benchmarks using both Fortran and C:
`/opt/ansic/bin/cc -Ae /opt/fortran90/bin/f90`

Peak Portability Flags

453.povray: `-DSPEC_CPU_NEED_INVHYP`
454.calculix: `-DSPEC_CPU_NOZMODIFIER`
481.wrf: `-DNOUNDERSCORE +noppu`

Peak Optimization Flags

C benchmarks:

433.milc: `+Oprofile=collect:all`(pass 1) `+Oprofile=use`(pass 2) `+Ofaster +Otype_safety=ansi -Wl,-a,archive_shared -Wl,+pd,64M -Wl,+pi,64M +Onoparmsoverlap -Wl,-N`

470.lbm: `basepeak = yes`

482.sphinx3: `+Oprofile=collect:all`(pass 1) `+Oprofile=use`(pass 2) `+Ofaster +Otype_safety=ansi -Wl,-a,archive_shared -Wl,+pd,64M -Wl,+pi,64M +Onoparmsoverlap`

Continued on next page

Hewlett-Packard Company

HP Integrity rx7640 (1.6GHz/18MB Dual-Core Intel Itanium 2)

SPECfp_rate2006 = 90.8

SPECfp_rate_base2006 = 87.4

CPU2006 license: 03
Test sponsor: Hewlett-Packard Company
Tested by: Hewlett-Packard Company
Test date: Sep-2006
Hardware Availability: Sep-2006
Software Availability: Sep-2006

Peak Optimization Flags (Continued)

C++ benchmarks:

444.namd: basepeak = yes

447.dealII: basepeak = yes

450.soplex: +Oprofile=collect:all(pass 1) +Oprofile=use(pass 2) +Ofaster +Otype_safety=ansi -Wl,-a,archive_shared -Wl,+pd,64M -Wl,+pi,64M +Onoparmsoverlap -Wl,-N

453.povray: +Oprofile=collect:all(pass 1) +Oprofile=use(pass 2) +Ofaster +Otype_safety=ansi -Wl,-a,archive_shared -Wl,+pd,64M -Wl,+pi,64M

Fortran benchmarks:

410.bwaves: basepeak = yes

416.gamess: +Ofaster -Wl,-a,archive_shared -Wl,+pd,64M -Wl,+pi,64M +Odataprefetch=direct -Wl,-N

434.zeusmp: basepeak = yes

437.leslie3d: basepeak = yes

459.GemsFDTD: +Oprofile=collect:all(pass 1) +Oprofile=use(pass 2) +Ofaster -Wl,-a,archive_shared -Wl,+pd,64M -Wl,+pi,64M +Odataprefetch=direct -Wl,-N

465.tonto: +Oprofile=collect:all(pass 1) +Oprofile=use(pass 2) +Ofaster -Wl,-a,archive_shared -Wl,+pd,64M -Wl,+pi,64M +Odataprefetch=direct

Benchmarks using both Fortran and C:

435.gromacs: +Oprofile=collect:all(pass 1) +Oprofile=use(pass 2) +Ofaster(-hp_cc) +Otype_safety=ansi -Wl,-a,archive_shared -Wl,+pd,64M -Wl,+pi,64M +Onoparmsoverlap +Ofaster(-hp_f90)

436.cactusADM: basepeak = yes

454.calculix: basepeak = yes

481.wrf: basepeak = yes

The flags file that was used to format this result can be browsed at
http://www.spec.org/cpu2006/flags/CPU2006_flags.20090715.06.html

You can also download the XML flags source by saving the following link:

http://www.spec.org/cpu2006/flags/CPU2006_flags.20090715.06.xml

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.0.
Report generated on Tue Jul 22 10:06:00 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 3 October 2006.