



SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Bull SAS

SPECint®2006 = 12.7

NovaScale B260 (Intel Xeon processor 5130,2.0GHz)

SPECint_base2006 = 12.2

CPU2006 license: 20


Test sponsor: Bull SAS

Tested by: Bull SAS

Test date: Dec-2006

Hardware Availability: Dec-2006

Software Availability: Dec-2006

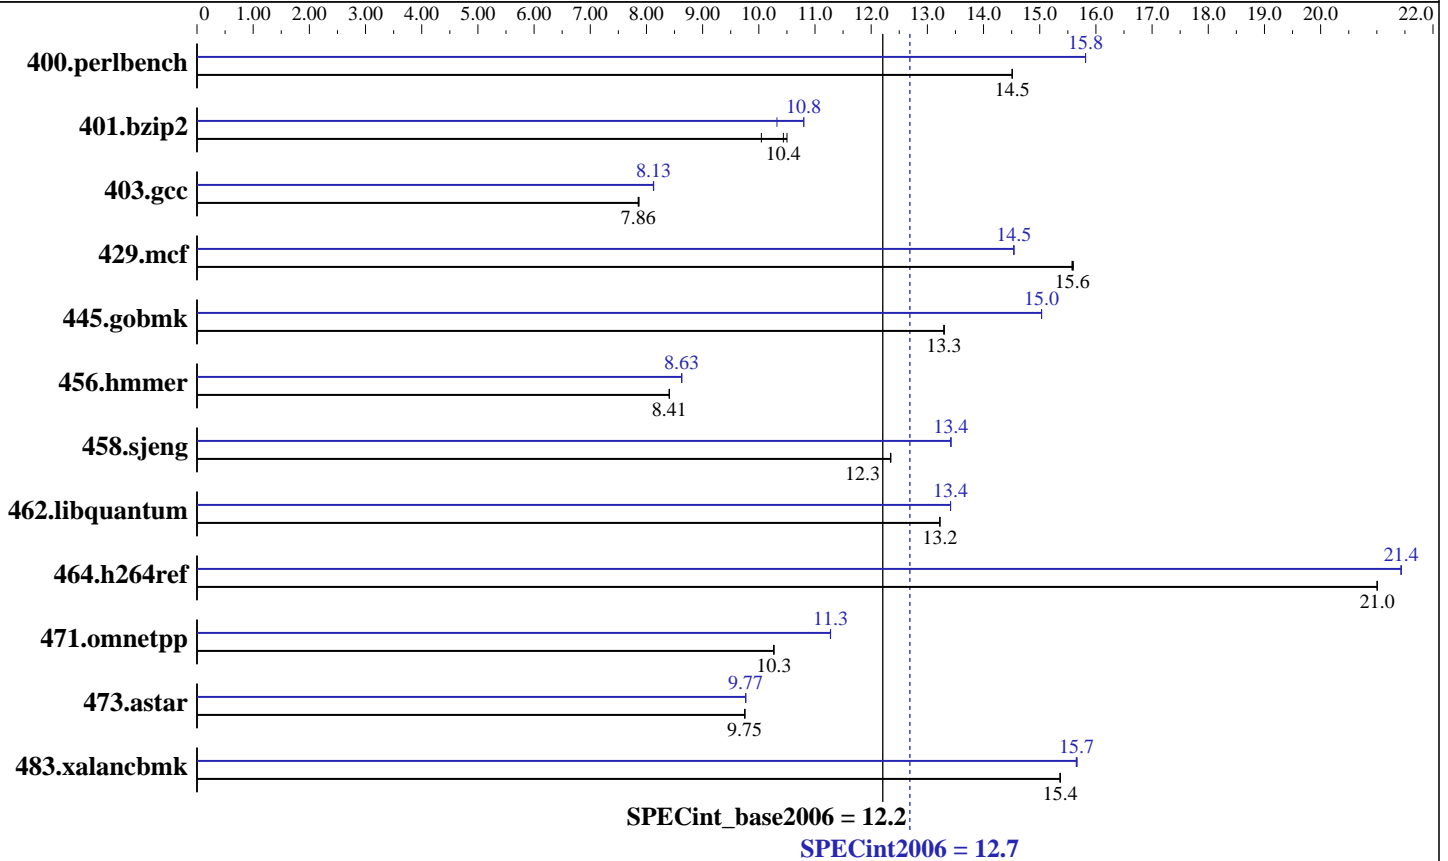

Hardware

CPU Name: Intel Xeon 5130
 CPU Characteristics: 2.0 GHz, 4MB L2, 1333MHz bus
 CPU MHz: 2000
 FPU: Integrated
 CPU(s) enabled: 1 core, 1 chip, 2 cores/chip
 CPU(s) orderable: 1 to 2 chips
 Primary Cache: 32 KB I + 32 KB D on chip per core
 Secondary Cache: 4 MB I+D on chip per chip
 L3 Cache: None
 Other Cache: None
 Memory: 8 GB (2GB DIMMx4, FB-DIMM PC2-5300F ECC CL5)
 Disk Subsystem: 73 GB SAS, 10000RPM
 Other Hardware: None

Software

Operating System: Windows Server 2003 Enterprise Edition (32 bits) Service Pack1
 Compiler: Intel C++ Compiler for IA32 version 9.1 Package ID W_CC_C_9.1.033 Build no 20061103Z Microsoft Visual Studio .NET 2003 (lib & linker)
 Auto Parallel: No
 File System: NTFS
 System State: Default
 Base Pointers: 32-bit
 Peak Pointers: 32-bit
 Other Software: MicroQuill SmartHeap Library 8.0 (shIW32M.lib)



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Bull SAS

SPECint2006 = **12.7**

NovaScale B260 (Intel Xeon processor 5130,2.0GHz)

SPECint_base2006 = **12.2**

CPU2006 license: 20
Test sponsor: Bull SAS
Tested by: Bull SAS

Test date: Dec-2006
Hardware Availability: Dec-2006
Software Availability: Dec-2006

Results Table

Benchmark	Base						Peak					
	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	673	14.5	673	14.5	<u>673</u>	<u>14.5</u>	618	15.8	<u>618</u>	<u>15.8</u>	618	15.8
401.bzip2	<u>925</u>	<u>10.4</u>	961	10.0	919	10.5	894	10.8	935	10.3	<u>894</u>	<u>10.8</u>
403.gcc	1023	7.87	1025	7.85	<u>1024</u>	<u>7.86</u>	<u>991</u>	<u>8.13</u>	990	8.13	991	8.12
429.mcf	585	15.6	<u>585</u>	<u>15.6</u>	586	15.6	627	14.5	627	14.5	<u>627</u>	<u>14.5</u>
445.gobmk	<u>789</u>	<u>13.3</u>	789	13.3	789	13.3	698	15.0	<u>698</u>	<u>15.0</u>	698	15.0
456.hammer	<u>1110</u>	<u>8.41</u>	1110	8.41	1110	8.41	1082	8.63	<u>1081</u>	<u>8.63</u>	1081	8.63
458.sjeng	<u>980</u>	<u>12.3</u>	980	12.3	980	12.3	902	13.4	<u>902</u>	<u>13.4</u>	902	13.4
462.libquantum	1567	13.2	<u>1567</u>	<u>13.2</u>	1567	13.2	<u>1545</u>	<u>13.4</u>	1545	13.4	1545	13.4
464.h264ref	1053	21.0	<u>1053</u>	<u>21.0</u>	1054	21.0	1032	21.4	<u>1032</u>	<u>21.4</u>	1033	21.4
471.omnetpp	609	10.3	<u>609</u>	<u>10.3</u>	609	10.3	554	11.3	554	11.3	<u>554</u>	<u>11.3</u>
473.astar	720	9.75	<u>720</u>	<u>9.75</u>	720	9.75	719	9.77	719	9.77	<u>719</u>	<u>9.77</u>
483.xalancbmk	449	15.4	<u>449</u>	<u>15.4</u>	449	15.4	440	15.7	441	15.6	<u>441</u>	<u>15.7</u>

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

General Notes

Other Configuration Notes
/NUMPROC=1 flag was added to boot.ini to invoke uniprocessor environment

Base Compiler Invocation

C benchmarks:
icl -Qvc7.1 -Qc99

C++ benchmarks:
icl -Qvc7.1

Base Portability Flags

403.gcc: -DSPEC_CPU_WIN32
464.h264ref: -DSPEC_CPU_NO_INTTYPES -DWIN32

Base Optimization Flags

C benchmarks:
-fast /F512000000 shlw32m.lib -link /FORCE:MULTIPLE

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Bull SAS

SPECint2006 = 12.7

NovaScale B260 (Intel Xeon processor 5130,2.0GHz)

SPECint_base2006 = 12.2

CPU2006 license: 20

Test date: Dec-2006

Test sponsor: Bull SAS

Hardware Availability: Dec-2006

Tested by: Bull SAS

Software Availability: Dec-2006

Base Optimization Flags (Continued)

C++ benchmarks:

```
-fast -Qcxx_features /F512000000 shlw32m.lib
-link /FORCE:MULTIPLE
```

Base Other Flags

C benchmarks:

```
403.gcc: -Dalloca=_alloca
```

Peak Compiler Invocation

C benchmarks:

```
icl -Qvc7.1 -Qc99
```

C++ benchmarks:

```
icl -Qvc7.1
```

Peak Portability Flags

```
403.gcc: -DSPEC_CPU_WIN32
464.h264ref: -DSPEC_CPU_NO_INTTYPES -DWIN32
```

Peak Optimization Flags

C benchmarks:

```
-Qprof_gen(pass 1) -Qprof_use(pass 2) -fast /F512000000 shlw32m.lib
-link /FORCE:MULTIPLE
```

C++ benchmarks:

```
-Qprof_gen(pass 1) -Qprof_use(pass 2) -fast -Qcxx_features
/F512000000 shlw32m.lib -link /FORCE:MULTIPLE
```

Peak Other Flags

C benchmarks:

```
403.gcc: -Dalloca=_alloca
```



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Bull SAS

SPECint2006 = 12.7

NovaScale B260 (Intel Xeon processor 5130,2.0GHz)

SPECint_base2006 = 12.2

CPU2006 license: 20

Test sponsor: Bull SAS

Tested by: Bull SAS

Test date: Dec-2006

Hardware Availability: Dec-2006

Software Availability: Dec-2006

The flags file that was used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/flags.20090714.00.html>

You can also download the XML flags source by saving the following link:

<http://www.spec.org/cpu2006/flags/flags.20090714.00.xml>

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.0.
Report generated on Tue Jul 22 10:18:23 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 6 February 2007.