



# SPEC<sup>®</sup> CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Bull SAS

### SPECint<sup>®</sup>\_rate2006 = 46.8

NovaScale B260 (Intel Xeon processor 5150,2.66GHz)

### SPECint\_rate\_base2006 = 45.3

CPU2006 license: 20


Test sponsor: Bull SAS

Tested by: Bull SAS

Test date: Dec-2006

Hardware Availability: Dec-2006

Software Availability: Dec-2006

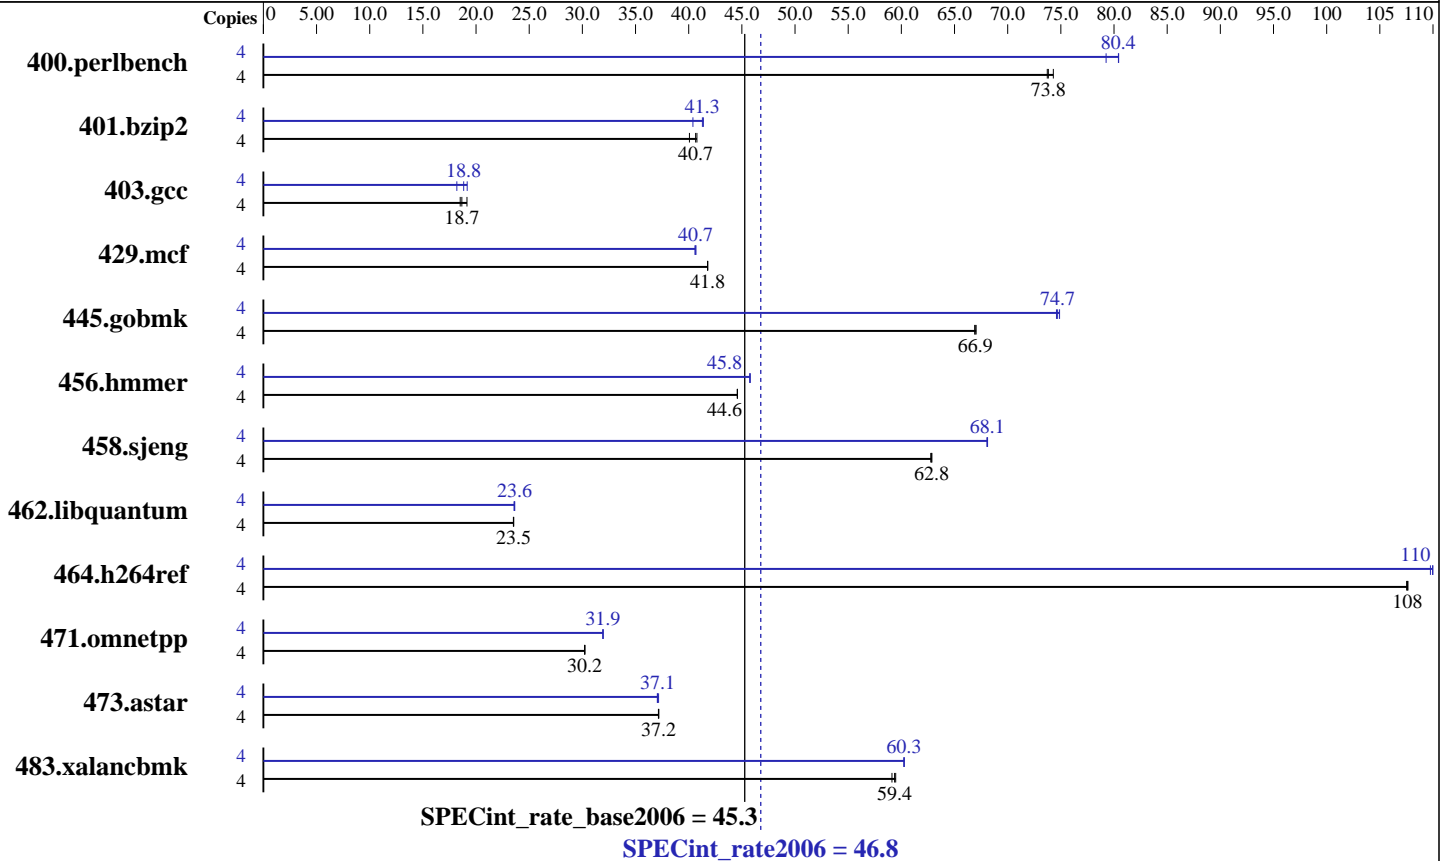

### Hardware

CPU Name: Intel Xeon 5150  
 CPU Characteristics: 2.66 GHz, 4MB L2, 1333MHz bus  
 CPU MHz: 2660  
 FPU: Integrated  
 CPU(s) enabled: 4 cores, 2 chips, 2 cores/chip  
 CPU(s) orderable: 1 to 2 chips  
 Primary Cache: 32 KB I + 32 KB D on chip per core  
 Secondary Cache: 4 MB I+D on chip per chip  
 L3 Cache: None  
 Other Cache: None  
 Memory: 8 GB (2GB DIMMx4, FB-DIMM PC2-5300F ECC CL5)  
 Disk Subsystem: 73 GB SAS, 10000RPM  
 Other Hardware: None

### Software

Operating System: Windows Server 2003 Enterprise Edition (32 bits) Service Pack1  
 Compiler: Intel C++ Compiler for IA32 version 9.1 Package ID W\_CC\_C\_9.1.033 Build no 20061103Z Microsoft Visual Studio .NET 2003 (lib & linker)  
 Auto Parallel: No  
 File System: NTFS  
 System State: Default  
 Base Pointers: 32-bit  
 Peak Pointers: 32-bit  
 Other Software: MicroQuill SmartHeap Library 8.0 (shIW32M.lib)



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Bull SAS

SPECint\_rate2006 = 46.8

NovaScale B260 (Intel Xeon processor 5150,2.66GHz)

SPECint\_rate\_base2006 = 45.3

CPU2006 license: 20  
Test sponsor: Bull SAS  
Tested by: Bull SAS

Test date: Dec-2006  
Hardware Availability: Dec-2006  
Software Availability: Dec-2006

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	4	<u>529</u>	<u>73.8</u>	530	73.7	526	74.3	4	493	79.3	<u>486</u>	<u>80.4</u>	486	80.4
401.bzip2	4	963	40.1	947	40.8	<u>950</u>	<u>40.7</u>	4	956	40.4	933	41.4	<u>935</u>	<u>41.3</u>
403.gcc	4	<u>1725</u>	<u>18.7</u>	1682	19.1	1739	18.5	4	1770	18.2	1680	19.2	<u>1709</u>	<u>18.8</u>
429.mcf	4	873	41.8	873	41.8	<u>873</u>	<u>41.8</u>	4	<u>897</u>	<u>40.7</u>	897	40.7	899	40.6
445.gobmk	4	<u>627</u>	<u>66.9</u>	626	67.0	627	66.9	4	563	74.6	560	74.9	<u>562</u>	<u>74.7</u>
456.hammer	4	837	44.6	837	44.6	<u>837</u>	<u>44.6</u>	4	815	45.8	816	45.8	<u>815</u>	<u>45.8</u>
458.sjeng	4	<u>770</u>	<u>62.8</u>	770	62.9	771	62.8	4	711	68.0	<u>711</u>	<u>68.1</u>	711	68.1
462.libquantum	4	3520	23.5	3525	23.5	<u>3523</u>	<u>23.5</u>	4	3506	23.6	3516	23.6	<u>3508</u>	<u>23.6</u>
464.h264ref	4	823	108	822	108	<u>823</u>	<u>108</u>	4	807	110	805	110	<u>805</u>	<u>110</u>
471.omnetpp	4	828	30.2	827	30.2	<u>827</u>	<u>30.2</u>	4	<u>783</u>	<u>31.9</u>	783	31.9	782	32.0
473.astar	4	756	37.2	<u>756</u>	<u>37.2</u>	755	37.2	4	758	37.1	<u>757</u>	<u>37.1</u>	756	37.2
483.xalancbmk	4	467	59.1	464	59.5	<u>465</u>	<u>59.4</u>	4	<u>458</u>	<u>60.3</u>	458	60.2	458	60.3

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Base Compiler Invocation

C benchmarks:  
icl -Qvc7.1 -Qc99

C++ benchmarks:  
icl -Qvc7.1

## Base Portability Flags

403.gcc: -DSPEC\_CPU\_WIN32  
464.h264ref: -DSPEC\_CPU\_NO\_INTTYPES -DWIN32

## Base Optimization Flags

C benchmarks:  
-fast /F512000000 shlw32m.lib -link /FORCE:MULTIPLE

C++ benchmarks:  
-fast -Qcxx\_features /F512000000 shlw32m.lib  
-link /FORCE:MULTIPLE



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

**Bull SAS**

**SPECint\_rate2006 = 46.8**

NovaScale B260 (Intel Xeon processor 5150,2.66GHz)

**SPECint\_rate\_base2006 = 45.3**

**CPU2006 license:** 20

**Test sponsor:** Bull SAS

**Tested by:** Bull SAS

**Test date:** Dec-2006

**Hardware Availability:** Dec-2006

**Software Availability:** Dec-2006

## Base Other Flags

C benchmarks:

403.gcc: -Dalloca=\_alloca

## Peak Compiler Invocation

C benchmarks:

icl -Qvc7.1 -Qc99

C++ benchmarks:

icl -Qvc7.1

## Peak Portability Flags

403.gcc: -DSPEC\_CPU\_WIN32  
464.h264ref: -DSPEC\_CPU\_NO\_INTTYPES -DWIN32

## Peak Optimization Flags

C benchmarks:

-Qprof\_gen(pass 1) -Qprof\_use(pass 2) -fast /F512000000 shlw32m.lib  
-link /FORCE:MULTIPLE

C++ benchmarks:

-Qprof\_gen(pass 1) -Qprof\_use(pass 2) -fast -Qcxx\_features  
/F512000000 shlw32m.lib -link /FORCE:MULTIPLE

## Peak Other Flags

C benchmarks:

403.gcc: -Dalloca=\_alloca

The flags file that was used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/flags.20090714.00.html>

You can also download the XML flags source by saving the following link:

<http://www.spec.org/cpu2006/flags/flags.20090714.00.xml>



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

**Bull SAS**

**SPECint\_rate2006 = 46.8**

NovaScale B260 (Intel Xeon processor 5150,2.66GHz)

**SPECint\_rate\_base2006 = 45.3**

**CPU2006 license:** 20

**Test sponsor:** Bull SAS

**Tested by:** Bull SAS

**Test date:** Dec-2006

**Hardware Availability:** Dec-2006

**Software Availability:** Dec-2006

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.0.  
Report generated on Tue Jul 22 10:19:50 2014 by SPEC CPU2006 PS/PDF formatter v6932.  
Originally published on 6 February 2007.