SPEC® CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Tyan
(Test Sponsor: Advanced Micro Devices)

Tyan Thunder n4250QE (S4985) Opteron 2220

SPECfp®_rate2006 = 48.1

SPECfp_rate_base2006 = 45.6

CPU2006 license: 49
Test sponsor: Advanced Micro Devices
Tested by: Advanced Micro Devices

Test date: Jul-2006
Hardware Availability: Feb-2007
Software Availability: Aug-2006

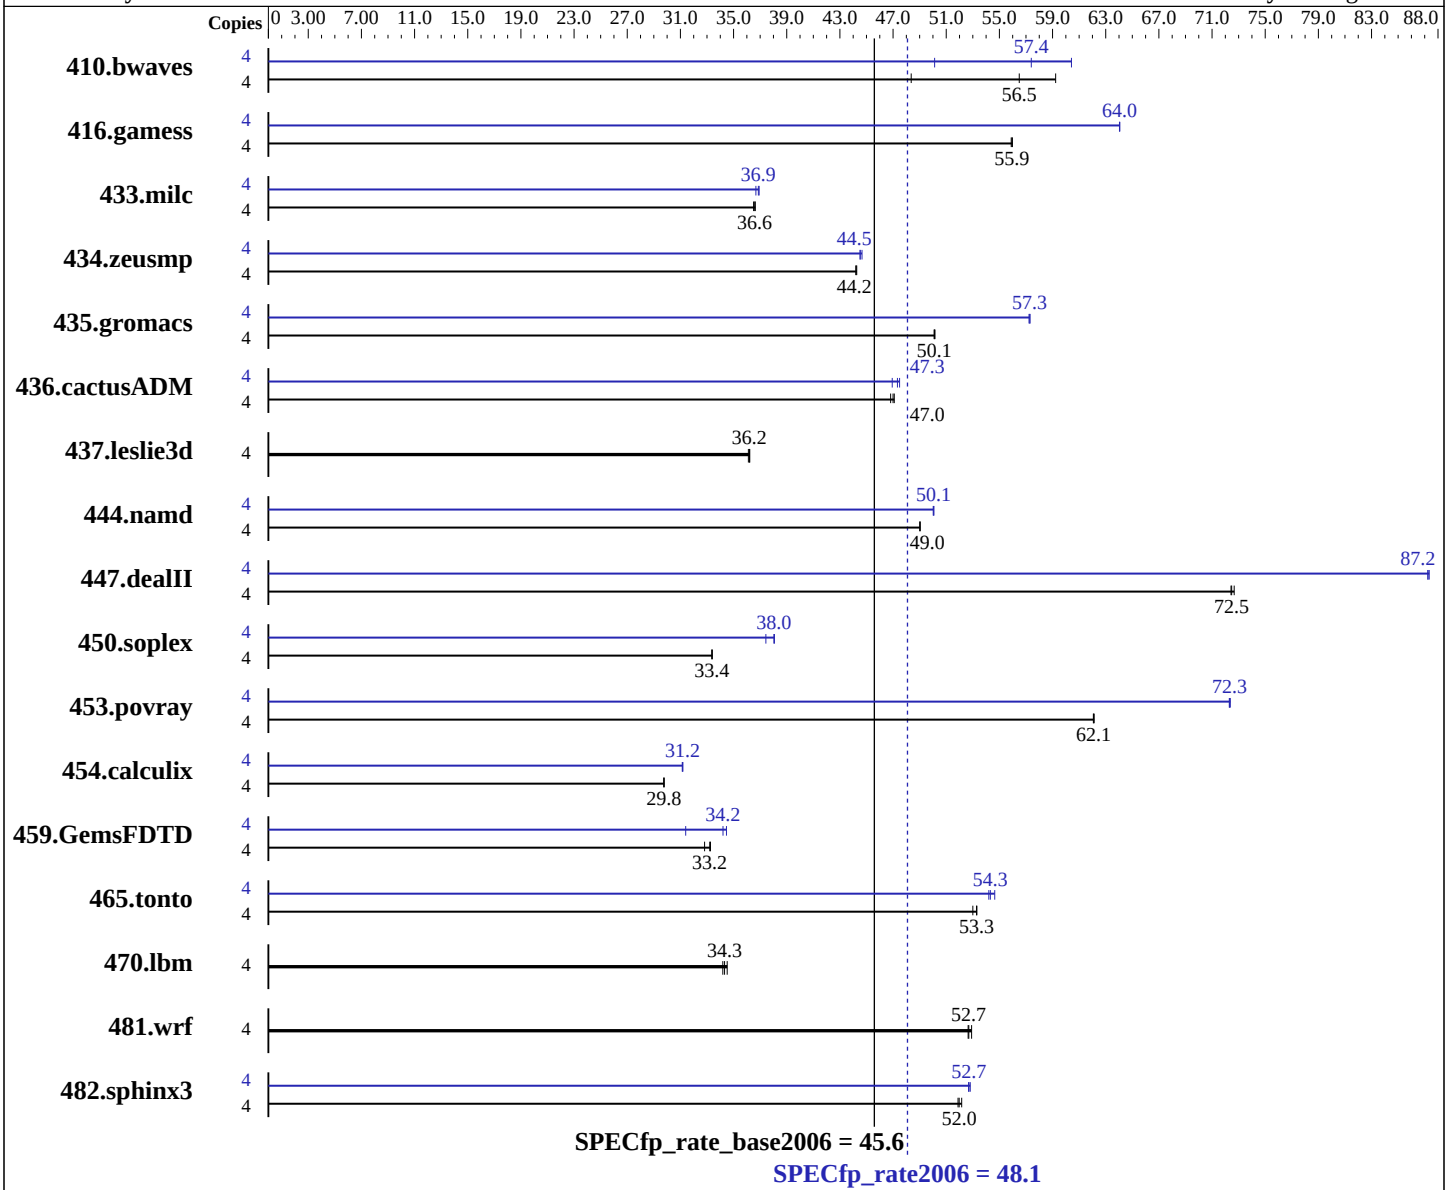

Hardware

CPU Name:	AMD Opteron 2220
CPU Characteristics:	
CPU MHz:	2800
FPU:	Integrated
CPU(s) enabled:	4 cores, 2 chips, 2 cores/chip
CPU(s) orderable:	1,2 chips
Primary Cache:	64 KB I + 64 KB D on chip per core
Secondary Cache:	1 MB I+D on chip per core

Continued on next page

Software

Operating System:	SuSE SLES9SP3 64-bit kernel
Compiler:	QLogic PathScale Compiler Suite, Release 2.5 SmartHeap 8.0 32 bit Library for Linux
Auto Parallel:	No
File System:	ext3
System State:	Multi-user, run level 3
Base Pointers:	64-bit

Continued on next page

SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Tyan
(Test Sponsor: Advanced Micro Devices)

Tyan Thunder n4250QE (S4985) Opteron 2220

SPECfp_rate2006 = 48.1

SPECfp_rate_base2006 = 45.6

CPU2006 license: 49
Test sponsor: Advanced Micro Devices
Tested by: Advanced Micro Devices

Test date: Jul-2006
Hardware Availability: Feb-2007
Software Availability: Aug-2006

L3 Cache: None
Other Cache: None
Memory: 8 GB (8x1GB, DDR2-667 CL4 ECC Reg Dual Rank)
Disk Subsystem: SATA, 74 GB
Other Hardware: None

Peak Pointers: 32/64-bit
Other Software: None

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	4	1124	48.4	918	59.2	**962**	**56.5**	4	**947**	**57.4**	1084	50.1	900	60.4
416.gamess	4	1401	55.9	**1400**	**55.9**	1399	56.0	4	1223	64.0	1223	64.1	**1223**	**64.0**
433.milc	4	1002	36.6	1006	36.5	**1004**	**36.6**	4	994	36.9	**996**	**36.9**	1001	36.7
434.zeusmp	4	823	44.2	**823**	**44.2**	822	44.3	4	**818**	**44.5**	818	44.5	815	44.7
435.gromacs	4	570	50.1	**570**	**50.1**	569	50.2	4	499	57.2	**499**	**57.3**	498	57.3
436.cactusADM	4	1015	47.1	**1017**	**47.0**	1021	46.8	4	1018	46.9	1007	47.5	**1010**	**47.3**
437.leslie3d	4	1038	36.2	1041	36.1	**1039**	**36.2**	4	1038	36.2	1041	36.1	**1039**	**36.2**
444.namd	4	654	49.0	**654**	**49.0**	654	49.0	4	**641**	**50.1**	641	50.0	641	50.1
447.dealII	4	632	72.4	**631**	**72.5**	630	72.7	4	524	87.3	525	87.2	**525**	**87.2**
450.soplex	4	**1000**	**33.4**	1000	33.4	999	33.4	4	**877**	**38.0**	891	37.4	876	38.1
453.povray	4	343	62.1	343	62.1	**343**	**62.1**	4	294	72.3	**294**	**72.3**	294	72.4
454.calculix	4	1108	29.8	**1109**	**29.8**	1109	29.8	4	1060	31.1	**1059**	**31.2**	1058	31.2
459.GemsFDTD	4	**1278**	**33.2**	1276	33.3	1293	32.8	4	1352	31.4	**1241**	**34.2**	1231	34.5
465.tonto	4	738	53.3	**739**	**53.3**	743	53.0	4	**725**	**54.3**	720	54.7	726	54.2
470.lbm	4	1592	34.5	**1601**	**34.3**	1607	34.2	4	1592	34.5	**1601**	**34.3**	1607	34.2
481.wrf	4	844	52.9	**848**	**52.7**	849	52.6	4	844	52.9	**848**	**52.7**	849	52.6
482.sphinx3	4	1495	52.2	**1500**	**52.0**	1502	51.9	4	1476	52.8	1480	52.7	**1479**	**52.7**

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

General Notes

```
taskset utility used to bind CPU(s) to processes
All memory slots filled on all used CPU sockets
The tested system can be assembled using any SSI-MEB case and
a Silverstone Zeus 650 watt ST65ZF ATX 12V Power Supply.
```

Base Compiler Invocation

C benchmarks:
`pathcc`

C++ benchmarks:
`pathCC`

Continued on next page

Base Compiler Invocation (Continued)

Fortran benchmarks:
pathf95

Benchmarks using both Fortran and C:
pathcc pathf95

Base Portability Flags

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64
436.cactusADM: -DSPEC_CPU_LP64 -fno-second-underscore
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64 -DSPEC_CPU_TABLE_WORKAROUND
450.soplex: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX -fno-second-underscore
482.sphinx3: -DSPEC_CPU_LP64

Base Optimization Flags

C benchmarks:
-Ofast

C++ benchmarks:
-Ofast

Fortran benchmarks:
-Ofast

Benchmarks using both Fortran and C:
-Ofast

Base Other Flags

C benchmarks:
-IPA:max_jobs=2

Continued on next page

Base Other Flags (Continued)

C++ benchmarks:
`-IPA:max_jobs=2`

Fortran benchmarks:
`-IPA:max_jobs=2`

Benchmarks using both Fortran and C:
`-IPA:max_jobs=2`

Peak Compiler Invocation

C benchmarks:
`pathcc`

C++ benchmarks:
`pathCC`

Fortran benchmarks:
`pathf95`

Benchmarks using both Fortran and C:
`pathcc pathf95`

Peak Portability Flags

410.bwaves: `-DSPEC_CPU_LP64`
416.gamess: `-DSPEC_CPU_LP64`
433.milc: `-DSPEC_CPU_LP64`
434.zeusmp: `-DSPEC_CPU_LP64`
435.gromacs: `-DSPEC_CPU_LP64`
436.cactusADM: `-DSPEC_CPU_LP64 -fno-second-underscore`
437.leslie3d: `-DSPEC_CPU_LP64`
444.namd: `-DSPEC_CPU_LP64`
447.dealII: `-DSPEC_CPU_TABLE_WORKAROUND`
453.povray: `-DSPEC_CPU_LP64`
454.calculix: `-DSPEC_CPU_LP64`
459.GemsFDTD: `-DSPEC_CPU_LP64`
465.tonto: `-DSPEC_CPU_LP64`
470.lbm: `-DSPEC_CPU_LP64`
481.wrf: `-DSPEC_CPU_LP64 -DSPEC_CPU_LINUX -fno-second-underscore`
482.sphinx3: `-DSPEC_CPU_LP64`

Peak Optimization Flags

C benchmarks:

433.milc: `-fb_create fbdata`(pass 1) `-fb_opt fbdata`(pass 2) `-Ofast`

470.lbm: `basepeak = yes`

482.sphinx3: `Same as 433.milc`

C++ benchmarks:

444.namd: `-fb_create fbdata`(pass 1) `-fb_opt fbdata`(pass 2) `-Ofast`

447.dealII: `-Ofast -m32 -fno-exceptions`

450.soplex: `-fb_create fbdata`(pass 1) `-fb_opt fbdata`(pass 2) `-m32 -O3 -OPT:IEEE_arith=3 -CG:load_exe=0 -CG:movnti=1 -LNO:minvariant=off -fno-exceptions`

453.povray: `-fb_create fbdata`(pass 1) `-fb_opt fbdata`(pass 2) `-Ofast -fno-fast-math`

Fortran benchmarks:

410.bwaves: `-fb_create fbdata`(pass 1) `-fb_opt fbdata`(pass 2) `-O3 -OPT:Ofast -OPT:IEEE_arith=3 -LNO:blocking=off -LNO:ignore_feedback=off`

416.gamess: `-fb_create fbdata`(pass 1) `-fb_opt fbdata`(pass 2) `-O2 -OPT:Ofast -OPT:ro=3 -OPT:unroll_size=256`

434.zeusmp: `-Ofast -CG:local_fwd_sched=on -LNO:blocking=off -LNO:interchange=off -LNO:fu=10 -LNO:full_unroll_outer=on`

437.leslie3d: `basepeak = yes`

459.GemsFDTD: `-Ofast -LNO:fission=2 -LNO:prefetch=0`

465.tonto: `-Ofast -CG:local_fwd_sched=on -IPA:plimit=525`

Benchmarks using both Fortran and C:

435.gromacs: `-O3 -OPT:rsqrt=2 -OPT:ro=3`

436.cactusADM: `-fb_create fbdata`(pass 1) `-fb_opt fbdata`(pass 2) `-O3 -LNO:prefetch_ahead=5 -LNO:ou_prod_max=10 -LNO:full_unroll=5 -ipa`

454.calculix: `-Ofast -CG:prefetch=off -LNO:simd=0 -OPT:unroll_times_max=8 -WOPT:mem_opnds=on`

Continued on next page

Peak Optimization Flags (Continued)

481.wrf: `basepeak = yes`

Peak Other Flags

C benchmarks:
`-IPA:max_jobs=2`

C++ benchmarks:
`-IPA:max_jobs=2`

Fortran benchmarks:
`-IPA:max_jobs=2`

Benchmarks using both Fortran and C:
`-IPA:max_jobs=2`

The flags file that was used to format this result can be browsed at
`http://www.spec.org/cpu2006/flags/CPU2006_flags.20090714.25.html`

You can also download the XML flags source by saving the following link:
`http://www.spec.org/cpu2006/flags/CPU2006_flags.20090714.25.xml`

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.0.
Report generated on Tue Jul 22 10:17:52 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 6 February 2007.