SPEC® CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Itautec

Servidor Itautec LX211 (Intel Xeon E5345)

SPECfp®_rate2006 = 47.5

SPECfp_rate_base2006 = 47.5

CPU2006 license: 9001
Test sponsor: Itautec
Tested by: Itautec

Test date: Feb-2007
Hardware Availability: Feb-2007
Software Availability: May-2006

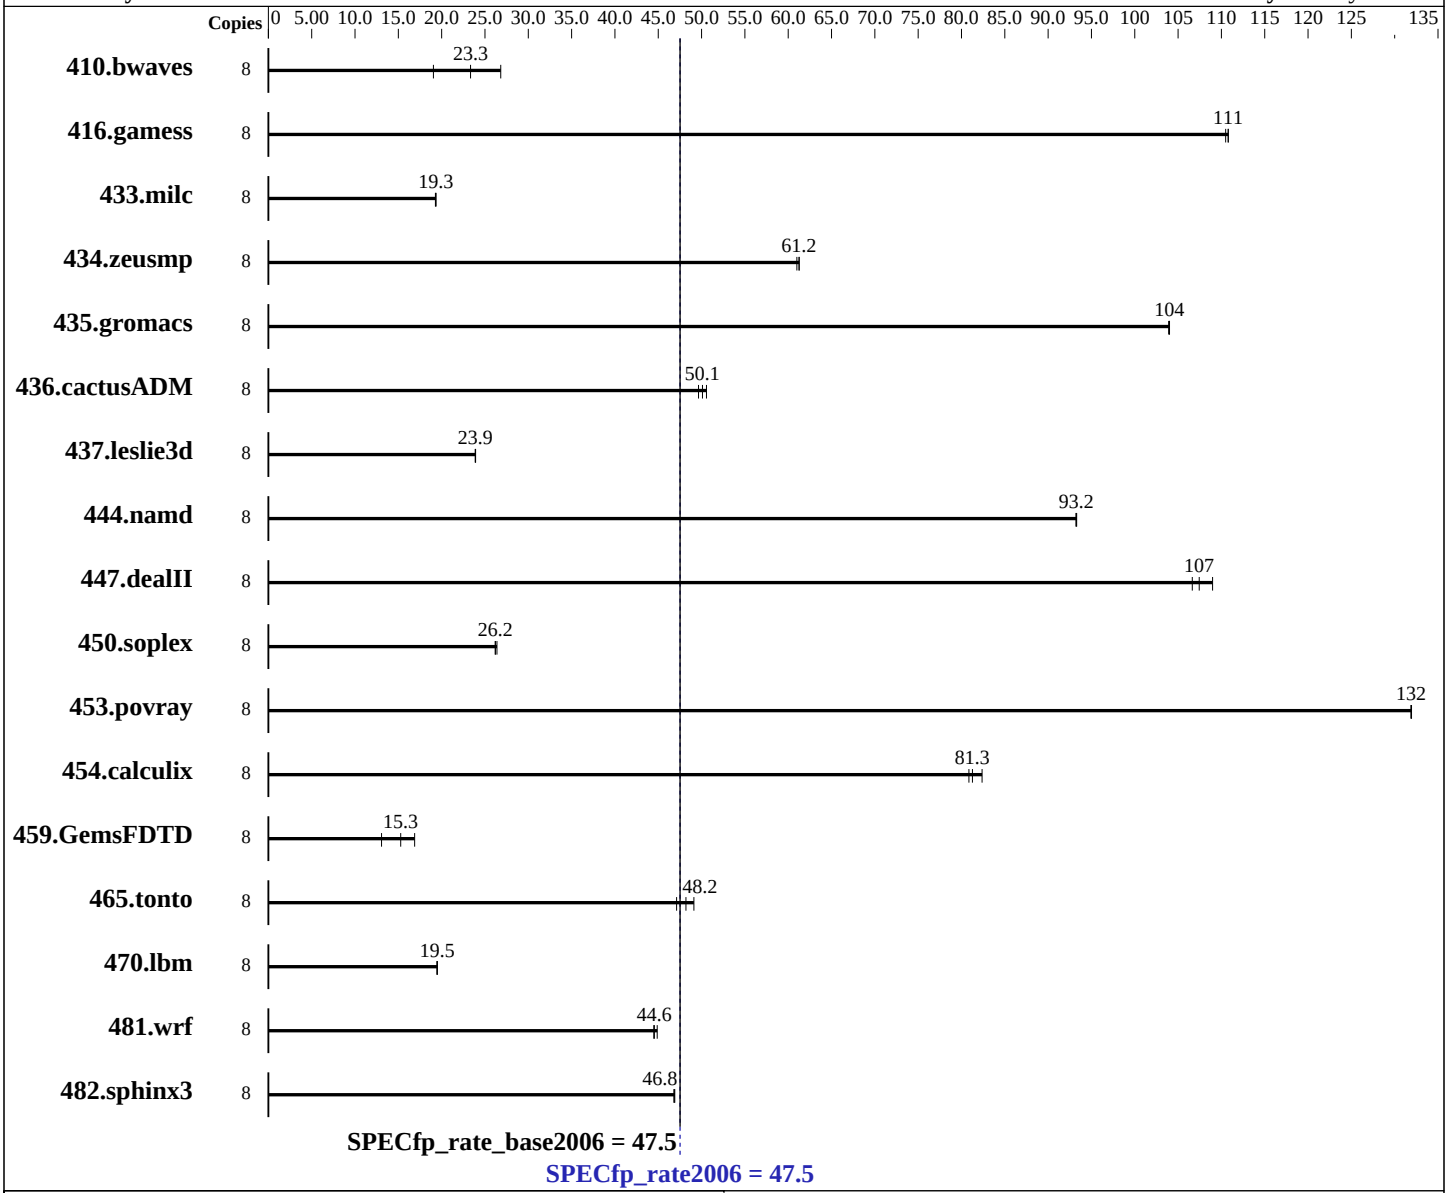

Hardware

CPU Name:	Intel Xeon E5345
CPU Characteristics:	1333MHz system bus
CPU MHz:	2330
FPU:	Integrated
CPU(s) enabled:	8 cores, 2 chips, 4 cores/chip
CPU(s) orderable:	1-2 chips
Primary Cache:	32 KB I + 32 KB D on chip per core
Secondary Cache:	8 MB I+D on chip per chip, 4 MB shared / 2 cores

Continued on next page

Software

Operating System:	Windows Server 2003 Enterprise Edition + SP1 (32-bit)
Compiler:	Intel C++ Compiler for IA32 version 9.1 Package ID W_CC_C_9.1.025 Build no 20060519Z Intel Fortran Compiler for IA32 version 9.1 Package ID W_FC_C_9.1.025 Build no 20060519Z Microsoft Visual Studio .NET 2003 7.1.3088 (for libraries)
Auto Parallel:	No
File System:	NTFS

Continued on next page

SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Itautec

Servidor Itautec LX211 (Intel Xeon E5345)

SPECfp_rate2006 = 47.5

SPECfp_rate_base2006 = 47.5

CPU2006 license: 9001
Test sponsor: Itautec
Tested by: Itautec

Test date: Feb-2007
Hardware Availability: Feb-2007
Software Availability: May-2006

L3 Cache: None
Other Cache: None
Memory: 6 GB (6x1GB DDR2-RAM PC2-5300F CAS 5-5-5)
Disk Subsystem: 120 GB SATA, 7200RPM
Other Hardware: None

System State: Default
Base Pointers: 32-bit
Peak Pointers: 32-bit
Other Software: Microquill SmartHeap Library v.8.0 for SMP

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	8	4054	26.8	5707	19.0	**4659**	**23.3**	8	4054	26.8	5707	19.0	**4659**	**23.3**
416.gamess	8	1418	110	1414	111	**1414**	**111**	8	1418	110	1414	111	**1414**	**111**
433.milc	8	3809	19.3	3797	19.3	**3799**	**19.3**	8	3809	19.3	3797	19.3	**3799**	**19.3**
434.zeusmp	8	1188	61.3	**1189**	**61.2**	1193	61.0	8	1188	61.3	**1189**	**61.2**	1193	61.0
435.gromacs	8	**549**	**104**	549	104	550	104	8	**549**	**104**	549	104	550	104
436.cactusADM	8	**1908**	**50.1**	1926	49.6	1891	50.6	8	**1908**	**50.1**	1926	49.6	1891	50.6
437.leslie3d	8	**3147**	**23.9**	3149	23.9	3144	23.9	8	**3147**	**23.9**	3149	23.9	3144	23.9
444.namd	8	688	93.3	**688**	**93.2**	688	93.2	8	688	93.3	**688**	**93.2**	688	93.2
447.dealII	8	840	109	**852**	**107**	858	107	8	840	109	**852**	**107**	858	107
450.soplex	8	**2547**	**26.2**	2529	26.4	2548	26.2	8	**2547**	**26.2**	2529	26.4	2548	26.2
453.povray	8	323	132	**323**	**132**	323	132	8	323	132	**323**	**132**	323	132
454.calculix	8	**812**	**81.3**	801	82.4	816	80.9	8	**812**	**81.3**	801	82.4	816	80.9
459.GemsFDTD	8	**5557**	**15.3**	6498	13.1	5028	16.9	8	**5557**	**15.3**	6498	13.1	5028	16.9
465.tonto	8	1671	47.1	**1633**	**48.2**	1603	49.1	8	1671	47.1	**1633**	**48.2**	1603	49.1
470.lbm	8	**5641**	**19.5**	5640	19.5	5646	19.5	8	**5641**	**19.5**	5640	19.5	5646	19.5
481.wrf	8	2009	44.5	1991	44.9	**2006**	**44.6**	8	2009	44.5	1991	44.9	**2006**	**44.6**
482.sphinx3	8	**3328**	**46.8**	3324	46.9	3331	46.8	8	**3328**	**46.8**	3324	46.9	3331	46.8

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Base Compiler Invocation

C benchmarks:
```
icl -Qvc7.1 -Qc99
```

C++ benchmarks:
```
icl -Qvc7.1
```

Fortran benchmarks:
```
ifort
```

Benchmarks using both Fortran and C:
```
icl -Qvc7.1 -Qc99 ifort
```

Base Portability Flags

436.cactusADM: `-Qlowercase /assume:underscore`
444.namd: `-TP`
447.dealII: `-DDEAL_II_MEMBER_VAR_SPECIALIZATION_BUG -DBOOST_NO_INTRINSIC_WCHAR_T`
453.povray: `-DSPEC_CPU_WINDOWS_ICL`
454.calculix: `-DSPEC_CPU_NOZMODIFIER -Qlowercase`
481.wrf: `-DSPEC_CPU_WINDOWS_ICL`

Base Optimization Flags

C benchmarks:
`-fast /F950000000 shlSMPMt.lib -link /FORCE:MULTIPLE`

C++ benchmarks:
`-fast -Qcxx_features /F950000000 shlSMPMt.lib -link /FORCE:MULTIPLE`

Fortran benchmarks:
`-fast /F950000000 -link /FORCE:MULTIPLE`

Benchmarks using both Fortran and C:
`-fast /F950000000 -link /FORCE:MULTIPLE`

Peak Optimization Flags

C benchmarks:

433.milc: `basepeak = yes`
470.lbm: `basepeak = yes`
482.sphinx3: `basepeak = yes`

C++ benchmarks:

444.namd: `basepeak = yes`
447.dealII: `basepeak = yes`
450.soplex: `basepeak = yes`
453.povray: `basepeak = yes`

Fortran benchmarks:

Continued on next page

Peak Optimization Flags (Continued)

410.bwaves: basepeak = yes

416.gamess: basepeak = yes

434.zeusmp: basepeak = yes

437.leslie3d: basepeak = yes

459.GemsFDTD: basepeak = yes

465.tonto: basepeak = yes

Benchmarks using both Fortran and C:

435.gromacs: basepeak = yes

436.cactusADM: basepeak = yes

454.calculix: basepeak = yes

481.wrf: basepeak = yes

The flags file that was used to format this result can be browsed at
http://www.spec.org/cpu2006/flags/Itautec-ic91-flags.20090714.html

You can also download the XML flags source by saving the following link:
http://www.spec.org/cpu2006/flags/Itautec-ic91-flags.20090714.xml

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.0.
Report generated on Tue Jul 22 10:47:45 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 20 March 2007.