SPEC® CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Hewlett-Packard Company

ProLiant DL380 G5
(1.86 GHz, Intel Xeon processor E5320)

SPECfp®_rate2006 = 26.0

SPECfp_rate_base2006 = 25.6

CPU2006 license: 3
Test sponsor: Hewlett-Packard Company
Tested by: Hewlett-Packard Company

Test date: Mar-2007
Hardware Availability: Nov-2006
Software Availability: Nov-2006

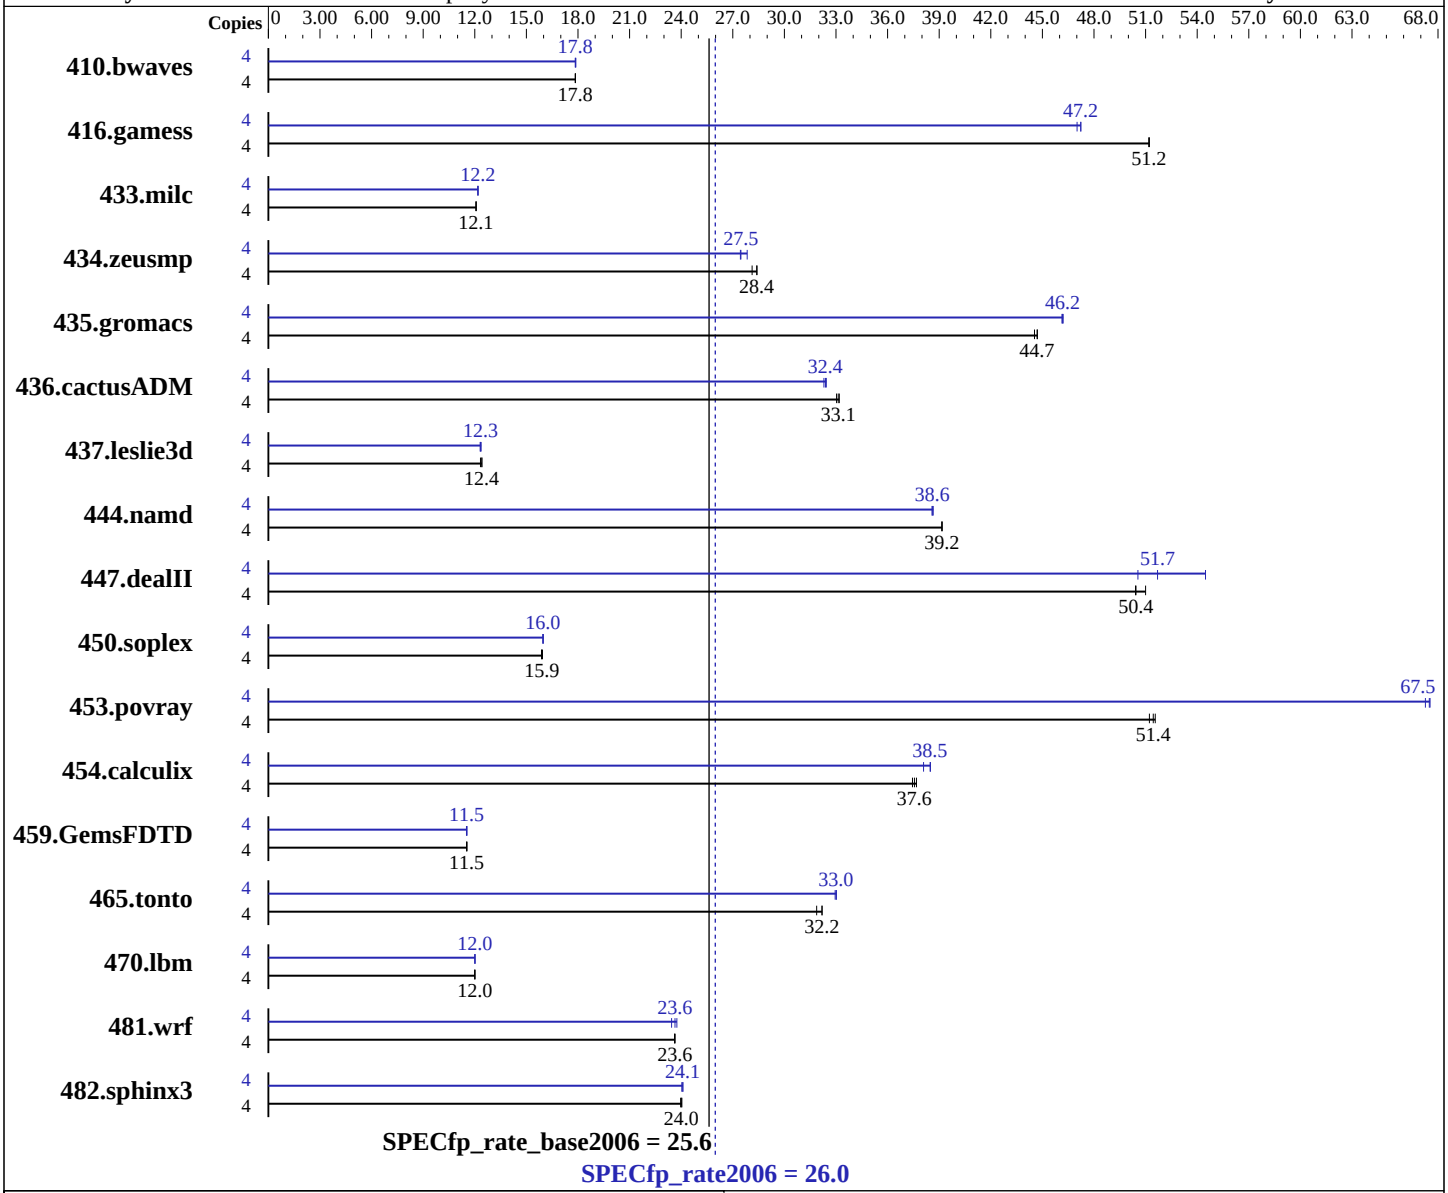

Hardware

CPU Name:	Intel Xeon E5320
CPU Characteristics:	1.86 GHz, 2x4 MB L2 shared, 1066 MHz system bus
CPU MHz:	1860
FPU:	Integrated
CPU(s) enabled:	4 cores, 1 chip, 4 cores/chip
CPU(s) orderable:	1,2 chips
Primary Cache:	32 KB I + 32 KB D on chip per core
Secondary Cache:	8 MB I+D on chip per chip, 4 MB shared / 2 cores

Continued on next page

Software

Operating System:	SuSE Linux Enterprise Server 10 (x86_64) kernel 2.6.16.21-0.8-smp
Compiler:	Intel C++ Compiler for Intel EM64T-based applications, Version 9.1 Build 20061101, Package ID: l_cc_c_9.1.045 Intel Fortran Compiler for Intel EM64T-based applications, Version 9.1 Build 20061101, Package ID: l_fc_c_9.1.040
Auto Parallel:	No

Continued on next page

SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Hewlett-Packard Company

ProLiant DL380 G5
(1.86 GHz, Intel Xeon processor E5320)

SPECfp_rate2006 = 26.0

SPECfp_rate_base2006 = 25.6

CPU2006 license: 3
Test sponsor: Hewlett-Packard Company
Tested by: Hewlett-Packard Company

Test date: Mar-2007
Hardware Availability: Nov-2006
Software Availability: Nov-2006

L3 Cache:	None	File System:	ext2
Other Cache:	None	System State:	Multi-user run level 3
Memory:	16 GB (8x2 GB PC2-5300F CL5)	Base Pointers:	64-bit
Disk Subsystem:	4x36 GB 10 K SAS	Peak Pointers:	32/64-bit
Other Hardware:	None	Other Software:	None

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	4	3046	17.8	**3046**	**17.8**	3045	17.9	4	**3046**	**17.8**	3041	17.9	3046	17.8
416.gamess	4	1530	51.2	1529	51.2	**1530**	**51.2**	4	1666	47.0	1658	47.2	**1658**	**47.2**
433.milc	4	3042	12.1	**3040**	**12.1**	3040	12.1	4	**3013**	**12.2**	3012	12.2	3016	12.2
434.zeusmp	4	1281	28.4	**1282**	**28.4**	1294	28.1	4	1326	27.4	**1325**	**27.5**	1308	27.8
435.gromacs	4	**639**	**44.7**	641	44.5	639	44.7	4	618	46.2	**619**	**46.2**	619	46.1
436.cactusADM	4	1440	33.2	**1443**	**33.1**	1447	33.0	4	**1476**	**32.4**	1480	32.3	1474	32.4
437.leslie3d	4	**3030**	**12.4**	3029	12.4	3049	12.3	4	3054	12.3	3040	12.4	**3049**	**12.3**
444.namd	4	819	39.2	**819**	**39.2**	819	39.2	4	830	38.7	**831**	**38.6**	831	38.6
447.dealII	4	897	51.0	**907**	**50.4**	908	50.4	4	**885**	**51.7**	905	50.6	840	54.5
450.soplex	4	**2098**	**15.9**	2101	15.9	2093	15.9	4	2087	16.0	2090	16.0	**2090**	**16.0**
453.povray	4	413	51.6	415	51.2	**414**	**51.4**	4	316	67.3	315	67.5	**315**	**67.5**
454.calculix	4	876	37.7	881	37.4	**879**	**37.6**	4	857	38.5	866	38.1	**858**	**38.5**
459.GemsFDTD	4	**3679**	**11.5**	3682	11.5	3678	11.5	4	3685	11.5	**3679**	**11.5**	3677	11.5
465.tonto	4	1223	32.2	**1223**	**32.2**	1235	31.9	4	1192	33.0	1195	33.0	**1192**	**33.0**
470.lbm	4	**4579**	**12.0**	4579	12.0	4578	12.0	4	4577	12.0	**4576**	**12.0**	4576	12.0
481.wrf	4	1892	23.6	**1891**	**23.6**	1890	23.6	4	**1890**	**23.6**	1906	23.4	1881	23.7
482.sphinx3	4	3243	24.0	**3247**	**24.0**	3253	24.0	4	**3236**	**24.1**	3244	24.0	3235	24.1

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Platform Notes

```
Power Regulator set to Static High Performance Mode in BIOS.
Adjacent Sector Prefetch Disabled in BIOS.
"/usr/bin/taskset" used to bind processes to CPUs.
"ulimit -s unlimited" set
```

Base Compiler Invocation

C benchmarks:
`icc`

C++ benchmarks:
`icpc`

Continued on next page

Base Compiler Invocation (Continued)

Fortran benchmarks:
ifort

Benchmarks using both Fortran and C:
icc ifort

Base Portability Flags

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
450.soplex: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64

Base Optimization Flags

C benchmarks:
-fast

C++ benchmarks:
-fast

Fortran benchmarks:
-fast

Benchmarks using both Fortran and C:
-fast

Peak Compiler Invocation

C benchmarks:
icc

Continued on next page

Peak Compiler Invocation (Continued)

C++ benchmarks:
icpc

Fortran benchmarks:
ifort

Benchmarks using both Fortran and C:
icc ifort

Peak Portability Flags

Same as Base Portability Flags

Peak Optimization Flags

C benchmarks:
-prof_gen(pass 1) -prof_use(pass 2) -fast -auto_ilp32

C++ benchmarks:
-prof_gen(pass 1) -prof_use(pass 2) -fast -auto_ilp32

Fortran benchmarks:
-prof_gen(pass 1) -prof_use(pass 2) -fast

Benchmarks using both Fortran and C:
-prof_gen(pass 1) -prof_use(pass 2) -fast -auto_ilp32

The flags file that was used to format this result can be browsed at
http://www.spec.org/cpu2006/flags/hp-ic91-flags.html

You can also download the XML flags source by saving the following link:
http://www.spec.org/cpu2006/flags/hp-ic91-flags.xml

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.0.
Report generated on Tue Jul 22 10:45:50 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 20 March 2007.