SPEC® CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Sun Microsystems
Sun SPARC Enterprise M8000

SPECfp®_rate2006 = 321

SPECfp_rate_base2006 = 302

CPU2006 license: 6
Test sponsor: Sun Microsystems
Tested by: Sun Microsystems

Test date: Apr-2007
Hardware Availability: Apr-2007
Software Availability: Jul-2007

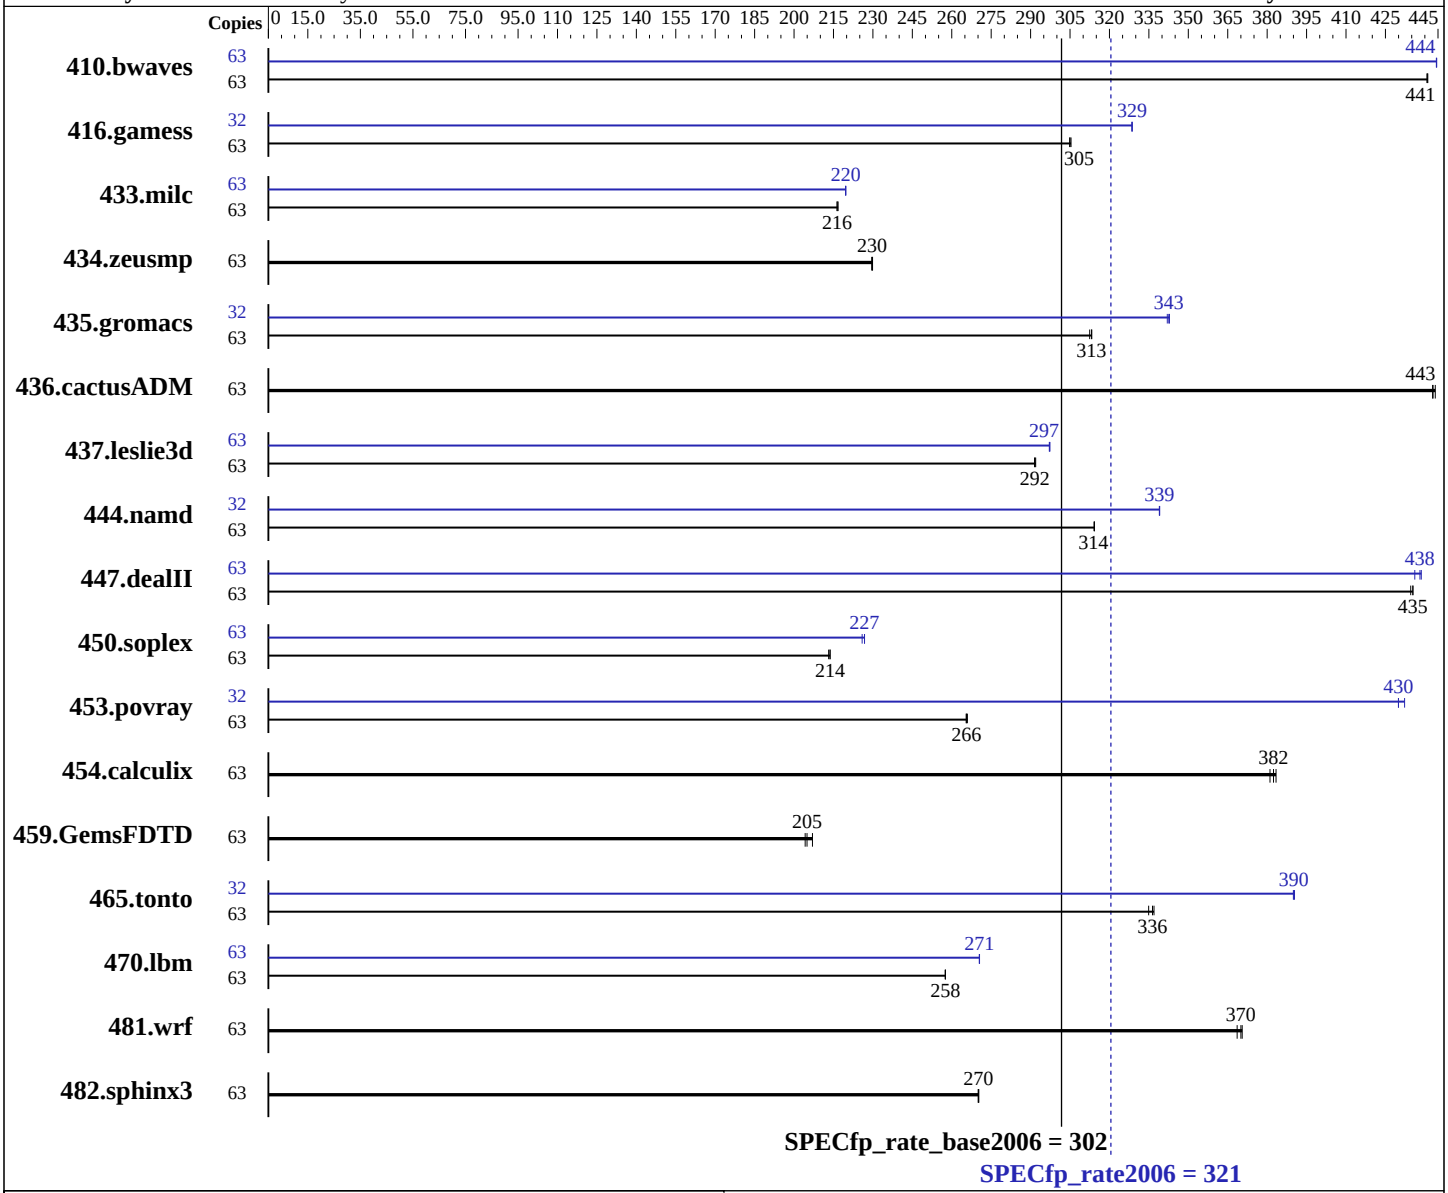

Hardware

CPU Name:	SPARC64 VI
CPU Characteristics:	
CPU MHz:	2280
FPU:	Integrated
CPU(s) enabled:	32 cores, 16 chips, 2 cores/chip, 2 threads/core
CPU(s) orderable:	1 to 4 CMUs; each CMU contains 2 or 4 chips
Primary Cache:	128 KB I + 128 KB D on chip per core
Secondary Cache:	5 MB I+D on chip per chip

Continued on next page

Software

Operating System:	Solaris 10 7/07 (build s10s_u4wos_03)
Compiler:	Sun Studio 12 (build 44.0)
Auto Parallel:	No
File System:	ufs
System State:	Default
Base Pointers:	32-bit
Peak Pointers:	32-bit
Other Software:	None

SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Sun Microsystems
Sun SPARC Enterprise M8000

SPECfp_rate2006 = 321

SPECfp_rate_base2006 = 302

CPU2006 license: 6
Test sponsor: Sun Microsystems
Tested by: Sun Microsystems

Test date: Apr-2007
Hardware Availability: Apr-2007
Software Availability: Jul-2007

L3 Cache: None
Other Cache: None
Memory: 256 GB (128 x 2 GB)
Disk Subsystem: 400 GB Solaris Volume Manager RAID0 soft partition (see notes for details)
Other Hardware: None

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	63	1942	441	1941	441	**1942**	**441**	63	**1926**	**444**	1926	445	1927	444
416.gamess	63	4046	305	**4044**	**305**	4039	305	32	**1907**	**329**	1907	329	1906	329
433.milc	63	2668	217	2673	216	**2672**	**216**	63	2633	220	**2633**	**220**	2634	220
434.zeusmp	63	2494	230	2497	230	**2495**	**230**	63	2494	230	2497	230	**2495**	**230**
435.gromacs	63	1440	312	1436	313	**1436**	**313**	32	**667**	**343**	668	342	666	343
436.cactusADM	63	1696	444	1700	443	**1699**	**443**	63	1696	444	1700	443	**1699**	**443**
437.leslie3d	63	2032	292	**2030**	**292**	2029	292	63	1993	297	1992	297	**1993**	**297**
444.namd	63	**1608**	**314**	1608	314	1608	314	32	757	339	**757**	**339**	757	339
447.dealII	63	1658	435	1655	435	**1655**	**435**	63	1643	439	1652	436	**1645**	**438**
450.soplex	63	2465	213	**2459**	**214**	2459	214	63	2326	226	2316	227	**2317**	**227**
453.povray	63	**1262**	**266**	1260	266	1262	265	32	396	430	394	432	**396**	**430**
454.calculix	63	1356	383	1364	381	**1359**	**382**	63	1356	383	1364	381	**1359**	**382**
459.GemsFDTD	63	3229	207	**3262**	**205**	3273	204	63	3229	207	**3262**	**205**	3273	204
465.tonto	63	1851	335	**1843**	**336**	1840	337	32	807	390	**807**	**390**	807	390
470.lbm	63	3361	258	**3361**	**258**	3360	258	63	**3200**	**271**	3199	271	3200	270
481.wrf	63	**1902**	**370**	1899	371	1909	369	63	**1902**	**370**	1899	371	1909	369
482.sphinx3	63	**4545**	**270**	4543	270	4547	270	63	**4545**	**270**	4543	270	4547	270

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Operating System Notes

```
Processes were bound to cores using "submit" and "pbind".
The SPEC toolset was bound to processor 0.

These shell commands request use of local 4MB pages:
      export LD_PRELOAD=madv.so.1:mpss.so.1
      export MPSSHEAP=4MB
      export MPSSSTACK=4MB
      export MADV=access_lwp
'access_lwp' means that the next light weight
process to touch the specified address range
will access it the most heavily.

ulimit -s 131072 was used to limit the space
```

Continued on next page

Operating System Notes (Continued)

```
consumed by the stack (and therefore make more
space available to the heap).

 /etc/system parameters
    autoup=300
       Causes pages older than the listed number of seconds to
       be written by fsflush.
    bufhwm=3000
       Memory byte limit for caching I/O buffers
    segmap_percent=1
       Set maximum percent memory for file system cache
    tune_t_fsflushr=3
       Controls how many seconds elapse between runs of the
       page flush daemon, fsflush.

 The "webconsole" service was turned off using
     svcadm disable webconsole
```

Platform Notes

```
Disk notes: The SPEC CPU tests use a 400 GB partition
created from 3x Sun StorageTek 6140 stripe sets.  The
partition was created in 3 steps: 1. Each 6140 stripe
set (RAID 0) is based on 8x 146 GB 15,000 RPM Seagate
ST3146954FC FC-AL disks.  2. Solaris views these as 3
logical units (LUNs) which are striped together (RAID
0) to make a 3 TB volume using Solaris Volume Manager
(SVM).  3. Lastly, SVM is then used to create one 400
GB soft partition for use by the CPU2006 output_root.

"CMU" = CPU/Memory Unit; each holds 2 or 4 CPU chips.

Memory is 8-way interleaved by filling all slots with
the same capacity DIMMs.

This result was measured using a Sun SPARC Enterprise
M8000 Server.  Note that the Fujitsu SPARC Enterprise
M8000 and Sun SPARC Enterprise M8000 are electrically
equivalent.
```

Base Compiler Invocation

C benchmarks:
cc

C++ benchmarks:
CC

Continued on next page

Base Compiler Invocation (Continued)

Fortran benchmarks:
f90

Benchmarks using both Fortran and C:
cc f90

Base Optimization Flags

C benchmarks:
-fast -fma=fused -xcache=128/64/2:5120/256/10 -xipo=2 -xpagesize=4M
-xprefetch_level=2 -xprefetch=latx:2 -xalias_level=std
-xprefetch_level=3 -xprefetch_auto_type=indirect_array_access

C++ benchmarks:
-xdepend -library=stlport4 -fast -fma=fused
-xcache=128/64/2:5120/256/10 -xipo=2 -xpagesize=4M -xprefetch_level=2
-xprefetch=latx:2 -xalias_level=compatible

Fortran benchmarks:
-fast -fma=fused -xcache=128/64/2:5120/256/10 -xipo=2 -xpagesize=4M
-xprefetch_level=2 -xprefetch=latx:2

Benchmarks using both Fortran and C:
-fast(cc) -fast(f90) -fma=fused -xcache=128/64/2:5120/256/10 -xipo=2
-xpagesize=4M -xprefetch_level=2 -xprefetch=latx:2 -xalias_level=std
-xprefetch_level=3 -xprefetch_auto_type=indirect_array_access

Base Other Flags

C benchmarks:
-xjobs=16 -V -#

C++ benchmarks:
-xjobs=16 -verbose=diags,version

Fortran benchmarks:
-xjobs=16 -V -v

Benchmarks using both Fortran and C:
-xjobs=16 -V -# -v

Peak Compiler Invocation

C benchmarks:
cc

C++ benchmarks:
CC

Fortran benchmarks:
f90

Benchmarks using both Fortran and C:
cc f90

Peak Optimization Flags

C benchmarks:

433.milc: -fast -xcache=128/64/2:5120/256/10 -xpagesize=4M -xipo=2
-xprefetch_level=2 -fsimple=1
-xprefetch_auto_type=indirect_array_access
-W2,-Ainline:rs=400 -xalias_level=std -fma=fused
-xprefetch=latx:3

470.lbm: -xprofile=collect:./feedback(pass 1)
-xprofile=use:./feedback(pass 2) -fast
-xcache=128/64/2:5120/256/10 -xpagesize=4M
-xprefetch_level=3 -xipo=2 -xrestrict -fma=fused
-Wc,-Qlp=1 -Wc,-Qlp-av=512 -Wc,-Qlp-t=1 -Wc,-Qlp-fa=1
-Wc,-Qms_pipe-prefolim=64 -xprefetch=latx:5

482.sphinx3: basepeak = yes

C++ benchmarks:

444.namd: -xdepend -library=stlport4 -fast
-xcache=128/64/2:5120/256/10 -xpagesize=4M
-xalias_level=compatible -xprefetch_level=1 -fma=fused
-xprefetch=latx:3

447.dealII: -xdepend -library=stlport4
-xprofile=collect:./feedback(pass 1)
-xprofile=use:./feedback(pass 2) -fast
-xcache=128/64/2:5120/256/10 -xpagesize=4M
-xalias_level=compatible -xipo=2 -xrestrict -fma=fused
-xprefetch=latx:4.5

450.soplex: -xdepend -library=stlport4
-xprofile=collect:./feedback(pass 1)
-xprofile=use:./feedback(pass 2) -fast
-xcache=128/64/2:5120/256/10 -xpagesize=4M

Continued on next page

Peak Optimization Flags (Continued)

450.soplex (continued):
-xalias_level=compatible -xipo=2 -xprefetch_level=2
-fsimple=0 -xrestrict
-xprefetch_auto_type=indirect_array_access
-Qoption cg -Qlp-ol=1 -Qoption cg -Qlp-it=3
-Qoption cg -Qlp-imb=1 -Qoption iropt -Apf:pdl=3

453.povray: -xdepend -library=stlport4
-xprofile=collect:./feedback(pass 1)
-xprofile=use:./feedback(pass 2) -fast
-xcache=128/64/2:5120/256/10 -xpagesize=4M
-xalias_level=compatible -xipo=2 -xrestrict -fma=fused

Fortran benchmarks:

410.bwaves: -fast -xcache=128/64/2:5120/256/10 -xpagesize=4M -xipo=2
-xprefetch_level=2 -fma=fused -xprefetch=latx:3

416.gamess: -fast -xcache=128/64/2:5120/256/10 -xpagesize=4M -xipo=2
-xprefetch_level=2 -fma=fused

434.zeusmp: basepeak = yes

437.leslie3d: -fast -xcache=128/64/2:5120/256/10 -xpagesize=4M
-xprefetch_level=3 -qoption cg -Qlp=1 -qoption cg -Qlp-fa=0
-qoption cg -Qlp-fl=1 -qoption cg -Qlp-av=448
-qoption cg -Qlp-t=4 -xprefetch=latx:3.5

459.GemsFDTD: basepeak = yes

465.tonto: -fast -xcache=128/64/2:5120/256/10 -xpagesize=4M -xipo=2
-xprefetch=latx:12 -lfast

Benchmarks using both Fortran and C:

435.gromacs: -xprofile=collect:./feedback(pass 1)
-xprofile=use:./feedback(pass 2) -fast(cc) -fast(f90)
-xcache=128/64/2:5120/256/10 -xpagesize=4M -xipo=2
-xinline= -xarch=generic -xchip=generic -fsimple=0
-fma=fused

436.cactusADM: basepeak = yes

454.calculix: basepeak = yes

481.wrf: basepeak = yes

Peak Other Flags

C benchmarks:
```
-xjobs=16 -V -#
```

C++ benchmarks:
```
-xjobs=16 -verbose=diags,version
```

Fortran benchmarks:
```
-xjobs=16 -V -v
```

Benchmarks using both Fortran and C:
```
-xjobs=16 -V -# -v
```

The flags file that was used to format this result can be browsed at
http://www.spec.org/cpu2006/flags/Sun-Solaris-Studio12.20090714.02.html

You can also download the XML flags source by saving the following link:
http://www.spec.org/cpu2006/flags/Sun-Solaris-Studio12.20090714.02.xml

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.0.1.
Report generated on Tue Jul 22 11:35:42 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 1 May 2007.