SPEC® CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Sun Microsystems
Sun SPARC Enterprise M9000

SPECfp®_rate2006 = 1170

SPECfp_rate_base2006 = 1110

CPU2006 license: 6
Test sponsor: Sun Microsystems
Tested by: Sun Microsystems

Test date: Mar-2007
Hardware Availability: Apr-2007
Software Availability: Jul-2007

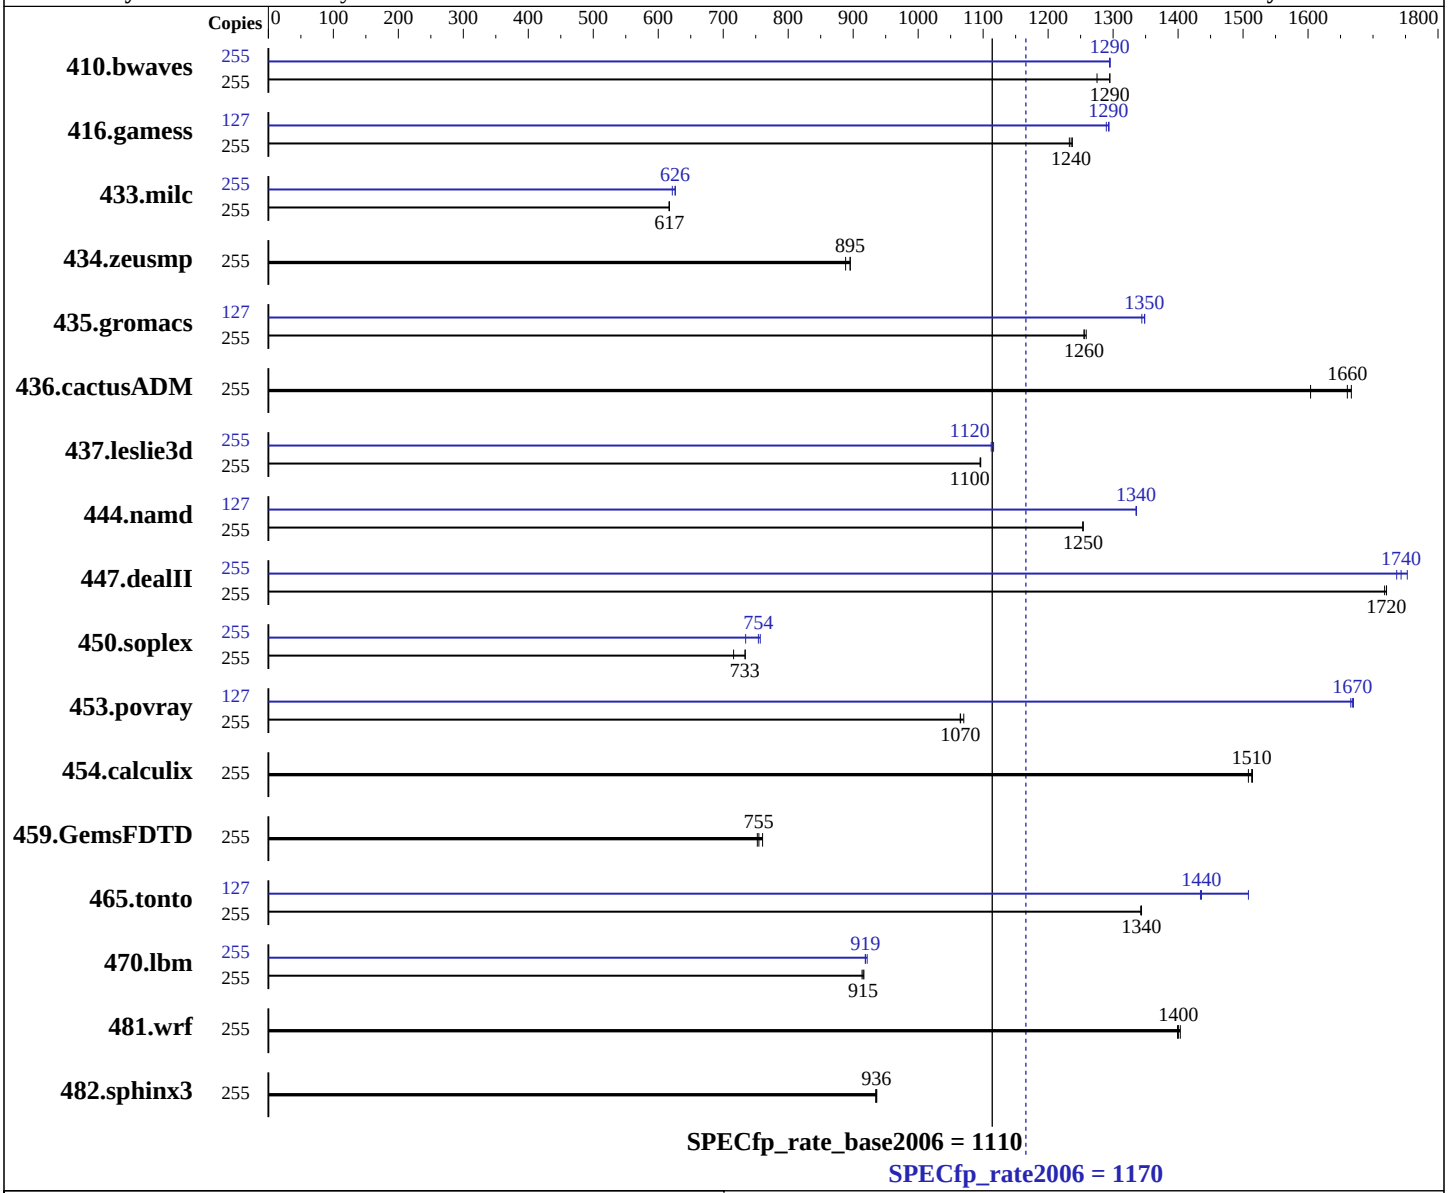

Hardware

CPU Name:	SPARC64 VI
CPU Characteristics:	
CPU MHz:	2280
FPU:	Integrated
CPU(s) enabled:	128 cores, 64 chips, 2 cores/chip, 2 threads/core
CPU(s) orderable:	1 to 16 CMUs; each CMU contains 2 or 4 chips
Primary Cache:	128 KB I + 128 KB D on chip per core
Secondary Cache:	5 MB I+D on chip per chip

Continued on next page

Software

Operating System:	Solaris 10 7/07 (build s10s_u4wos_04)
Compiler:	Sun Studio 12 (Build 44.0)
Auto Parallel:	No
File System:	ufs
System State:	Default
Base Pointers:	32-bit
Peak Pointers:	32-bit
Other Software:	None

SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Sun Microsystems
Sun SPARC Enterprise M9000

SPECfp_rate2006 = 1170

SPECfp_rate_base2006 = 1110

CPU2006 license: 6
Test sponsor: Sun Microsystems
Tested by: Sun Microsystems

Test date: Mar-2007
Hardware Availability: Apr-2007
Software Availability: Jul-2007

L3 Cache: None
Other Cache: None
Memory: 1 TB (512 x 2 GB)
Disk Subsystem: 673 GB RAID 1+0 created by Solaris Volume Manager with 20 x 73 GB 10,000 RPM Fujitsu MAY2073RC SAS
Other Hardware: None

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	255	2717	1280	**2676**	**1290**	2676	1290	255	2675	1300	**2676**	**1290**	2677	1290
416.gamess	255	**4041**	**1240**	4035	1240	4051	1230	127	1928	1290	1922	1290	**1923**	**1290**
433.milc	255	3794	617	3795	617	**3794**	**617**	255	3737	626	**3740**	**626**	3766	622
434.zeusmp	255	2612	888	**2592**	**895**	2592	895	255	2612	888	**2592**	**895**	2592	895
435.gromacs	255	1450	1260	1447	1260	**1450**	**1260**	127	**672**	**1350**	672	1350	675	1340
436.cactusADM	255	1900	1600	**1835**	**1660**	1828	1670	255	1900	1600	**1835**	**1660**	1828	1670
437.leslie3d	255	2188	1100	2186	1100	**2188**	**1100**	255	2148	1120	**2149**	**1120**	2155	1110
444.namd	255	1631	1250	**1631**	**1250**	1632	1250	127	762	1340	**763**	**1340**	763	1340
447.dealII	255	1698	1720	**1695**	**1720**	1695	1720	255	1664	1750	1680	1740	**1673**	**1740**
450.soplex	255	2970	716	**2899**	**733**	2897	734	255	2895	735	**2820**	**754**	2809	757
453.povray	255	**1273**	**1070**	1274	1060	1268	1070	127	406	1670	**405**	**1670**	405	1670
454.calculix	255	1395	1510	1389	1510	**1390**	**1510**	255	1395	1510	1389	1510	**1390**	**1510**
459.GemsFDTD	255	3596	752	3557	761	**3584**	**755**	255	3596	752	3557	761	**3584**	**755**
465.tonto	255	**1868**	**1340**	1869	1340	1867	1340	127	871	1430	829	1510	**870**	**1440**
470.lbm	255	3823	916	3835	914	**3828**	**915**	255	3802	922	**3813**	**919**	3814	919
481.wrf	255	2036	1400	**2034**	**1400**	2030	1400	255	2036	1400	**2034**	**1400**	2030	1400
482.sphinx3	255	5318	935	5309	936	**5309**	**936**	255	5318	935	5309	936	**5309**	**936**

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Operating System Notes

```
Processes were bound to cores using "submit" and "pbind".
The SPEC toolset was bound to processor 0.

These shell commands request use of local 4MB pages:
      export LD_PRELOAD=madv.so.1:mpss.so.1
      export MPSSHEAP=4MB
      export MPSSSTACK=4MB
      export MADV=access_lwp
'access_lwp' means that the next light weight
process to touch the specified address range
will access it the most heavily.
```

Continued on next page

Operating System Notes (Continued)

```
ulimit -s 131072 was used to limit the space
consumed by the stack (and therefore make more
space available to the heap).

 /etc/system parameters
    autoup=300
       Causes pages older than the listed number of seconds to
       be written by fsflush.
    bufhwm=3000
       Memory byte limit for caching I/O buffers
    segmap_percent=1
       Set maximum percent memory for file system cache
    tune_t_fsflushr=3
       Controls how many seconds elapse between runs of the
       page flush daemon, fsflush.

 The "webconsole" service was turned off using
     svcadm disable webconsole
```

Platform Notes

```
"CMU" = CPU/Memory Unit; each holds 2 or 4 CPU chips.

Memory is 8-way interleaved by filling all slots with
the same capacity DIMMs.

This result was measured using a Sun SPARC Enterprise
M9000 Server.  Note that the Fujitsu SPARC Enterprise
M9000 and Sun SPARC Enterprise M9000 are electrically
equivalent.
```

Base Compiler Invocation

C benchmarks:
```
cc
```

C++ benchmarks:
```
CC
```

Fortran benchmarks:
```
f90
```

Benchmarks using both Fortran and C:
```
cc f90
```

Base Optimization Flags

C benchmarks:
```
-fast -fma=fused -xcache=128/64/2:5120/256/10 -xipo=2 -xpagesize=4M
-xprefetch_level=2 -xprefetch=latx:2 -xalias_level=std
-xprefetch_level=3 -xprefetch_auto_type=indirect_array_access
```

C++ benchmarks:
```
-xdepend -library=stlport4 -fast -fma=fused
-xcache=128/64/2:5120/256/10 -xipo=2 -xpagesize=4M -xprefetch_level=2
-xprefetch=latx:2 -xalias_level=compatible
```

Fortran benchmarks:
```
-fast -fma=fused -xcache=128/64/2:5120/256/10 -xipo=2 -xpagesize=4M
-xprefetch_level=2 -xprefetch=latx:2
```

Benchmarks using both Fortran and C:
```
-fast(cc) -fast(f90) -fma=fused -xcache=128/64/2:5120/256/10 -xipo=2
-xpagesize=4M -xprefetch_level=2 -xprefetch=latx:2 -xalias_level=std
-xprefetch_level=3 -xprefetch_auto_type=indirect_array_access
```

Base Other Flags

C benchmarks:
```
-xjobs=24 -V -#
```

C++ benchmarks:
```
-xjobs=24 -verbose=diags,version
```

Fortran benchmarks:
```
-xjobs=24 -V -v
```

Benchmarks using both Fortran and C:
```
-xjobs=24 -V -# -v
```

Peak Compiler Invocation

C benchmarks:
```
cc
```

C++ benchmarks:
```
CC
```

Fortran benchmarks:
```
f90
```

Benchmarks using both Fortran and C:
```
cc f90
```

Peak Optimization Flags

C benchmarks:

433.milc: -fast -xcache=128/64/2:5120/256/10 -xpagesize=4M -xipo=2
-xprefetch_level=2 -fsimple=1
-xprefetch_auto_type=indirect_array_access
-W2,-Ainline:rs=400 -xalias_level=std -fma=fused
-xprefetch=latx:3

470.lbm: -xprofile=collect:./feedback(pass 1)
-xprofile=use:./feedback(pass 2) -fast
-xcache=128/64/2:5120/256/10 -xpagesize=4M
-xprefetch_level=3 -xipo=2 -xrestrict -fma=fused
-Wc,-Qlp=1 -Wc,-Qlp-av=512 -Wc,-Qlp-t=1 -Wc,-Qlp-fa=1
-Wc,-Qms_pipe-prefolim=64 -xprefetch=latx:5

482.sphinx3: basepeak = yes

C++ benchmarks:

444.namd: -xdepend -library=stlport4 -fast
-xcache=128/64/2:5120/256/10 -xpagesize=4M
-xalias_level=compatible -xprefetch_level=1 -fma=fused
-xprefetch=latx:3

447.dealII: -xdepend -library=stlport4
-xprofile=collect:./feedback(pass 1)
-xprofile=use:./feedback(pass 2) -fast
-xcache=128/64/2:5120/256/10 -xpagesize=4M
-xalias_level=compatible -xipo=2 -xrestrict -fma=fused
-xprefetch=latx:4.5

450.soplex: -xdepend -library=stlport4
-xprofile=collect:./feedback(pass 1)
-xprofile=use:./feedback(pass 2) -fast
-xcache=128/64/2:5120/256/10 -xpagesize=4M
-xalias_level=compatible -xipo=2 -xprefetch_level=2
-fsimple=0 -xrestrict
-xprefetch_auto_type=indirect_array_access
-Qoption cg -Qlp-ol=1 -Qoption cg -Qlp-it=3
-Qoption cg -Qlp-imb=1 -Qoption iropt -Apf:pdl=3

453.povray: -xdepend -library=stlport4
-xprofile=collect:./feedback(pass 1)
-xprofile=use:./feedback(pass 2) -fast
-xcache=128/64/2:5120/256/10 -xpagesize=4M
-xalias_level=compatible -xipo=2 -xrestrict -fma=fused

Fortran benchmarks:

Continued on next page

Peak Optimization Flags (Continued)

410.bwaves: `-fast -xcache=128/64/2:5120/256/10 -xpagesize=4M -xipo=2 -xprefetch_level=2 -fma=fused -xprefetch=latx:3`

416.gamess: `-fast -xcache=128/64/2:5120/256/10 -xpagesize=4M -xipo=2 -xprefetch_level=2 -fma=fused`

434.zeusmp: `basepeak = yes`

437.leslie3d: `-fast -xcache=128/64/2:5120/256/10 -xpagesize=4M -xprefetch_level=3 -qoption cg -Qlp=1 -qoption cg -Qlp-fa=0 -qoption cg -Qlp-fl=1 -qoption cg -Qlp-av=448 -qoption cg -Qlp-t=4 -xprefetch=latx:3.5`

459.GemsFDTD: `basepeak = yes`

465.tonto: `-fast -xcache=128/64/2:5120/256/10 -xpagesize=4M -xipo=2 -xprefetch=latx:12 -lfast`

Benchmarks using both Fortran and C:

435.gromacs: `-xprofile=collect:./feedback`(pass 1) `-xprofile=use:./feedback`(pass 2) `-fast`(cc) `-fast`(f90) `-xcache=128/64/2:5120/256/10 -xpagesize=4M -xipo=2 -xinline= -xarch=generic -xchip=generic -fsimple=0 -fma=fused`

436.cactusADM: `basepeak = yes`

454.calculix: `basepeak = yes`

481.wrf: `basepeak = yes`

Peak Other Flags

C benchmarks:
`-xjobs=24 -V -#`

C++ benchmarks:
`-xjobs=24 -verbose=diags,version`

Fortran benchmarks:
`-xjobs=24 -V -v`

Benchmarks using both Fortran and C:
`-xjobs=24 -V -# -v`

The flags file that was used to format this result can be browsed at
http://www.spec.org/cpu2006/flags/Sun-Solaris-Studio12.20090714.02.html

You can also download the XML flags source by saving the following link:
http://www.spec.org/cpu2006/flags/Sun-Solaris-Studio12.20090714.02.xml

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.0.1.
Report generated on Tue Jul 22 11:32:26 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 1 May 2007.