SPEC® CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Sun Microsystems
Sun Fire X4200 M2

SPECfp®_rate2006 = 35.3

SPECfp_rate_base2006 = 33.5

CPU2006 license: 6
Test sponsor: Sun Microsystems
Tested by: Sun Microsystems

Test date: Apr-2007
Hardware Availability: Oct-2006
Software Availability: Aug-2006

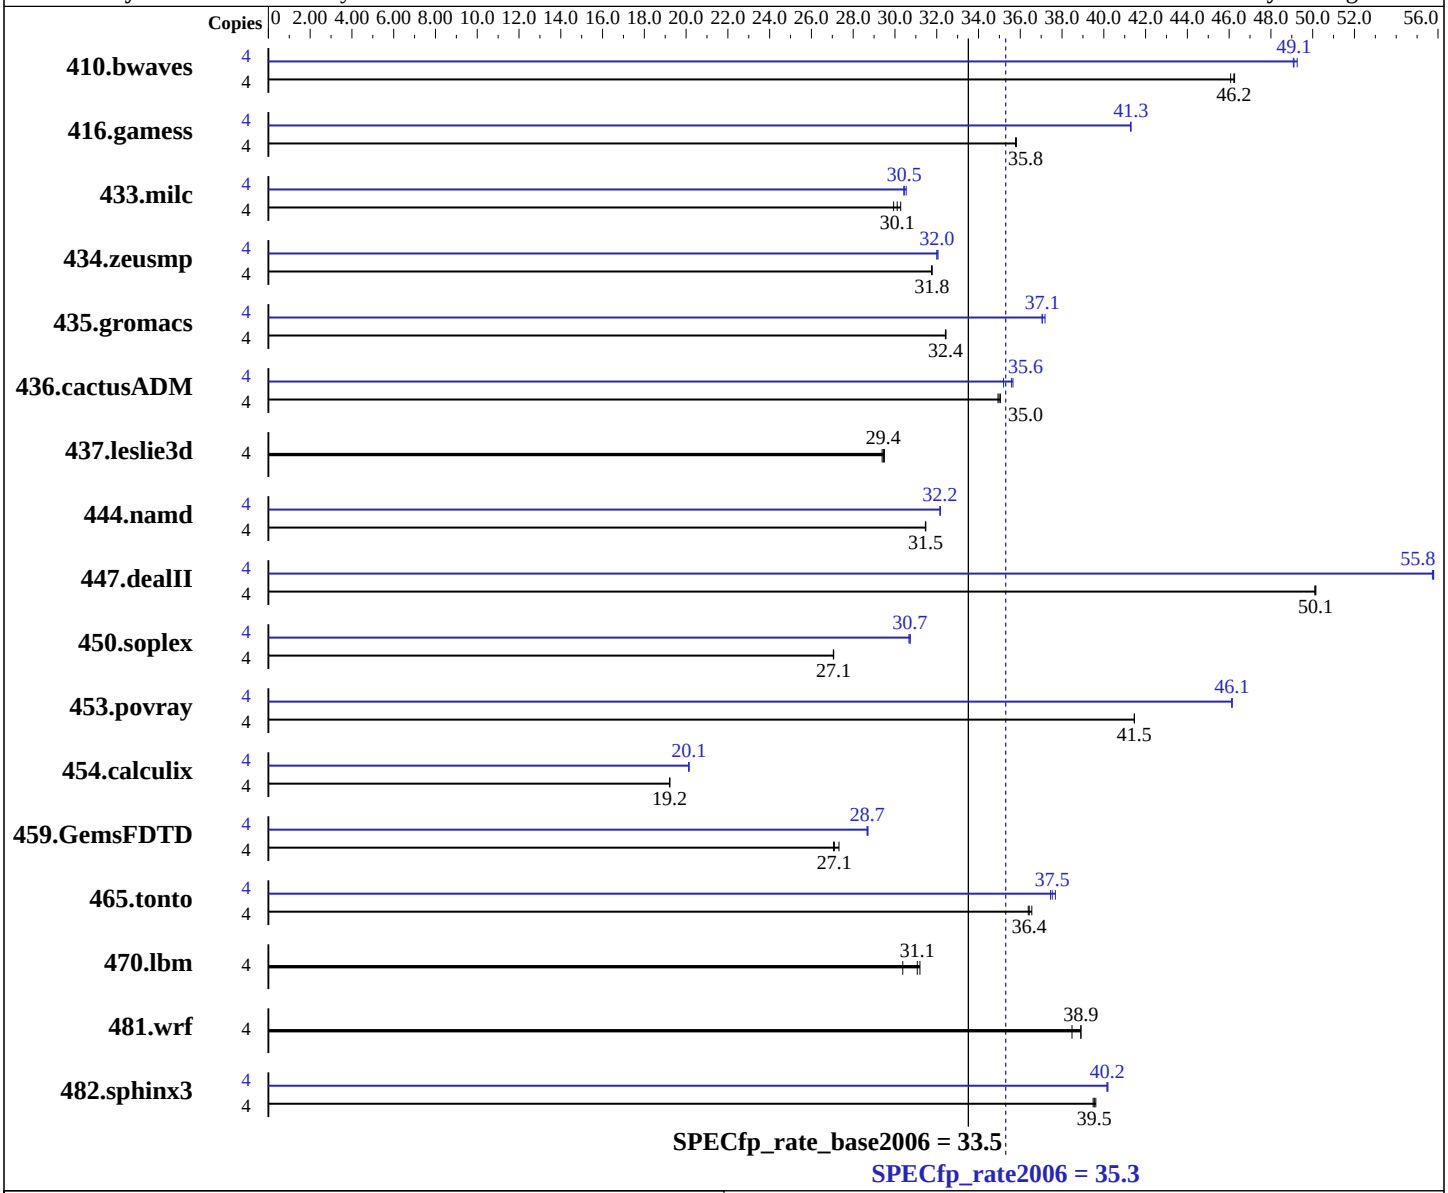

Hardware

CPU Name:	AMD Opteron 2210
CPU Characteristics:	
CPU MHz:	1800
FPU:	Integrated
CPU(s) enabled:	4 cores, 2 chips, 2 cores/chip
CPU(s) orderable:	1,2 chips
Primary Cache:	64 KB I + 64 KB D on chip per core
Secondary Cache:	1 MB I+D on chip per core

Continued on next page

Software

Operating System:	RedHat Enterprise Linux AS release 4 Update 5
Compiler:	QLogic PathScale Compiler Suite, Release 2.5
Auto Parallel:	No
File System:	ext3
System State:	Multi-user, run level 3
Base Pointers:	64-bit

Continued on next page

SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Sun Microsystems
Sun Fire X4200 M2

SPECfp_rate2006 = 35.3

SPECfp_rate_base2006 = 33.5

CPU2006 license: 6
Test sponsor: Sun Microsystems
Tested by: Sun Microsystems

Test date: Apr-2007
Hardware Availability: Oct-2006
Software Availability: Aug-2006

L3 Cache: None
Other Cache: None
Memory: 16 GB (8x2GB, DDR2-667 CL5 ECC Reg Dual Rank)
Disk Subsystem: SAS, 72 GB,10K RPM
Other Hardware: None

Peak Pointers: 32/64-bit
Other Software: None

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	4	1175	46.3	**1176**	**46.2**	1180	46.1	4	1108	49.1	1104	49.3	**1107**	**49.1**
416.gamess	4	**2187**	**35.8**	2189	35.8	2187	35.8	4	**1897**	**41.3**	1897	41.3	1897	41.3
433.milc	4	1227	29.9	**1220**	**30.1**	1213	30.3	4	1202	30.5	**1206**	**30.5**	1207	30.4
434.zeusmp	4	**1146**	**31.8**	1146	31.8	1147	31.7	4	1137	32.0	**1137**	**32.0**	1135	32.1
435.gromacs	4	**881**	**32.4**	880	32.4	881	32.4	4	771	37.0	**771**	**37.1**	768	37.2
436.cactusADM	4	1368	34.9	1364	35.0	**1366**	**35.0**	4	**1344**	**35.6**	1341	35.7	1358	35.2
437.leslie3d	4	1280	29.4	1275	29.5	**1277**	**29.4**	4	1280	29.4	1275	29.5	**1277**	**29.4**
444.namd	4	1020	31.5	**1019**	**31.5**	1019	31.5	4	998	32.2	997	32.2	**997**	**32.2**
447.dealII	4	913	50.1	**913**	**50.1**	913	50.1	4	820	55.8	821	55.7	**820**	**55.8**
450.soplex	4	**1233**	**27.1**	1233	27.1	1233	27.0	4	1085	30.7	**1086**	**30.7**	1088	30.7
453.povray	4	513	41.5	513	41.5	**513**	**41.5**	4	461	46.1	461	46.1	**461**	**46.1**
454.calculix	4	1718	19.2	**1718**	**19.2**	1716	19.2	4	**1639**	**20.1**	1639	20.1	1639	20.1
459.GemsFDTD	4	1568	27.1	1553	27.3	**1566**	**27.1**	4	**1480**	**28.7**	1478	28.7	1480	28.7
465.tonto	4	1077	36.6	1082	36.4	**1080**	**36.4**	4	1045	37.7	1051	37.4	**1049**	**37.5**
470.lbm	4	1809	30.4	**1769**	**31.1**	1762	31.2	4	1809	30.4	**1769**	**31.1**	1762	31.2
481.wrf	4	1148	38.9	**1149**	**38.9**	1161	38.5	4	1148	38.9	**1149**	**38.9**	1161	38.5
482.sphinx3	4	**1971**	**39.5**	1974	39.5	1968	39.6	4	1942	40.2	**1941**	**40.2**	1939	40.2

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

General Notes

```
taskset utility used to bind CPU(s) to processes
Default BIOS settings were used.

This result was measured on the Sun Fire X4100 M2
Sun Fire X4100 M2 and Sun Fire X4200 M2 are electronically equivalent.
```

Base Compiler Invocation

C benchmarks:
pathcc

Continued on next page

Base Compiler Invocation (Continued)

C++ benchmarks:
pathCC

Fortran benchmarks:
pathf95

Benchmarks using both Fortran and C:
pathcc pathf95

Base Portability Flags

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64
436.cactusADM: -DSPEC_CPU_LP64 -fno-second-underscore
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64 -DSPEC_CPU_TABLE_WORKAROUND
450.soplex: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX -fno-second-underscore
482.sphinx3: -DSPEC_CPU_LP64

Base Optimization Flags

C benchmarks:
-Ofast

C++ benchmarks:
-Ofast

Fortran benchmarks:
-Ofast

Benchmarks using both Fortran and C:
-Ofast

Base Other Flags

C benchmarks:
`-IPA:max_jobs=4`

C++ benchmarks:
`-IPA:max_jobs=4`

Fortran benchmarks:
`-IPA:max_jobs=4`

Benchmarks using both Fortran and C:
`-IPA:max_jobs=4`

Peak Compiler Invocation

C benchmarks:
`pathcc`

C++ benchmarks:
`pathCC`

Fortran benchmarks:
`pathf95`

Benchmarks using both Fortran and C:
`pathcc pathf95`

Peak Portability Flags

410.bwaves: `-DSPEC_CPU_LP64`
416.gamess: `-DSPEC_CPU_LP64`
433.milc: `-DSPEC_CPU_LP64`
434.zeusmp: `-DSPEC_CPU_LP64`
435.gromacs: `-DSPEC_CPU_LP64`
436.cactusADM: `-DSPEC_CPU_LP64 -fno-second-underscore`
437.leslie3d: `-DSPEC_CPU_LP64`
444.namd: `-DSPEC_CPU_LP64`
447.dealII: `-DSPEC_CPU_TABLE_WORKAROUND`
453.povray: `-DSPEC_CPU_LP64`
454.calculix: `-DSPEC_CPU_LP64`
459.GemsFDTD: `-DSPEC_CPU_LP64`
465.tonto: `-DSPEC_CPU_LP64`
470.lbm: `-DSPEC_CPU_LP64`
481.wrf: `-DSPEC_CPU_LP64 -DSPEC_CPU_LINUX -fno-second-underscore`
482.sphinx3: `-DSPEC_CPU_LP64`

Peak Optimization Flags

C benchmarks:

433.milc: `-fb_create fbdata`(pass 1) `-fb_opt fbdata`(pass 2) `-Ofast`

470.lbm: `basepeak = yes`

482.sphinx3: `Same as 433.milc`

C++ benchmarks:

444.namd: `-fb_create fbdata`(pass 1) `-fb_opt fbdata`(pass 2) `-Ofast`

447.dealII: `-Ofast -m32 -fno-exceptions`

450.soplex: `-fb_create fbdata`(pass 1) `-fb_opt fbdata`(pass 2) `-m32 -O3 -OPT:IEEE_arith=3 -CG:load_exe=0 -CG:movnti=1 -LNO:minvariant=off -fno-exceptions`

453.povray: `-fb_create fbdata`(pass 1) `-fb_opt fbdata`(pass 2) `-Ofast -fno-fast-math`

Fortran benchmarks:

410.bwaves: `-fb_create fbdata`(pass 1) `-fb_opt fbdata`(pass 2) `-O3 -OPT:Ofast -OPT:IEEE_arith=3 -LNO:blocking=off -LNO:ignore_feedback=off`

416.gamess: `-fb_create fbdata`(pass 1) `-fb_opt fbdata`(pass 2) `-O2 -OPT:Ofast -OPT:ro=3 -OPT:unroll_size=256`

434.zeusmp: `-Ofast -CG:local_fwd_sched=on -LNO:blocking=off -LNO:interchange=off -LNO:fu=10 -LNO:full_unroll_outer=on`

437.leslie3d: `basepeak = yes`

459.GemsFDTD: `-Ofast -LNO:fission=2 -LNO:prefetch=0`

465.tonto: `-Ofast -CG:local_fwd_sched=on -IPA:plimit=525`

Benchmarks using both Fortran and C:

435.gromacs: `-O3 -OPT:rsqrt=2 -OPT:ro=3`

436.cactusADM: `-fb_create fbdata`(pass 1) `-fb_opt fbdata`(pass 2) `-O3 -LNO:prefetch_ahead=5 -LNO:ou_prod_max=10 -LNO:full_unroll=5 -ipa`

454.calculix: `-Ofast -CG:prefetch=off -LNO:simd=0 -OPT:unroll_times_max=8 -WOPT:mem_opnds=on`

Continued on next page

Peak Optimization Flags (Continued)

481.wrf: `basepeak = yes`

Peak Other Flags

C benchmarks:
`-IPA:max_jobs=4`

C++ benchmarks:
`-IPA:max_jobs=4`

Fortran benchmarks:
`-IPA:max_jobs=4`

Benchmarks using both Fortran and C:
`-IPA:max_jobs=4`

The flags file that was used to format this result can be browsed at
`http://www.spec.org/cpu2006/flags/CPU2006_flags.20090714.30.html`

You can also download the XML flags source by saving the following link:
`http://www.spec.org/cpu2006/flags/CPU2006_flags.20090714.30.xml`

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.0.
Report generated on Tue Sep 13 11:21:04 2016 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 15 May 2007.