SPEC® CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

IBM System p 570 (4.7 GHz, 4 core)

SPECfp®_rate2006 = 115

SPECfp_rate_base2006 = 102

CPU2006 license: 11
Test sponsor: IBM Corporation
Tested by: IBM Corporation

Test date: May-2007
Hardware Availability: Jun-2007
Software Availability: Jun-2007

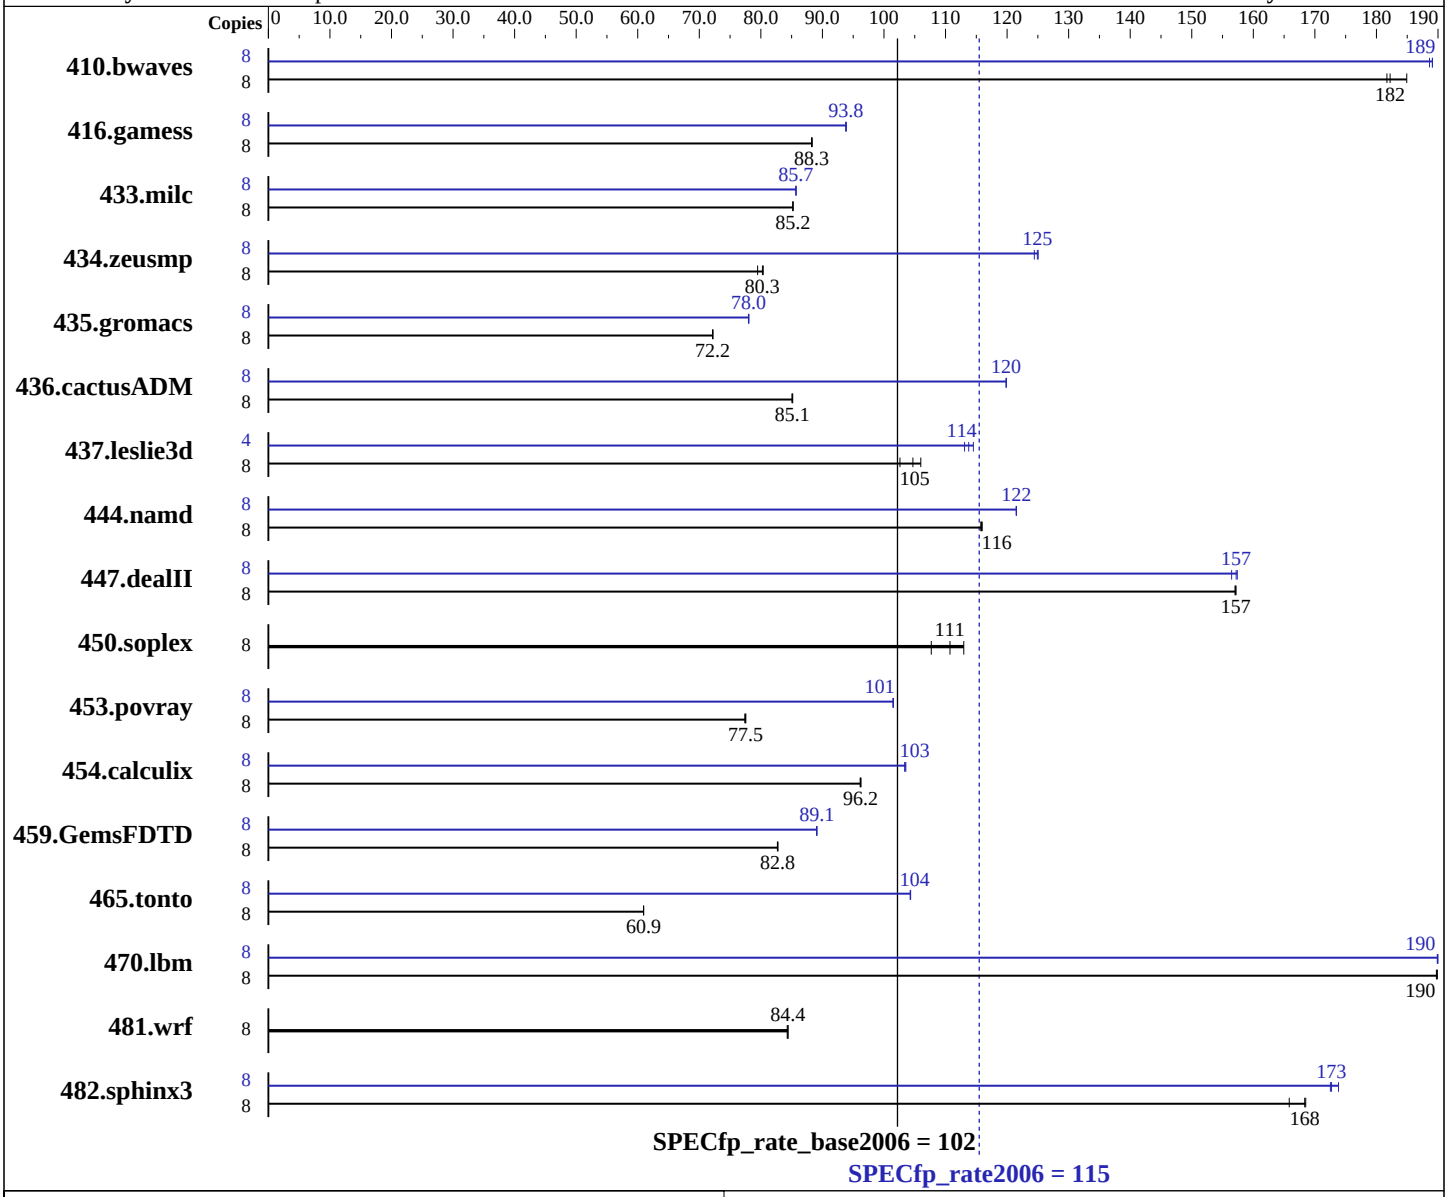

Hardware

CPU Name:	POWER6
CPU Characteristics:	
CPU MHz:	4700
FPU:	Integrated
CPU(s) enabled:	4 cores, 2 chips, 2 cores/chip, 2 threads/core
CPU(s) orderable:	2,4,8,12,16 cores
Primary Cache:	64 KB I + 64 KB D on chip per core
Secondary Cache:	4 MB I+D on chip per core

Continued on next page

Software

Operating System:	IBM AIX 5L V5.3
Compiler:	XL C/C++ Enterprise Edition Version 9.0 for AIX XL Fortran Enterprise Edition Version 11.1 for AIX
Auto Parallel:	No
File System:	AIX/JFS2
System State:	Multi-user
Base Pointers:	32-bit
Peak Pointers:	32/64-bit
Other Software:	--

SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

IBM System p 570 (4.7 GHz, 4 core)

SPECfp_rate2006 = 115

SPECfp_rate_base2006 = 102

CPU2006 license: 11
Test sponsor: IBM Corporation
Tested by: IBM Corporation

Test date: May-2007
Hardware Availability: Jun-2007
Software Availability: Jun-2007

L3 Cache: 32 MB I+D off chip per chip
Other Cache: None
Memory: 32 GB (16x2 GB) DDR2 667 MHz
Disk Subsystem: 1x73 GB 1x146 GB SAS 15K RPM
Other Hardware: None

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	8	588	185	**597**	**182**	598	182	8	**575**	**189**	576	189	575	189
416.gamess	8	1773	88.3	**1774**	**88.3**	1775	88.2	8	**1670**	**93.8**	1668	93.9	1670	93.8
433.milc	8	862	85.2	**862**	**85.2**	862	85.2	8	857	85.7	**857**	**85.7**	857	85.7
434.zeusmp	8	906	80.4	**907**	**80.3**	916	79.5	8	585	124	582	125	**583**	**125**
435.gromacs	8	**791**	**72.2**	791	72.2	791	72.2	8	**732**	**78.0**	732	78.1	732	78.0
436.cactusADM	8	1122	85.2	**1124**	**85.1**	1124	85.1	8	**798**	**120**	798	120	798	120
437.leslie3d	8	733	103	**718**	**105**	710	106	4	328	115	**331**	**114**	332	113
444.namd	8	553	116	554	116	**554**	**116**	8	**528**	**122**	528	121	528	122
447.dealII	8	583	157	582	157	**582**	**157**	8	585	156	**582**	**157**	581	157
450.soplex	8	591	113	**603**	**111**	620	108	8	591	113	**603**	**111**	620	108
453.povray	8	**549**	**77.5**	549	77.6	550	77.4	8	**419**	**101**	419	101	419	102
454.calculix	8	687	96.1	686	96.3	**686**	**96.2**	8	639	103	637	104	**638**	**103**
459.GemsFDTD	8	**1026**	**82.8**	1026	82.8	1027	82.7	8	953	89.1	**953**	**89.1**	953	89.1
465.tonto	8	1291	61.0	**1292**	**60.9**	1292	60.9	8	755	104	754	104	**755**	**104**
470.lbm	8	579	190	**579**	**190**	579	190	8	579	190	579	190	**579**	**190**
481.wrf	8	1060	84.3	**1059**	**84.4**	1059	84.4	8	1060	84.3	**1059**	**84.4**	1059	84.4
482.sphinx3	8	940	166	**926**	**168**	925	169	8	904	173	897	174	**903**	**173**

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

General Notes

```
AIX 5L V5.3 updated with the 5300-06 Technology Level.
See flags file for details on following settings.
all ulimits set to unlimited
Envionment variables set before executing benchmarks:
  MALLOCOPTIONS=pool
  MEMORY_AFFINITY=MCM
  XLFRTEOPTS=intrinthds=1
System set to "Enhanced" mode when defining partition on HMC
1536 pages of size 16M defined on systems with vmo command
fdpr binary optimization tool used for peak versions of
  410.bwaves 434.zeusmp 453.povray 470.lbm 482.sphinx3
submit used to bind benchmark to a processor using "bindprocessor"
The "IBM System p 570" and "IBM System i 570" are electronically equivalent.
The results have been measured on the "IBM System p 570" model.
```

Base Compiler Invocation

C benchmarks:
```
/usr/vac/bin/xlc -qlanglvl=extc99
```

C++ benchmarks:
```
/usr/vacpp/bin/xlC
```

Fortran benchmarks:
```
/usr/bin/xlf95
```

Benchmarks using both Fortran and C:
```
/usr/vac/bin/xlc -qlanglvl=extc99 /usr/bin/xlf95
```

Base Portability Flags

410.bwaves: `-qfixed`
416.gamess: `-qfixed`
434.zeusmp: `-qfixed`
435.gromacs: `-qfixed -qextname`
436.cactusADM: `-qfixed -qextname`
437.leslie3d: `-qfixed`
454.calculix: `-qfixed -qextname`
481.wrf: `-DSPEC_CPU_AIX -DNOUNDERSCORE`
482.sphinx3: `-qchars=signed`

Base Optimization Flags

C benchmarks:
```
-bmaxdata:0x40000000 -O5 -qlargepage -D_ILS_MACROS -blpdata
```

C++ benchmarks:
```
-bmaxdata:0x50000000 -O5 -qlargepage -D_ILS_MACROS -qrtti=all
-D__IBM_FAST_VECTOR -blpdata
```

Fortran benchmarks:
```
-bmaxdata:0x60000000 -O5 -qlargepage -qsmallstack=dynlenonheap
-qalias=nostd -blpdata
```

Benchmarks using both Fortran and C:
```
-bmaxdata:0x60000000 -O5 -qlargepage -D_ILS_MACROS
-qsmallstack=dynlenonheap -qalias=nostd -blpdata
```

Base Other Flags

C benchmarks:
```
-qipa=noobject -qipa=threads -qsuppress=1500-036
```

C++ benchmarks:
```
-qipa=noobject -qipa=threads -qsuppress=1500-036
```

Fortran benchmarks:
```
-qipa=noobject -qsuppress=1500-010 -qsuppress=cmpmsg -qipa=threads
-qsuppress=1500-036
```

Benchmarks using both Fortran and C:
```
-qipa=noobject -qsuppress=1500-010 -qsuppress=cmpmsg -qipa=threads
-qsuppress=1500-036
```

Peak Compiler Invocation

C benchmarks:
```
/usr/vac/bin/xlc -qlanglvl=extc99
```

C++ benchmarks:
```
/usr/vacpp/bin/xlC
```

Fortran benchmarks:
```
/usr/bin/xlf95
```

Benchmarks using both Fortran and C:
```
/usr/vac/bin/xlc -qlanglvl=extc99 /usr/bin/xlf95
```

Peak Portability Flags

410.bwaves: `-qfixed`
416.gamess: `-qfixed`
434.zeusmp: `-qfixed`
435.gromacs: `-qfixed -qextname`
436.cactusADM: `-qfixed -qextname`
437.leslie3d: `-qfixed`
454.calculix: `-qfixed -qextname`
481.wrf: `-DSPEC_CPU_AIX -DNOUNDERSCORE`
482.sphinx3: `-qchars=signed`

Peak Optimization Flags

C benchmarks:

Continued on next page

Peak Optimization Flags (Continued)

433.milc: `-bmaxdata:0x40000000 -O5 -qlargepage -D_ILS_MACROS -qalign=natural -blpdata`

470.lbm: `-O5 -qlargepage -D_ILS_MACROS -q64 -blpdata`

482.sphinx3: `-qpdf1`(pass 1) `-qpdf2`(pass 2) `-O5 -qlargepage -qenablevmx -qvecnvol -D_ILS_MACROS -blpdata`

C++ benchmarks:

444.namd: `-qpdf1`(pass 1) `-qpdf2`(pass 2) `-O5 -qlargepage -qenablevmx -qvecnvol -D_ILS_MACROS -blpdata`

447.dealII: `-bmaxdata:0x50000000 -O5 -qlargepage -D_ILS_MACROS -qrtti=all -D__IBM_FAST_VECTOR -blpdata`

450.soplex: `basepeak = yes`

453.povray: `-qpdf1`(pass 1) `-qpdf2`(pass 2) `-O5 -qlargepage -qenablevmx -qvecnvol -D_ILS_MACROS -qalign=natural -blpdata`

Fortran benchmarks:

410.bwaves: `-bmaxdata:0x50000000 -O5 -qlargepage -qenablevmx -qvecnvol -qsmallstack=dynlenonheap -blpdata`

416.gamess: `-bmaxdata:0x40000000 -qpdf1`(pass 1) `-qpdf2`(pass 2) `-O5 -qlargepage -qalias=nostd -blpdata`

434.zeusmp: `-bmaxdata:0x40000000 -qpdf1`(pass 1) `-qpdf2`(pass 2) `-O5 -qlargepage -qenablevmx -qvecnvol -qxlf90=nosignedzero -blpdata`

437.leslie3d: `-O5 -qlargepage -q64 -blpdata`

459.GemsFDTD: `-bmaxdata:0x50000000 -qpdf1`(pass 1) `-qpdf2`(pass 2) `-O5 -qlargepage -qenablevmx -qvecnvol -blpdata`

465.tonto: `-bmaxdata:0x20000000 -qpdf1`(pass 1) `-qpdf2`(pass 2) `-O5 -qlargepage -blpdata`

Benchmarks using both Fortran and C:

435.gromacs: `-qpdf1`(pass 1) `-qpdf2`(pass 2) `-O5 -qlargepage -qenablevmx -qvecnvol -D_ILS_MACROS -blpdata`

436.cactusADM: `-bmaxdata:0x60000000 -D_ILS_MACROS -blpdata`

454.calculix: `-O4 -qlargepage -q64 -D_ILS_MACROS -blpdata`

Continued on next page

Peak Optimization Flags (Continued)

481.wrf: `basepeak = yes`

Peak Other Flags

C benchmarks:
```
-qipa=noobject -qipa=threads -qsuppress=1500-036
```

C++ benchmarks:
```
-qipa=noobject -qipa=threads -qsuppress=1500-036
```

Fortran benchmarks:
```
-qipa=noobject -qsuppress=1500-010 -qsuppress=cmpmsg -qipa=threads
-qsuppress=1500-036
```

Benchmarks using both Fortran and C:
```
-qipa=noobject -qsuppress=1500-010 -qsuppress=cmpmsg -qipa=threads
-qsuppress=1500-036
```

The flags file that was used to format this result can be browsed at
`http://www.spec.org/cpu2006/flags/CPU2006_flags.20090715.html`

You can also download the XML flags source by saving the following link:
`http://www.spec.org/cpu2006/flags/CPU2006_flags.20090715.xml`

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.0.
Report generated on Tue Jul 22 11:06:51 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 12 June 2007.