SPEC® CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

NEC Corporation

Express5800/120Rg-1
(Intel Xeon processor 5160)

SPECfp®_rate2006 = 44.2

SPECfp_rate_base2006 = 42.9

CPU2006 license: 9006
Test sponsor: NEC Corporation
Tested by: NEC Corporation

Test date: May-2007
Hardware Availability: May-2007
Software Availability: Apr-2007

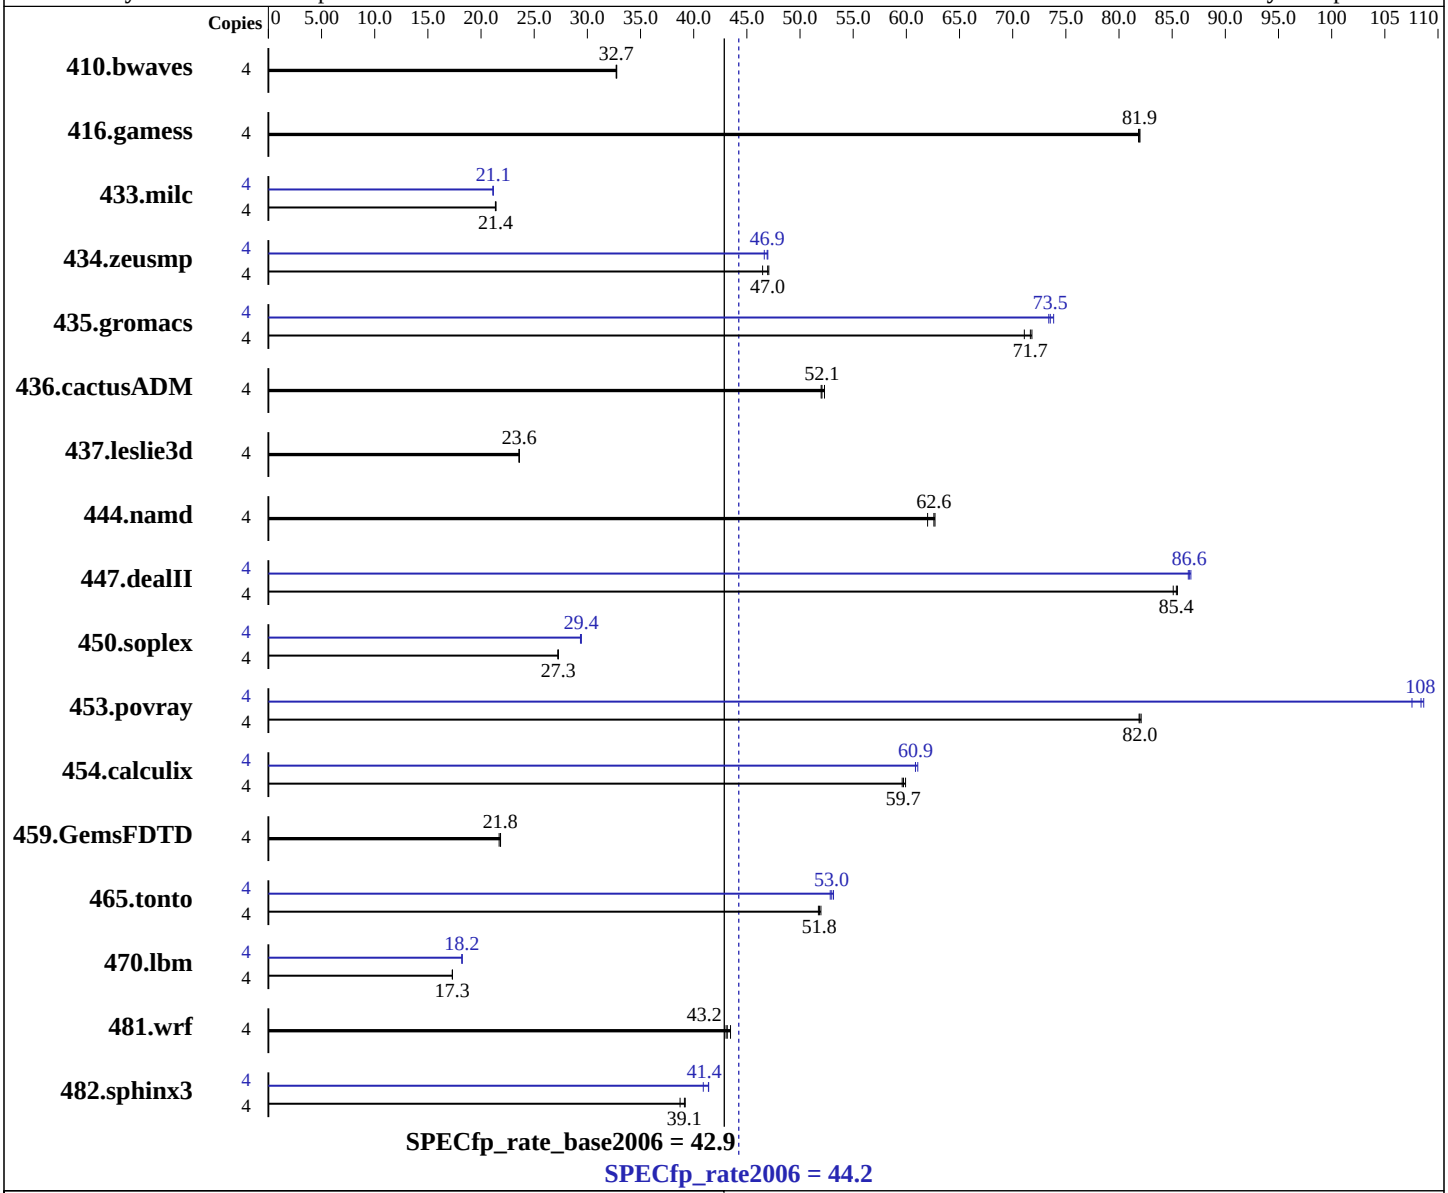

Hardware

CPU Name:	Intel Xeon 5160
CPU Characteristics:	3.00 GHz, 4MB L2, 1333MHz bus
CPU MHz:	3000
FPU:	Integrated
CPU(s) enabled:	4 cores, 2 chips, 2 cores/chip
CPU(s) orderable:	1,2 chips
Primary Cache:	32 KB I + 32 KB D on chip per core
Secondary Cache:	4 MB I+D on chip per chip

Continued on next page

Software

Operating System:	64-Bit SUSE LINUX Enterprise Server 10, Kernel 2.6.16.21-0.8-smp on an x86_64
Compiler:	Intel C++ Compiler for IA32/EM64T application, Version 9.1 - Build 20070320, Package-ID: l_cc_c_9.1.049 Intel Fortran Compiler for IA32/EM64T application, Version 9.1 - Build 20070320, Package ID: l_fc_c_9.1.045
Auto Parallel:	No
File System:	ReiserFS

Continued on next page

SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

NEC Corporation

Express5800/120Rg-1
(Intel Xeon processor 5160)

SPECfp_rate2006 = 44.2

SPECfp_rate_base2006 = 42.9

CPU2006 license: 9006
Test sponsor: NEC Corporation
Tested by: NEC Corporation

Test date: May-2007
Hardware Availability: May-2007
Software Availability: Apr-2007

L3 Cache: None
Other Cache: None
Memory: 8 GB (4x2 GB DDR2 5300F, 2 rank, CL5-5-5, ECC)
Disk Subsystem: 1x146.5 GB SAS, 15000RPM
Other Hardware: None

System State: Multiuser, Runlevel 3
Base Pointers: 64-bit
Peak Pointers: 32/64-bit
Other Software: None

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	4	**1661**	**32.7**	1659	32.8	1662	32.7	4	**1661**	**32.7**	1659	32.8	1662	32.7
416.gamess	4	956	82.0	**956**	**81.9**	957	81.8	4	956	82.0	**956**	**81.9**	957	81.8
433.milc	4	1716	21.4	1720	21.4	**1717**	**21.4**	4	1736	21.1	1738	21.1	**1737**	**21.1**
434.zeusmp	4	**775**	**47.0**	773	47.1	783	46.5	4	**776**	**46.9**	775	47.0	780	46.6
435.gromacs	4	**399**	**71.7**	402	71.1	398	71.8	4	**388**	**73.5**	389	73.4	387	73.9
436.cactusADM	4	914	52.3	919	52.0	**918**	**52.1**	4	914	52.3	919	52.0	**918**	**52.1**
437.leslie3d	4	1592	23.6	**1593**	**23.6**	1596	23.6	4	1592	23.6	**1593**	**23.6**	1596	23.6
444.namd	4	**513**	**62.6**	512	62.7	517	62.0	4	**513**	**62.6**	512	62.7	517	62.0
447.dealII	4	538	85.1	**536**	**85.4**	535	85.5	4	529	86.5	**528**	**86.6**	527	86.8
450.soplex	4	1225	27.2	1223	27.3	**1224**	**27.3**	4	1137	29.4	**1134**	**29.4**	1134	29.4
453.povray	4	**260**	**82.0**	259	82.1	260	81.9	4	198	108	196	109	**196**	**108**
454.calculix	4	**552**	**59.7**	554	59.6	551	59.9	4	540	61.1	**542**	**60.9**	542	60.9
459.GemsFDTD	4	1956	21.7	1944	21.8	**1944**	**21.8**	4	1956	21.7	1944	21.8	**1944**	**21.8**
465.tonto	4	757	52.0	**759**	**51.8**	761	51.7	4	**743**	**53.0**	745	52.8	741	53.1
470.lbm	4	3176	17.3	**3175**	**17.3**	3175	17.3	4	3017	18.2	**3017**	**18.2**	3018	18.2
481.wrf	4	**1035**	**43.2**	1028	43.5	1038	43.0	4	**1035**	**43.2**	1028	43.5	1038	43.0
482.sphinx3	4	2013	38.7	**1992**	**39.1**	1988	39.2	4	1906	40.9	1883	41.4	**1884**	**41.4**

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Operating System Notes

```
'ulimit -s unlimited' was used to set the stacksize to unlimited prior to run
'/usr/bin/taskset' used to bind processes to CPUs
```

General Notes

```
The system bus runs at 1333 MHz
All binaries were built with 64-bit Intel compiler except:
433.milc, 434.zeusmp, 450.soplex, 470.lbm and 482.sphinx3 in peak were built with
32-bit Intel compiler by changing the path for include and library files.

The Express5800/120Rg-1 and the Express5800/120Ri-2 models are
electronically equivalent.
The results have been measured on a Express5800/120Ri-2 model.
```

Base Compiler Invocation

C benchmarks:
icc

C++ benchmarks:
icpc

Fortran benchmarks:
ifort

Benchmarks using both Fortran and C:
icc ifort

Base Portability Flags

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
450.soplex: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64

Base Optimization Flags

C benchmarks:
-fast

C++ benchmarks:
-fast

Fortran benchmarks:
-fast

Benchmarks using both Fortran and C:
-fast

Peak Compiler Invocation

C benchmarks:
`/opt/intel/cc/9.1.049/bin/icc -I/opt/intel/cc/9.1.049/include -L/opt/intel/cc/9.1.049/lib`

C++ benchmarks (except as noted below):
`icpc`

450.soplex: `/opt/intel/cc/9.1.049/bin/icpc -I/opt/intel/cc/9.1.049/include -L/opt/intel/cc/9.1.049/lib`

Fortran benchmarks (except as noted below):
`ifort`

434.zeusmp: `/opt/intel/fc/9.1.045/bin/ifort -I/opt/intel/fc/9.1.045/include -L/opt/intel/fc/9.1.045/lib`

Benchmarks using both Fortran and C:
`icc ifort`

Peak Portability Flags

410.bwaves: `-DSPEC_CPU_LP64`
416.gamess: `-DSPEC_CPU_LP64`
435.gromacs: `-DSPEC_CPU_LP64 -nofor_main`
436.cactusADM: `-DSPEC_CPU_LP64 -nofor_main`
437.leslie3d: `-DSPEC_CPU_LP64`
444.namd: `-DSPEC_CPU_LP64`
447.dealII: `-DSPEC_CPU_LP64`
453.povray: `-DSPEC_CPU_LP64`
454.calculix: `-DSPEC_CPU_LP64 -nofor_main`
459.GemsFDTD: `-DSPEC_CPU_LP64`
465.tonto: `-DSPEC_CPU_LP64`
481.wrf: `-DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX`

Peak Optimization Flags

C benchmarks:

433.milc: `-prof_gen`(pass 1) `-prof_use`(pass 2) `-fast`

470.lbm: `Same as 433.milc`

482.sphinx3: `-fast`

C++ benchmarks:

Continued on next page

Peak Optimization Flags (Continued)

444.namd: `basepeak = yes`

447.dealII: `-prof_gen`(pass 1) `-prof_use`(pass 2) `-fast`

450.soplex: `Same as 447.dealII`

453.povray: `Same as 447.dealII`

Fortran benchmarks:

410.bwaves: `basepeak = yes`

416.gamess: `basepeak = yes`

434.zeusmp: `-fast`

437.leslie3d: `basepeak = yes`

459.GemsFDTD: `basepeak = yes`

465.tonto: `-prof_gen`(pass 1) `-prof_use`(pass 2) `-fast`

Benchmarks using both Fortran and C:

435.gromacs: `-prof_gen`(pass 1) `-prof_use`(pass 2) `-fast`

436.cactusADM: `basepeak = yes`

454.calculix: `Same as 435.gromacs`

481.wrf: `basepeak = yes`

The flags file that was used to format this result can be browsed at
`http://www.spec.org/cpu2006/flags/NEC-ic91-linux-flags.20090714.html`

You can also download the XML flags source by saving the following link:
`http://www.spec.org/cpu2006/flags/NEC-ic91-linux-flags.20090714.xml`

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.0.
Report generated on Tue Jul 22 13:02:18 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 10 July 2007.