



SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Supermicro Motherboard PDSMI+

SPECint®2006 = 17.6
SPECint_base2006 = 16.7

CPU2006 license: 001176


Test sponsor: Supermicro

Tested by: Supermicro

Test date: Jul-2007

Hardware Availability: May-2007

Software Availability: Apr-2007

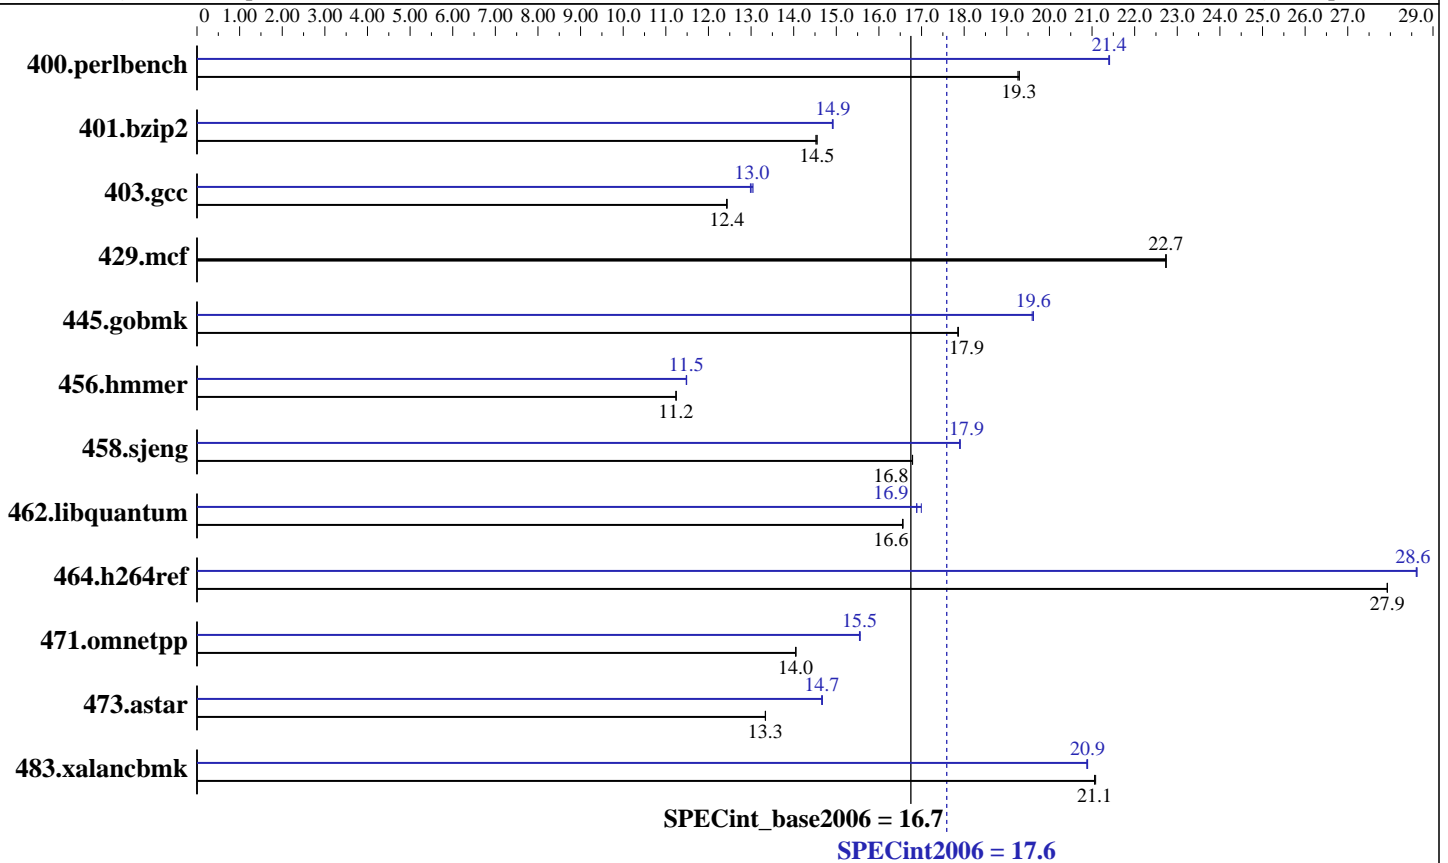

Hardware

CPU Name: Intel Core 2 Quad Q6700
 CPU Characteristics: 2.67GHz 1066 MHz FSB
 CPU MHz: 2667
 FPU: Integrated
 CPU(s) enabled: 4 cores, 1 chip, 4 cores/chip
 CPU(s) orderable: 1 chip
 Primary Cache: 32 KB I + 32 KB D on chip per core
 Secondary Cache: 8 MB I+D on chip per chip, 4 MB shared / 2 cores
 L3 Cache: None
 Other Cache: None
 Memory: 2 GB (2 X 1GB ECC PC2-5300, CL5, DDR2)
 Disk Subsystem: ST3750640AS 750GB SATA II, 7200RPM
 Other Hardware: None

Software

Operating System: Windows Server 2003 Enterprise Edition W/ SP1
 Compiler: Intel C++ Compiler for IA32 version 9.1
 Build no 20070322Z
 Microsoft Visual Studio .Net 2003 (for libraries)
 Auto Parallel: No
 File System: NTFS
 System State: Default
 Base Pointers: 32-bit
 Peak Pointers: 32-bit
 Other Software: SmartHeap Library Version 8.0



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Supermicro
Motherboard PDSMI+

SPECint2006 = 17.6
SPECint_base2006 = 16.7

CPU2006 license: 001176
Test sponsor: Supermicro
Tested by: Supermicro

Test date: Jul-2007
Hardware Availability: May-2007
Software Availability: Apr-2007

Results Table

Benchmark	Base						Peak					
	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	507	19.3	<u>506</u>	<u>19.3</u>	506	19.3	456	21.4	<u>456</u>	<u>21.4</u>	457	21.4
401.bzip2	665	14.5	663	14.5	<u>663</u>	<u>14.5</u>	647	14.9	647	14.9	<u>647</u>	<u>14.9</u>
403.gcc	648	12.4	647	12.4	<u>648</u>	<u>12.4</u>	617	13.0	<u>618</u>	<u>13.0</u>	620	13.0
429.mcf	401	22.7	401	22.7	<u>401</u>	<u>22.7</u>	401	22.7	401	22.7	<u>401</u>	<u>22.7</u>
445.gobmk	587	17.9	588	17.9	<u>587</u>	<u>17.9</u>	<u>535</u>	<u>19.6</u>	534	19.6	535	19.6
456.hammer	830	11.2	<u>830</u>	<u>11.2</u>	830	11.2	<u>813</u>	<u>11.5</u>	812	11.5	813	11.5
458.sjeng	721	16.8	721	16.8	<u>721</u>	<u>16.8</u>	<u>676</u>	<u>17.9</u>	676	17.9	676	17.9
462.libquantum	<u>1252</u>	<u>16.6</u>	1251	16.6	1252	16.6	1227	16.9	1219	17.0	<u>1227</u>	<u>16.9</u>
464.h264ref	<u>792</u>	<u>27.9</u>	792	27.9	792	27.9	773	28.6	<u>773</u>	<u>28.6</u>	774	28.6
471.omnetpp	445	14.0	445	14.1	<u>445</u>	<u>14.0</u>	<u>402</u>	<u>15.5</u>	402	15.6	402	15.5
473.astar	526	13.3	<u>526</u>	<u>13.3</u>	526	13.3	<u>479</u>	<u>14.7</u>	478	14.7	479	14.7
483.xalancbmk	328	21.1	<u>328</u>	<u>21.1</u>	327	21.1	<u>330</u>	<u>20.9</u>	331	20.9	330	20.9

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

General Notes

Tested systems can be used with SC816S-R700 case,
To ensure system stability,
a 500W (minimum) ATX power supply [4-pin (+12V), 8-pin (+12V) and 24-pin are required]
Product description located as of
<http://www.supermicro.com/products/motherboard/Xeon3000/3000/PDSMI+.cfm>
The system bus runs at 1066 MHz

Base Compiler Invocation

C benchmarks:
icl -Qvc7.1 -Qc99
C++ benchmarks:
icl -Qvc7.1

Base Portability Flags

403.gcc: -DSPEC_CPU_WIN32
464.h264ref: -DSPEC_CPU_NO_INTTYPES -DWIN32



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Supermicro

Motherboard PDSMI+

SPECint2006 =

17.6

SPECint_base2006 =

16.7

CPU2006 license: 001176

Test sponsor: Supermicro

Tested by: Supermicro

Test date: Jul-2007

Hardware Availability: May-2007

Software Availability: Apr-2007

Base Optimization Flags

C benchmarks:

-fast /F512000000 shlw32m.lib -link /FORCE:MULTIPLE

C++ benchmarks:

-fast -Qcxx_features /F512000000 shlw32m.lib
-link /FORCE:MULTIPLE

Base Other Flags

C benchmarks:

403.gcc: -Dalloca=_alloca

Peak Compiler Invocation

C benchmarks:

icl -Qvc7.1 -Qc99

C++ benchmarks:

icl -Qvc7.1

Peak Portability Flags

403.gcc: -DSPEC_CPU_WIN32
464.h264ref: -DSPEC_CPU_NO_INTTYPES -DWIN32

Peak Optimization Flags

C benchmarks:

400.perlbench: -Qprof_gen(pass 1) -Qprof_use(pass 2) -fast /F512000000
shlw32m.lib -link /FORCE:MULTIPLE

401.bzip2: Same as 400.perlbench

403.gcc: Same as 400.perlbench

429.mcf: basepeak = yes

445.gobmk: Same as 400.perlbench

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Supermicro

Motherboard PDSMI+

SPECint2006 =

17.6

SPECint_base2006 =

16.7

CPU2006 license: 001176

Test sponsor: Supermicro

Tested by: Supermicro

Test date: Jul-2007

Hardware Availability: May-2007

Software Availability: Apr-2007

Peak Optimization Flags (Continued)

456.hmmmer: Same as 400.perlbench

458.sjeng: Same as 400.perlbench

462.libquantum: Same as 400.perlbench

464.h264ref: Same as 400.perlbench

C++ benchmarks:

471.omnetpp: -Qprof_gen(pass 1) -Qprof_use(pass 2) -fast -Qcxx_features
/F512000000 shlw32m.lib -link /FORCE:MULTIPLE

473.astar: -Qprof_gen(pass 1) -Qprof_use(pass 2) -QxP -O2 -Qipo
-Qprec-div- -Qunroll14 -Ob2 -Qsfa16 -Qcxx_features
/F512000000 shlw32m.lib -link /FORCE:MULTIPLE

483.xalancbmk: Same as 471.omnetpp

Peak Other Flags

C benchmarks:

403.gcc: -Dalloca=_alloca

The flags file that was used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic91-ia32-flags.html>

You can also download the XML flags source by saving the following link:

<http://www.spec.org/cpu2006/flags/Intel-ic91-ia32-flags.xml>

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.0.
Report generated on Tue Jul 22 12:45:57 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 8 August 2007.