



SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECint_rate2006 = 31.3

Dell Precision M6300 (Intel X7900, 2.80 GHz)

SPECint_rate_base2006 = 29.0

CPU2006 license: 55


Test sponsor: Dell Inc.

Tested by: Dell Inc.

Test date: Aug-2007

Hardware Availability: Aug-2007

Software Availability: Jun-2007

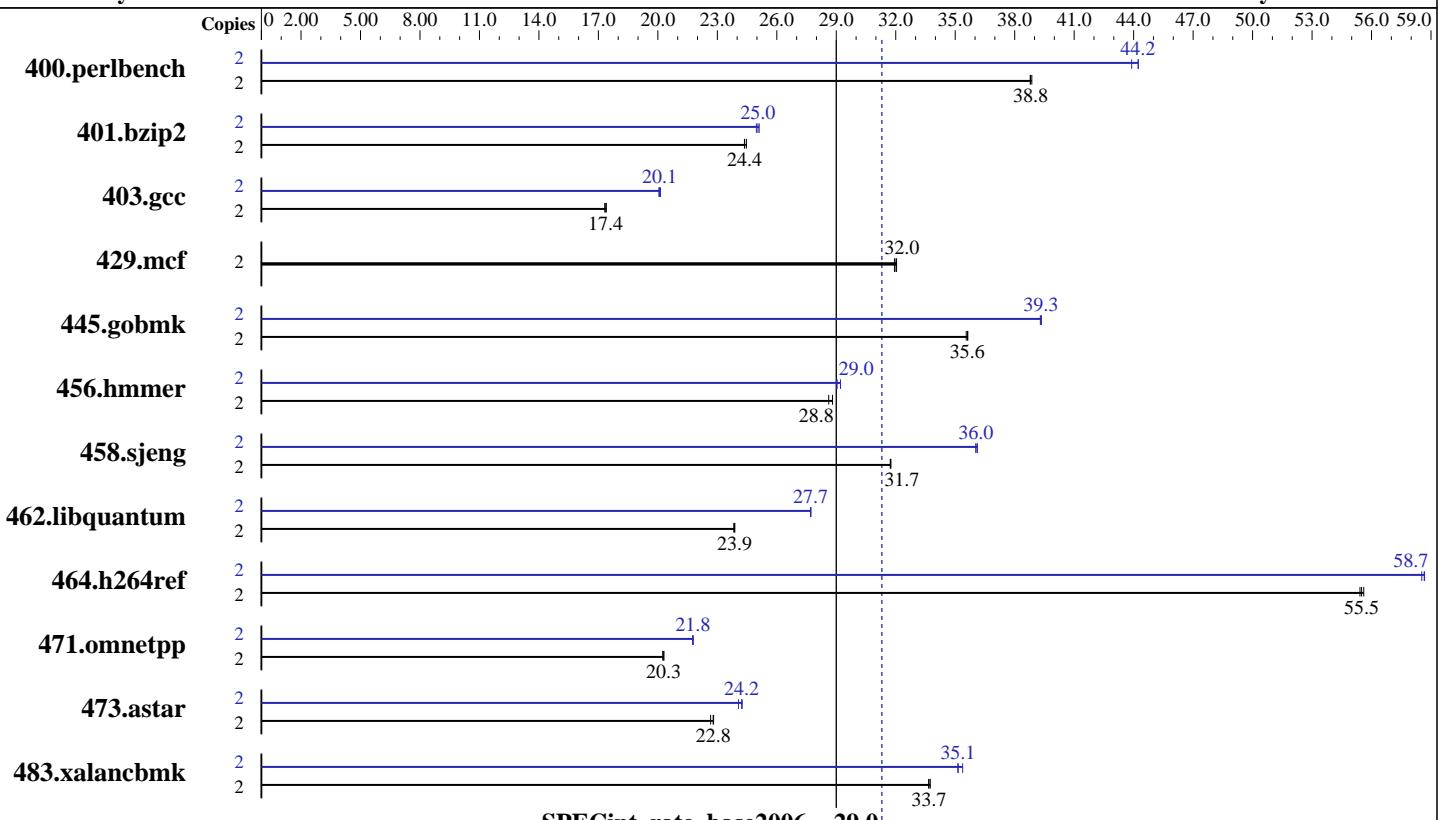

Hardware

CPU Name: Intel Core 2 Extreme X7900
 CPU Characteristics: 800 MHz Bus Speed
 CPU MHz: 2800
 FPU: Integrated
 CPU(s) enabled: 2 cores, 1 chip, 2 cores/chip
 CPU(s) orderable: 1 chip
 Primary Cache: 32 KB I + 32 KB D on chip per core
 Secondary Cache: 4 MB I+D on chip per chip
 L3 Cache: None
 Other Cache: None
 Memory: 4 GB (2x2 GB 667 MHz CL5 DDR2)
 Disk Subsystem: 1 x 120GB SATA 7200 RPM
 Other Hardware: None

Software

Operating System: Windows XP Professional x64 Edition SP2
 Compiler: Intel C++ Compiler for IA-32, Version 10.0 Build 20070426 Package ID: W_CC_P_10.0.025 Microsoft Visual Studio 2005 SP1
 Auto Parallel: No
 File System: NTFS
 System State: --
 Base Pointers: 32-bit
 Peak Pointers: 32-bit
 Other Software: MicroQuill SmartHeap Library 8.0



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECint_rate2006 = 31.3

Dell Precision M6300 (Intel X7900, 2.80 GHz)

SPECint_rate_base2006 = 29.0

CPU2006 license: 55

Test date: Aug-2007

Test sponsor: Dell Inc.

Hardware Availability: Aug-2007

Tested by: Dell Inc.

Software Availability: Jun-2007

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	2	504	38.8	504	38.8	503	38.9	2	445	43.9	442	44.2	442	44.2
401.bzip2	2	789	24.5	792	24.4	792	24.4	2	773	25.0	769	25.1	771	25.0
403.gcc	2	930	17.3	925	17.4	927	17.4	2	803	20.1	801	20.1	800	20.1
429.mcf	2	571	31.9	569	32.0	570	32.0	2	571	31.9	569	32.0	570	32.0
445.gobmk	2	590	35.6	589	35.6	589	35.6	2	534	39.3	533	39.3	533	39.3
456.hmmer	2	648	28.8	648	28.8	652	28.6	2	643	29.0	643	29.0	639	29.2
458.sjeng	2	763	31.7	762	31.8	762	31.7	2	671	36.0	670	36.1	671	36.0
462.libquantum	2	1739	23.8	1736	23.9	1736	23.9	2	1495	27.7	1495	27.7	1496	27.7
464.h264ref	2	799	55.4	798	55.5	796	55.6	2	754	58.7	755	58.7	756	58.5
471.omnetpp	2	617	20.2	616	20.3	616	20.3	2	574	21.8	575	21.8	574	21.8
473.astar	2	616	22.8	620	22.7	615	22.8	2	583	24.1	579	24.3	580	24.2
483.xalancbmk	2	410	33.7	410	33.7	409	33.7	2	393	35.1	390	35.4	393	35.1

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

General Notes

Binaries were built on Windows Vista Ultimate (64-bit)

Base Compiler Invocation

C benchmarks:

icl -Qstd=c99

C++ benchmarks:

icl

Base Portability Flags

403.gcc: -DSPEC_CPU_WIN32

464.h264ref: -DSPEC_CPU_NO_INTTYPES -DWIN32

Base Optimization Flags

C benchmarks:

-fast /F512000000 shlw32m.lib

-link /FORCE:MULTIPLE

C++ benchmarks:

-fast -Qcxx_features /F512000000 shlw32m.lib
-link /FORCE:MULTIPLE



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECint_rate2006 = 31.3

Dell Precision M6300 (Intel X7900, 2.80 GHz)

SPECint_rate_base2006 = 29.0

CPU2006 license: 55

Test sponsor: Dell Inc.

Tested by: Dell Inc.

Test date: Aug-2007

Hardware Availability: Aug-2007

Software Availability: Jun-2007

Base Other Flags

C benchmarks:

403.gcc: -Dalloca=_alloca

Peak Compiler Invocation

C benchmarks:

icl -Qstd=c99

C++ benchmarks:

icl

Peak Portability Flags

403.gcc: -DSPEC_CPU_WIN32

464.h264ref: -DSPEC_CPU_NO_INTTYPES -DWIN32

Peak Optimization Flags

C benchmarks:

400.perlbench: ONESTEP -Qprof_gen(pass 1) -Qprof_use(pass 2) -fast
-Qansi-alias -Qprefetch /F512000000 shlw32m.lib
-link /FORCE:MULTIPLE

401.bzip2: ONESTEP -Qprof_gen(pass 1) -Qprof_use(pass 2) -fast
/F512000000 shlw32m.lib -link /FORCE:MULTIPLE

403.gcc: ONESTEP -Qprof_gen(pass 1) -Qprof_use(pass 2) -fast
/F512000000 -link /FORCE:MULTIPLE

429.mcf: basepeak = yes

445.gobmk: -Qprof_gen(pass 1) -Qprof_use(pass 2) -QxT -O2 -Qipo
-Qprec-div- -Qansi-alias /F512000000
-link /FORCE:MULTIPLE

456.hammer: ONESTEP -Qprof_gen(pass 1) -Qprof_use(pass 2) -fast
-Qunroll12 -Qansi-alias /F512000000 shlw32m.lib
-link /FORCE:MULTIPLE

458.sjeng: ONESTEP -Qprof_gen(pass 1) -Qprof_use(pass 2) -fast
-Qunroll14 /F512000000 shlw32m.lib
-link /FORCE:MULTIPLE

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECint_rate2006 = 31.3

Dell Precision M6300 (Intel X7900, 2.80 GHz)

SPECint_rate_base2006 = 29.0

CPU2006 license: 55

Test date: Aug-2007

Test sponsor: Dell Inc.

Hardware Availability: Aug-2007

Tested by: Dell Inc.

Software Availability: Jun-2007

Peak Optimization Flags (Continued)

```
462.libquantum: ONESTEP -Qprof_gen(pass 1) -Qprof_use(pass 2) -fast  
                  -Qunroll14 -Ob0 -Qprefetch -Qopt-streaming-stores:always  
                  /F512000000 shlw32m.lib           -link /FORCE:MULTIPLE
```

464.h264ref: Same as 456.hmmr

C++ benchmarks:

```
ONESTEP -Qprof_gen(pass 1) -Qprof_use(pass 2) -fast -Qansi-alias  
-Qcxx_features /F512000000 shlw32m.lib  
                  -link /FORCE:MULTIPLE
```

Peak Other Flags

C benchmarks:

403.gcc: -Dalloca=_alloca

The flags file that was used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/dell.ic10.windows.flags.html>

You can also download the XML flags source by saving the following link:

<http://www.spec.org/cpu2006/flags/dell.ic10.windows.flags.xml>

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.0.

Report generated on Tue Jul 22 13:17:15 2014 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 4 September 2007.