SPEC® CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

Dell Precision 690 (Intel Xeon X5365, 3.00 GHz)

SPECfp®_rate2006 = 62.4

SPECfp_rate_base2006 = 61.3

CPU2006 license: 55
Test sponsor: Dell Inc.
Tested by: Dell Inc.

Test date: Aug-2007
Hardware Availability: Aug-2007
Software Availability: Jun-2007

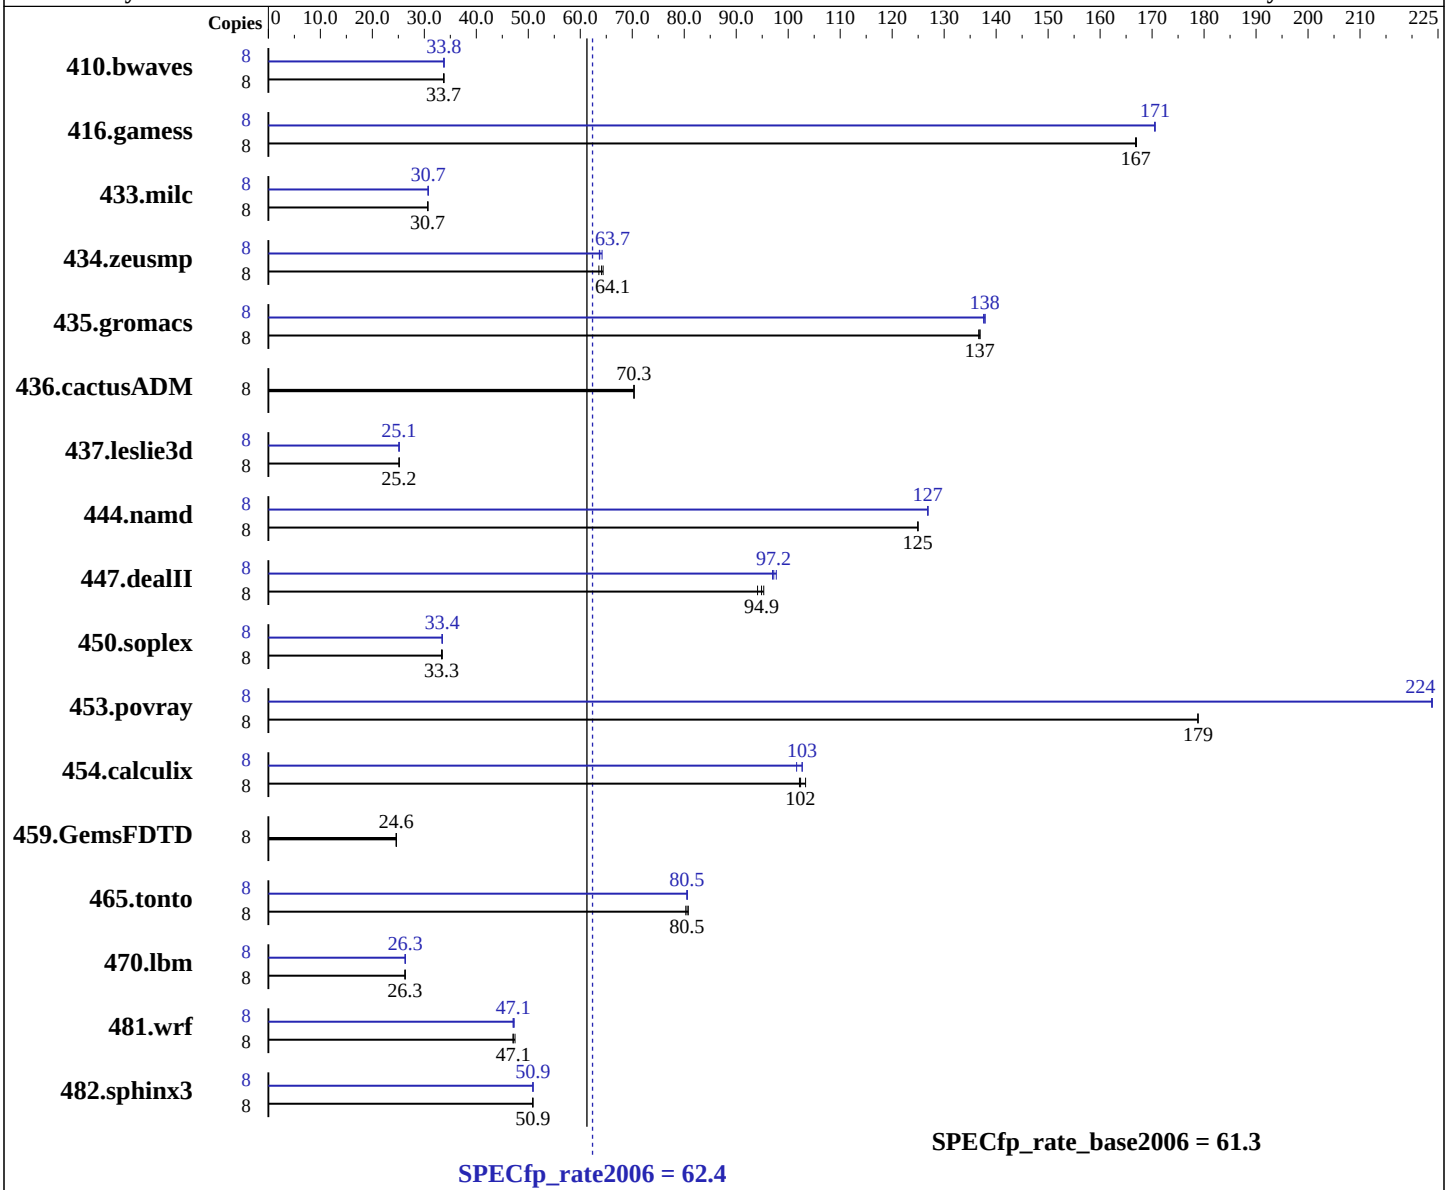

Hardware

CPU Name:	Intel Xeon X5365
CPU Characteristics:	1333 MHz Bus Speed
CPU MHz:	3000
FPU:	Integrated
CPU(s) enabled:	8 cores, 2 chips, 4 cores/chip
CPU(s) orderable:	1,2 chips
Primary Cache:	32 KB I + 32 KB D on chip per core
Secondary Cache:	8 MB I+D on chip per chip, 4 MB shared / 2 cores

Continued on next page

Software

Operating System:	Windows XP Professional x64 Edition SP2
Compiler:	Intel C++ Compiler for Intel 64, Version 10.0 Build 20070426 Package ID: W_CC_P_10.0.025 Intel Visual Fortran Compiler for Intel 64, Version 10.0 Build 20070426 Package ID: W_FC_P_10.0.025 Microsoft Visual Studio 2005 SP1
Auto Parallel:	No
File System:	NTFS

Continued on next page

SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

Dell Precision 690 (Intel Xeon X5365, 3.00 GHz)

SPECfp_rate2006 = 62.4

SPECfp_rate_base2006 = 61.3

CPU2006 license: 55
Test sponsor: Dell Inc.
Tested by: Dell Inc.

Test date: Aug-2007
Hardware Availability: Aug-2007
Software Availability: Jun-2007

L3 Cache: None
Other Cache: None
Memory: 16 GB (8x2 GB 667 MHz ECC CL5 FB-DIMM)
Disk Subsystem: 1 x 73GB SAS 10K RPM
Other Hardware: None

System State: Default
Base Pointers: 32/64-bit
Peak Pointers: 32/64-bit
Other Software: MicroQuill SmartHeap Library 8.0 for x64

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	8	3218	33.8	**3222**	**33.7**	3226	33.7	8	3214	33.8	**3221**	**33.8**	3222	33.7
416.gamess	8	**939**	**167**	939	167	938	167	8	919	170	918	171	**918**	**171**
433.milc	8	2393	30.7	2396	30.7	**2395**	**30.7**	8	2389	30.7	**2389**	**30.7**	2389	30.7
434.zeusmp	8	1131	64.4	**1136**	**64.1**	1145	63.6	8	**1142**	**63.7**	1143	63.7	1134	64.2
435.gromacs	8	418	137	417	137	**417**	**137**	8	414	138	415	138	**415**	**138**
436.cactusADM	8	1359	70.3	1359	70.3	**1359**	**70.3**	8	1359	70.3	1359	70.3	**1359**	**70.3**
437.leslie3d	8	2988	25.2	**2990**	**25.2**	2991	25.1	8	**2991**	**25.1**	2989	25.2	2993	25.1
444.namd	8	513	125	**514**	**125**	514	125	8	**506**	**127**	506	127	506	127
447.dealII	8	**965**	**94.9**	960	95.3	973	94.1	8	**941**	**97.2**	944	97.0	937	97.7
450.soplex	8	1994	33.5	**2001**	**33.3**	2002	33.3	8	1997	33.4	1994	33.5	**1996**	**33.4**
453.povray	8	238	179	**238**	**179**	238	179	8	190	224	**190**	**224**	190	224
454.calculix	8	639	103	**645**	**102**	646	102	8	649	102	**643**	**103**	643	103
459.GemsFDTD	8	3451	24.6	**3450**	**24.6**	3447	24.6	8	3451	24.6	**3450**	**24.6**	3447	24.6
465.tonto	8	980	80.3	**977**	**80.5**	974	80.8	8	977	80.6	978	80.5	**978**	**80.5**
470.lbm	8	**4181**	**26.3**	4174	26.3	4183	26.3	8	**4175**	**26.3**	4176	26.3	4175	26.3
481.wrf	8	1883	47.4	**1896**	**47.1**	1899	47.1	8	1890	47.3	**1897**	**47.1**	1897	47.1
482.sphinx3	8	3067	50.8	**3065**	**50.9**	3063	50.9	8	3063	50.9	**3063**	**50.9**	3064	50.9

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

General Notes

```
Binaries were built on Windows Vista Ultimate (64-bit)

BIOS Settings
  Snoop Filter                 : OFF
  Adjacent Cache Line Prefetch : OFF
  Hardware Prefetcher          : OFF

  Snoop Filter
    Preserves cache coherency while minimizing snoops
    to remote nodes.

  Adjacent Cache Line Prefetch
    Prefetch data in order to shorten execution cycles
    and maximize data processing efficiency.
```

Continued on next page

General Notes (Continued)

```
    Optimization for high-frequency FSB applicatons: ON
```

Base Compiler Invocation

C benchmarks:
```
icl -Qstd=c99
```

C++ benchmarks:
```
icl
```

Fortran benchmarks:
```
ifort
```

Benchmarks using both Fortran and C:
```
icl -Qstd=c99 ifort
```

Base Portability Flags

```
    410.bwaves: -DSPEC_CPU_P64
    416.gamess: -DSPEC_CPU_P64
      433.milc: -D_Complex= -DSPEC_CPU_P64
    434.zeusmp: -DSPEC_CPU_P64
    435.gromacs: -D_Complex= -DSPEC_CPU_P64
436.cactusADM: -D_Complex= -DSPEC_CPU_P64 -Qlowercase /assume:underscore
    437.leslie3d: -DSPEC_CPU_P64
      444.namd: -DSPEC_CPU_P64 /TP
     447.dealII: -D_Complex= -DSPEC_CPU_P64 -DBOOST_NO_INTRINSIC_WCHAR_T
                 -DDEAL_II_MEMBER_VAR_SPECIALIZATION_BUG
     450.soplex: -DSPEC_CPU_P64
     453.povray: -DSPEC_CPU_P64 -DSPEC_CPU_WINDOWS_ICL
    454.calculix: -D_Complex= -DSPEC_CPU_P64 -DSPEC_CPU_NOZMODIFIER
                 -Qlowercase
459.GemsFDTD: -DSPEC_CPU_P64
       465.tonto: -DSPEC_CPU_P64
        470.lbm: -D_Complex= -DSPEC_CPU_P64
        481.wrf: -DSPEC_CPU_P64 -DSPEC_CPU_WINDOWS_ICL
    482.sphinx3: -D_Complex= -DSPEC_CPU_P64
```

Base Optimization Flags

C benchmarks:
```
    -fast -Qauto_ilp32 /F950000000 shlW64M.lib
                -link /FORCE:MULTIPLE
```

Continued on next page

Base Optimization Flags (Continued)

C++ benchmarks:
```
-fast -Qcxx_features -Qauto_ilp32 /F950000000 shlW64M.lib
              -link /FORCE:MULTIPLE
```

Fortran benchmarks:
```
-fast /F950000000            -link /FORCE:MULTIPLE
```

Benchmarks using both Fortran and C:
```
-fast -Qauto_ilp32 /F950000000            -link /FORCE:MULTIPLE
```

Peak Compiler Invocation

C benchmarks:
```
icl -Qstd=c99
```

C++ benchmarks:
```
icl
```

Fortran benchmarks:
```
ifort
```

Benchmarks using both Fortran and C:
```
icl -Qstd=c99 ifort
```

Peak Portability Flags

Same as Base Portability Flags

Peak Optimization Flags

C benchmarks:

433.milc: ONESTEP -Qprof_gen(pass 1) -Qprof_use(pass 2) -fast
-Qunroll2 -Oa -Qauto_ilp32 /F950000000 shlW64M.lib
-link /FORCE:MULTIPLE

470.lbm: ONESTEP -Qprof_gen(pass 1) -Qprof_use(pass 2) -fast
-Qunroll2 -Qscalar-rep- -Qprefetch -Qauto_ilp32
/F950000000 shlW64M.lib -link /FORCE:MULTIPLE

482.sphinx3: ONESTEP -Qprof_gen(pass 1) -Qprof_use(pass 2) -fast
-Qunroll2 -Qauto_ilp32 /F950000000 shlW64M.lib
-link /FORCE:MULTIPLE

Continued on next page

Peak Optimization Flags (Continued)

C++ benchmarks:

444.namd: ONESTEP -Qprof_gen(pass 1) -Qprof_use(pass 2) -fast -Oa -Qcxx_features -Qauto_ilp32 /F950000000 shlW64M.lib -link /FORCE:MULTIPLE

447.dealII: ONESTEP -Qprof_gen(pass 1) -Qprof_use(pass 2) -fast -Qprefetch -Qcxx_features -Qauto_ilp32 /F950000000 shlW64M.lib -link /FORCE:MULTIPLE

450.soplex: ONESTEP -Qprof_gen(pass 1) -Qprof_use(pass 2) -fast -Qcxx_features -Qauto_ilp32 /F950000000 shlW64M.lib -link /FORCE:MULTIPLE

453.povray: ONESTEP -Qprof_gen(pass 1) -Qprof_use(pass 2) -fast -Qansi-alias -Qcxx_features -Qauto_ilp32 /F950000000 shlW64M.lib -link /FORCE:MULTIPLE

Fortran benchmarks:

410.bwaves: ONESTEP -fast /F950000000 -link /FORCE:MULTIPLE

416.gamess: ONESTEP -Qprof_gen(pass 1) -Qprof_use(pass 2) -fast -Qunroll2 -Ob0 -Qansi-alias -Qscalar-rep- /F950000000 -link /FORCE:MULTIPLE

434.zeusmp: ONESTEP -Qprof_gen(pass 1) -Qprof_use(pass 2) -QxT -O2 -Qprec-div- -Qunroll0 -Qscalar-rep- /F950000000 -link /FORCE:MULTIPLE

437.leslie3d: ONESTEP -Qprof_gen(pass 1) -Qprof_use(pass 2) -fast /F950000000 -link /FORCE:MULTIPLE

459.GemsFDTD: basepeak = yes

465.tonto: Same as 437.leslie3d

Benchmarks using both Fortran and C:

435.gromacs: -Qprof_gen(pass 1) -Qprof_use(pass 2) -fast -Oa -Qauto_ilp32 /F950000000 -link /FORCE:MULTIPLE

436.cactusADM: basepeak = yes

454.calculix: -fast -Qauto_ilp32 /F950000000 -link /FORCE:MULTIPLE

481.wrf: Same as 454.calculix

The flags file that was used to format this result can be browsed at
http://www.spec.org/cpu2006/flags/dell.ic10.windows.flags.html

You can also download the XML flags source by saving the following link:
http://www.spec.org/cpu2006/flags/dell.ic10.windows.flags.xml

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.0.
Report generated on Tue Jul 22 13:10:34 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 4 September 2007.