SPEC® CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Hewlett-Packard Company

Proliant BL460c
(3.00 GHz, Intel Xeon processor X5365)

SPECfp®_rate2006 = 66.8

SPECfp_rate_base2006 = 63.1

CPU2006 license: 3
Test sponsor: Hewlett-Packard Company
Tested by: Hewlett-Packard Company

Test date: Aug-2007
Hardware Availability: Sep-2007
Software Availability: Nov-2007

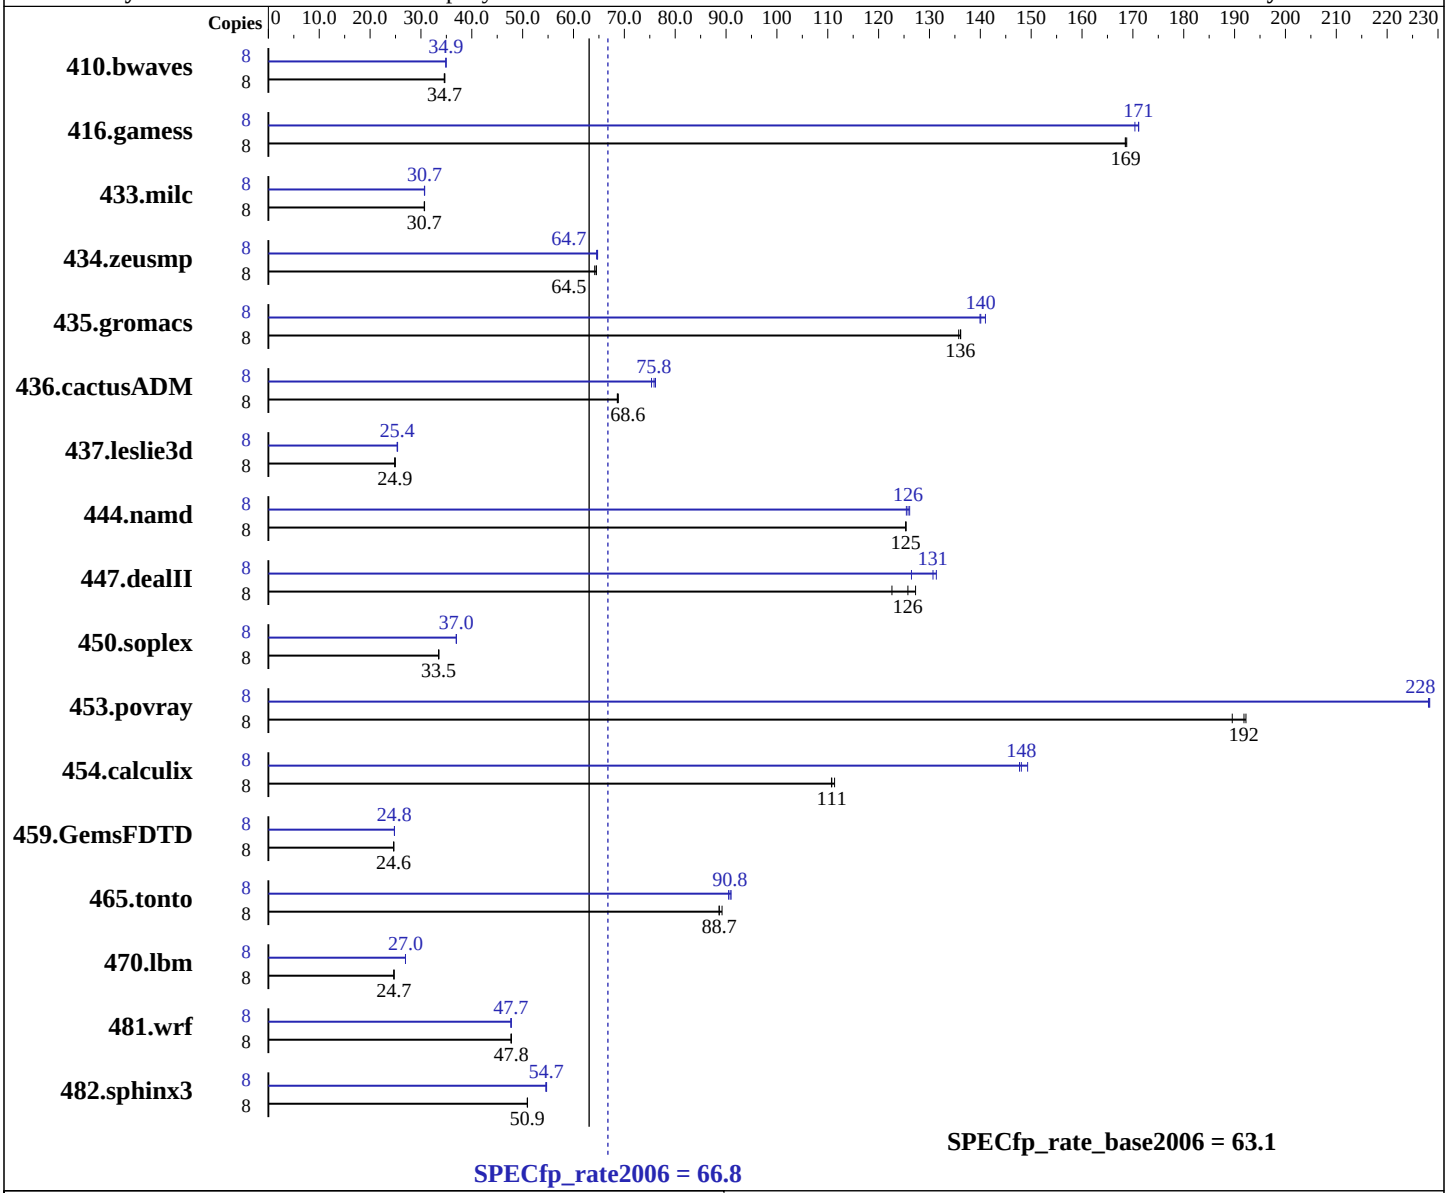

Hardware

CPU Name:	Intel Xeon X5365
CPU Characteristics:	3.0 GHz, 2x4 MB L2 shared, 1333 MHz system bus
CPU MHz:	3000
FPU:	Integrated
CPU(s) enabled:	8 cores, 2 chips, 4 cores/chip
CPU(s) orderable:	1,2 chips
Primary Cache:	32 KB I + 32 KB D on chip per core
Secondary Cache:	8 MB I+D on chip per chip, 4 MB shared / 2 cores

Continued on next page

Software

Operating System:	SuSE Linux Enterprise Server 10 (x86_64) SP1 kernel 2.6.16.46-0.12-smp
Compiler:	Intel C++ and Fortran Compiler for Linux32 and Linux64 version 10.1 Build 20070725
Auto Parallel:	No
File System:	ext2
System State:	Multi-user run level 3
Base Pointers:	64-bit

Continued on next page

SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Hewlett-Packard Company

Proliant BL460c
(3.00 GHz, Intel Xeon processor X5365)

SPECfp_rate2006 = 66.8

SPECfp_rate_base2006 = 63.1

CPU2006 license: 3
Test sponsor: Hewlett-Packard Company
Tested by: Hewlett-Packard Company

Test date: Aug-2007
Hardware Availability: Sep-2007
Software Availability: Nov-2007

L3 Cache: None
Other Cache: None
Memory: 16 GB (8x2 GB PC2-5300F CL5)
Disk Subsystem: 1x72 GB 10 K SAS
Other Hardware: None

Peak Pointers: 32/64-bit
Other Software: binutils-2.17.50

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	8	3144	34.6	**3137**	**34.7**	3134	34.7	8	**3113**	**34.9**	3114	34.9	3112	34.9
416.gamess	8	928	169	**929**	**169**	930	169	8	919	170	915	171	**915**	**171**
433.milc	8	**2394**	**30.7**	2391	30.7	2395	30.7	8	**2392**	**30.7**	2393	30.7	2390	30.7
434.zeusmp	8	**1129**	**64.5**	1129	64.5	1135	64.2	8	1128	64.5	**1125**	**64.7**	1125	64.7
435.gromacs	8	421	136	**420**	**136**	420	136	8	405	141	**408**	**140**	408	140
436.cactusADM	8	1393	68.6	**1393**	**68.6**	1389	68.8	8	**1260**	**75.8**	1256	76.1	1269	75.3
437.leslie3d	8	3027	24.8	**3022**	**24.9**	3013	25.0	8	2968	25.3	**2965**	**25.4**	2959	25.4
444.namd	8	512	125	512	125	**512**	**125**	8	511	125	**510**	**126**	509	126
447.dealII	8	719	127	746	123	**728**	**126**	8	**700**	**131**	697	131	724	126
450.soplex	8	1994	33.5	1991	33.5	**1991**	**33.5**	8	1805	37.0	1805	37.0	**1805**	**37.0**
453.povray	8	225	190	221	192	**222**	**192**	8	186	228	187	228	**186**	**228**
454.calculix	8	593	111	**596**	**111**	596	111	8	447	148	**446**	**148**	442	149
459.GemsFDTD	8	3446	24.6	3443	24.7	**3445**	**24.6**	8	3425	24.8	**3423**	**24.8**	3422	24.8
465.tonto	8	**888**	**88.7**	888	88.6	882	89.2	8	865	91.0	**867**	**90.8**	870	90.5
470.lbm	8	4452	24.7	4450	24.7	**4451**	**24.7**	8	4077	27.0	4077	27.0	**4077**	**27.0**
481.wrf	8	1872	47.7	**1871**	**47.8**	1870	47.8	8	1873	47.7	**1872**	**47.7**	1871	47.8
482.sphinx3	8	3060	51.0	**3061**	**50.9**	3062	50.9	8	2858	54.6	2850	54.7	**2853**	**54.7**

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Operating System Notes

```
'ulimit -s unlimited' was used to set the stacksize to unlimited
'/usr/bin/taskset' used to bind processes to CPUs
OMP_NUM_THREADS set to number of cores
KMP_AFFINITY set to physical,0
KMP_STACKSIZE set to 200M
```

Platform Notes

```
BIOS configuration:
  Power Regulator set to Static High Performance Mode
  Adjacent Sector Prefetch Disabled
  Hardware Prefetcher Disabled
```

Base Compiler Invocation

C benchmarks:
icc

C++ benchmarks:
icpc

Fortran benchmarks:
ifort

Benchmarks using both Fortran and C:
icc ifort

Base Portability Flags

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
450.soplex: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64

Base Optimization Flags

C benchmarks:
-fast

C++ benchmarks:
-fast

Fortran benchmarks:
-fast

Benchmarks using both Fortran and C:
-fast

Peak Compiler Invocation

C benchmarks (except as noted below):
```
/home/cmplr/usr3/alrahate/compilers/ic10.1mainline/20070725/Linux32/bin/icc
-L/home/cmplr/usr3/alrahate/compilers/ic10.1mainline/20070725/Linux32/lib
-I/home/cmplr/usr3/alrahate/compilers/ic10.1mainline/20070725/Linux32/include
```

433.milc: `icc`

C++ benchmarks (except as noted below):
```
icpc
```

450.soplex: `/home/cmplr/usr3/alrahate/compilers/ic10.1mainline/20070725/Linux32/bin/icpc -L/home/cmplr/usr3/alrahate/compilers/ic10.1mainline/20070725/Linux32/lib -I/home/cmplr/usr3/alrahate/compilers/ic10.1mainline/20070725/Linux32/include`

Fortran benchmarks (except as noted below):
```
ifort
```

437.leslie3d: `/home/cmplr/usr3/alrahate/compilers/ic10.1mainline/20070725/Linux32/bin/ifort -L/home/cmplr/usr3/alrahate/compilers/ic10.1mainline/20070725/Linux32/lib -I/home/cmplr/usr3/alrahate/compilers/ic10.1mainline/20070725/Linux32/include`

Benchmarks using both Fortran and C:
```
icc ifort
```

Peak Portability Flags

410.bwaves: `-DSPEC_CPU_LP64`
416.gamess: `-DSPEC_CPU_LP64`
433.milc: `-DSPEC_CPU_LP64`
434.zeusmp: `-DSPEC_CPU_LP64`
435.gromacs: `-DSPEC_CPU_LP64 -nofor_main`
436.cactusADM: `-DSPEC_CPU_LP64 -nofor_main`
444.namd: `-DSPEC_CPU_LP64`
447.dealII: `-DSPEC_CPU_LP64`
453.povray: `-DSPEC_CPU_LP64`
454.calculix: `-DSPEC_CPU_LP64 -nofor_main`
459.GemsFDTD: `-DSPEC_CPU_LP64`
465.tonto: `-DSPEC_CPU_LP64`
481.wrf: `-DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX`

Peak Optimization Flags

C benchmarks:

433.milc: `-prof-gen`(pass 1) `-prof-use`(pass 2) `-fast -fno-alias -auto-ilp32`

Continued on next page

Peak Optimization Flags (Continued)

470.lbm: `-prof-gen`(pass 1) `-prof-use`(pass 2) `-fast -unroll2 -scalar-rep- -prefetch -opt-malloc-options=3`

482.sphinx3: `-fast -unroll2`

C++ benchmarks:

444.namd: `-prof-gen`(pass 1) `-prof-use`(pass 2) `-fast -fno-alias -auto-ilp32`

447.dealII: `-prof-gen`(pass 1) `-prof-use`(pass 2) `-fast -unroll2 -ansi-alias -scalar-rep-`

450.soplex: `-prof-gen`(pass 1) `-prof-use`(pass 2) `-fast -opt-malloc-options=3`

453.povray: `-prof-gen`(pass 1) `-prof-use`(pass 2) `-fast -unroll4 -ansi-alias`

Fortran benchmarks:

410.bwaves: `-fast -prefetch`

416.gamess: `-prof-gen`(pass 1) `-prof-use`(pass 2) `-fast -unroll2 -Ob0 -ansi-alias -scalar-rep-`

434.zeusmp: `-prof-gen`(pass 1) `-prof-use`(pass 2) `-fast`

437.leslie3d: `-prof-gen`(pass 1) `-prof-use`(pass 2) `-fast -prefetch -opt-malloc-options=3`

459.GemsFDTD: `-prof-gen`(pass 1) `-prof-use`(pass 2) `-fast -unroll2 -Ob0 -prefetch`

465.tonto: `-prof-gen`(pass 1) `-prof-use`(pass 2) `-fast -unroll4 -auto`

Benchmarks using both Fortran and C:

435.gromacs: `-prof-gen`(pass 1) `-prof-use`(pass 2) `-fast -prefetch -auto-ilp32`

436.cactusADM: `-prof-gen`(pass 1) `-prof-use`(pass 2) `-fast -unroll2 -prefetch -auto-ilp32`

454.calculix: `-fast -unroll-aggressive -auto-ilp32`

481.wrf: `-fast -auto-ilp32`

The flags file that was used to format this result can be browsed at
`http://www.spec.org/cpu2006/flags/HP-Intel-ic10.1-linux-flags.20090714.01.html`

You can also download the XML flags source by saving the following link:
`http://www.spec.org/cpu2006/flags/HP-Intel-ic10.1-linux-flags.20090714.01.xml`

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.0.
Report generated on Tue Jul 22 12:38:13 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 18 September 2007.