



SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

SPECint®2006 = 17.9

IBM System x3650 (Intel Xeon E5345)

SPECint_base2006 = 15.2

CPU2006 license: 11


Test sponsor: IBM Corporation

Tested by: IBM Corporation

Test date: Sep-2007

Hardware Availability: Feb-2007

Software Availability: Nov-2007

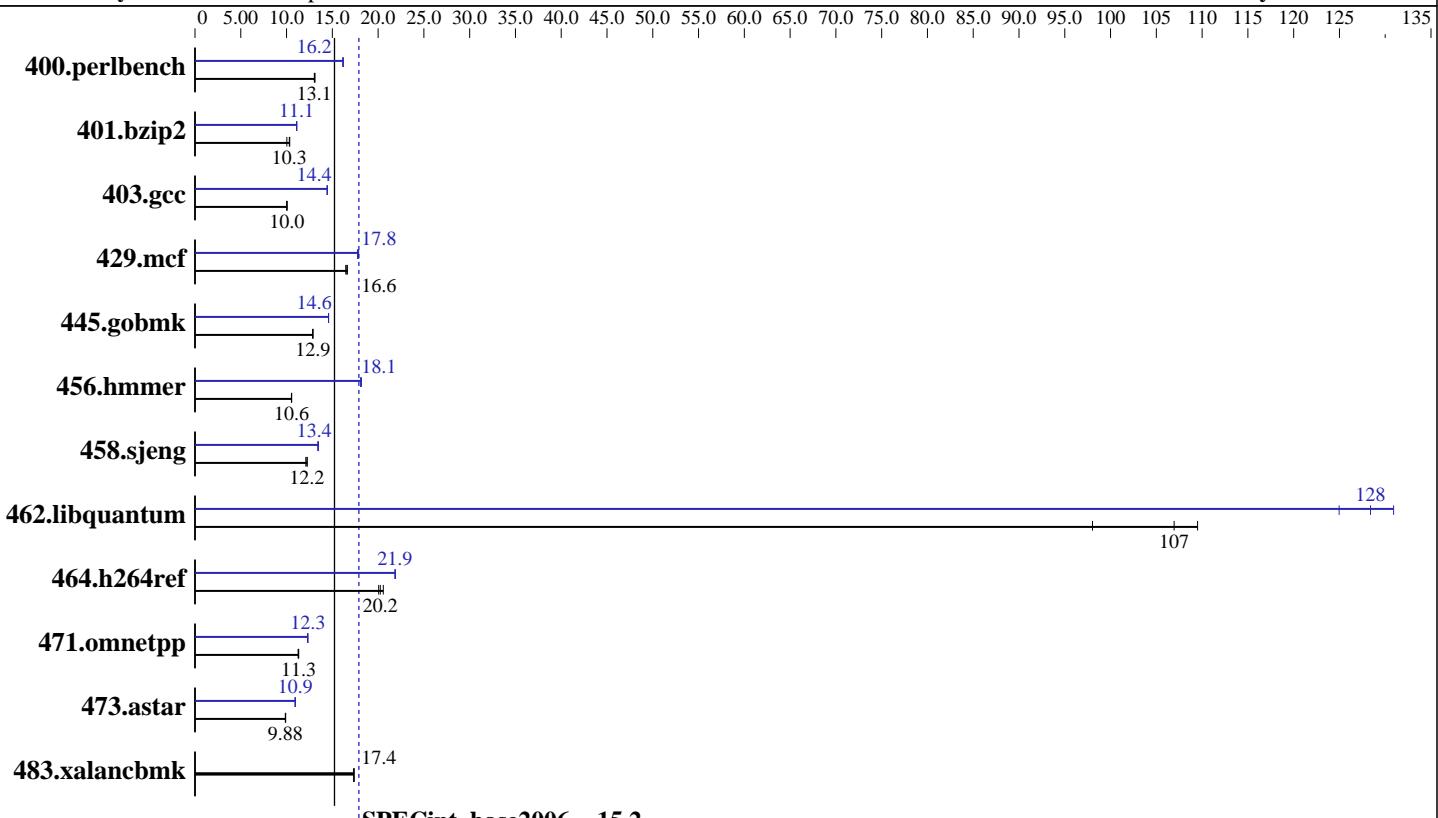

Hardware

CPU Name:	Intel Xeon E5345
CPU Characteristics:	1333MHz system bus
CPU MHz:	2333
FPU:	Integrated
CPU(s) enabled:	8 cores, 2 chips, 4 cores/chip
CPU(s) orderable:	1,2 chips
Primary Cache:	32 KB I + 32 KB D on chip per core
Secondary Cache:	8 MB I+D on chip per chip, 4 MB shared / 2 cores
L3 Cache:	None
Other Cache:	None
Memory:	16 GB (8 x 2GB DRR2-5300F ECC)
Disk Subsystem:	1 x 36 GB SAS, 15000 RPM
Other Hardware:	None

Software

Operating System:	SLES 10 (x86_64), 2.6.16.21-0.8-smp
Compiler:	Intel C++ Compiler for Linux version 10.1 Build 20070824
Auto Parallel:	Yes
File System:	ReiserFS
System State:	Multi-user, run level 3
Base Pointers:	32-bit
Peak Pointers:	32/64-bit
Other Software:	MicroQuill SmartHeap 8.1



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

SPECint2006 = 17.9

IBM System x3650 (Intel Xeon E5345)

SPECint_base2006 = 15.2

CPU2006 license: 11

Test date: Sep-2007

Test sponsor: IBM Corporation

Hardware Availability: Feb-2007

Tested by: IBM Corporation

Software Availability: Nov-2007

Results Table

Benchmark	Base						Peak					
	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	747	13.1	746	13.1	750	13.0	603	16.2	604	16.2	605	16.1
401.bzip2	962	10.0	933	10.3	937	10.3	869	11.1	868	11.1	870	11.1
403.gcc	804	10.0	802	10.0	800	10.1	558	14.4	557	14.4	557	14.4
429.mcf	554	16.5	548	16.6	550	16.6	514	17.7	510	17.9	512	17.8
445.gobmk	815	12.9	815	12.9	815	12.9	719	14.6	719	14.6	719	14.6
456.hammer	884	10.6	886	10.5	884	10.6	514	18.1	514	18.2	516	18.1
458.sjeng	989	12.2	1000	12.1	987	12.3	901	13.4	901	13.4	898	13.5
462.libquantum	211	98.0	194	107	189	110	166	125	158	131	161	128
464.h264ref	1076	20.6	1093	20.2	1103	20.1	1012	21.9	1013	21.8	1011	21.9
471.omnetpp	555	11.3	552	11.3	553	11.3	507	12.3	509	12.3	507	12.3
473.astar	711	9.88	709	9.91	711	9.87	641	10.9	641	11.0	641	10.9
483.xalancbmk	398	17.3	397	17.4	397	17.4	398	17.3	397	17.4	397	17.4

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

General Notes

OMP_NUM_THREADS set to number of cores
KMP_AFFINITY set to physical,0
KMP_STACKSIZE set to 16M

Base Compiler Invocation

C benchmarks:
icc

C++ benchmarks:
icpc

Base Portability Flags

400.perlbench: -DSPEC_CPU_LINUX_IA32
462.libquantum: -DSPEC_CPU_LINUX
483.xalancbmk: -DSPEC_CPU_LINUX

Base Optimization Flags

C benchmarks:
-fast -vec-guard-write -opt-malloc-options=3 -parallel
-par-runtime-control

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

SPECint2006 = 17.9

IBM System x3650 (Intel Xeon E5345)

SPECint_base2006 = 15.2

CPU2006 license: 11

Test date: Sep-2007

Test sponsor: IBM Corporation

Hardware Availability: Feb-2007

Tested by: IBM Corporation

Software Availability: Nov-2007

Base Optimization Flags (Continued)

C++ benchmarks:

```
-xT -ipo -O3 -no-prec-div -Wl,-z,muldefs  
-L/home/cmplr/usr3/alrahate/cpu2006.1.0/lib -lsmartheap
```

Base Other Flags

C benchmarks:

```
403.gcc: -Dalloca=_alloca
```

Peak Compiler Invocation

C benchmarks (except as noted below):

icc

```
401.bzip2: /home/cmplr/usr3/alrahate/compilers/ic10.1mainline/20070824/Linux64/bin/icc  
          -L/home/cmplr/usr3/alrahate/compilers/ic10.1mainline/20070824/Linux64/lib  
          -I/home/cmplr/usr3/alrahate/compilers/ic10.1mainline/20070824/Linux64/include
```

```
456.hmmr: /home/cmplr/usr3/alrahate/compilers/ic10.1mainline/20070824/Linux64/bin/icc  
          -L/home/cmplr/usr3/alrahate/compilers/ic10.1mainline/20070824/Linux64/lib  
          -I/home/cmplr/usr3/alrahate/compilers/ic10.1mainline/20070824/Linux64/include
```

C++ benchmarks:

icpc

Peak Portability Flags

400.perlbench: -DSPEC_CPU_LINUX_IA32

401.bzip2: -DSPEC_CPU_LP64

456.hmmr: -DSPEC_CPU_LP64

462.libquantum: -DSPEC_CPU_LINUX

483.xalancbmk: -DSPEC_CPU_LINUX

Peak Optimization Flags

C benchmarks:

```
400.perlbench: -prof-gen(pass 1) -prof-use(pass 2) -fast -ansi-alias  
              -prefetch
```

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation	SPECint2006 =	17.9
IBM System x3650 (Intel Xeon E5345)	SPECint_base2006 =	15.2
CPU2006 license: 11	Test date:	Sep-2007
Test sponsor: IBM Corporation	Hardware Availability:	Feb-2007
Tested by: IBM Corporation	Software Availability:	Nov-2007

Peak Optimization Flags (Continued)

```
401.bzip2: -prof-gen(pass 1) -prof-use(pass 2) -fast -prefetch
           -auto-ilp32

403.gcc: -fast -inline-calloc -opt-malloc-options=3

429.mcf: -fast -prefetch

445.gobmk: -prof-gen(pass 1) -prof-use(pass 2) -xT -O2 -ipo
            -no-prec-div -ansi-alias

456.hmmr: -fast -unroll2 -ansi-alias -opt-multi-version-aggressive
           -auto-ilp32

458.sjeng: -prof-gen(pass 1) -prof-use(pass 2) -fast -unroll4

462.libquantum: -fast -unroll4 -O0 -prefetch
                 -opt-streaming-stores always -vec-guard-write
                 -opt-malloc-options=3 -parallel -par-runtime-control

464.h264ref: -prof-gen(pass 1) -prof-use(pass 2) -fast -unroll2
              -ansi-alias
```

C++ benchmarks:

```
471.omnetpp: -prof-gen(pass 1) -prof-use(pass 2) -xT -O3 -ipo
              -no-prec-div -ansi-alias -opt-ra-region-strategy=block
              -Wl,-z,muldefs
              -L/home/cmplr/usr3/alrahate/cpu2006.1.0/lib -lsmartheap

473.astar: -prof-gen(pass 1) -prof-use(pass 2) -xT -O3 -ipo
            -no-prec-div -ansi-alias -opt-ra-region-strategy=routine
            -Wl,-z,muldefs
            -L/home/cmplr/usr3/alrahate/cpu2006.1.0/lib -lsmartheap

483.xalancbmk: basepeak = yes
```

Peak Other Flags

C benchmarks:

```
403.gcc: -Dalloca=_alloca
```

The flags file that was used to format this result can be browsed at
<http://www.spec.org/cpu2006/flags/Intel-ic10-ia32-intel64-linux-flags.20090714.28.html>

You can also download the XML flags source by saving the following link:
<http://www.spec.org/cpu2006/flags/Intel-ic10-ia32-intel64-linux-flags.20090714.28.xml>



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

SPECint2006 = 17.9

IBM System x3650 (Intel Xeon E5345)

SPECint_base2006 = 15.2

CPU2006 license: 11

Test date: Sep-2007

Test sponsor: IBM Corporation

Hardware Availability: Feb-2007

Tested by: IBM Corporation

Software Availability: Nov-2007

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.0.

Report generated on Tue Jul 22 14:49:47 2014 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 16 October 2007.