SPEC® CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Sun Microsystems
Sun SPARC Enterprise T5220

SPECfp®_rate2006 = 62.3

SPECfp_rate_base2006 = 57.9

CPU2006 license: 6
Test sponsor: Sun Microsystems
Tested by: Sun Microsystems

Test date: Jul-2007
Hardware Availability: Oct-2007
Software Availability: Sep-2007

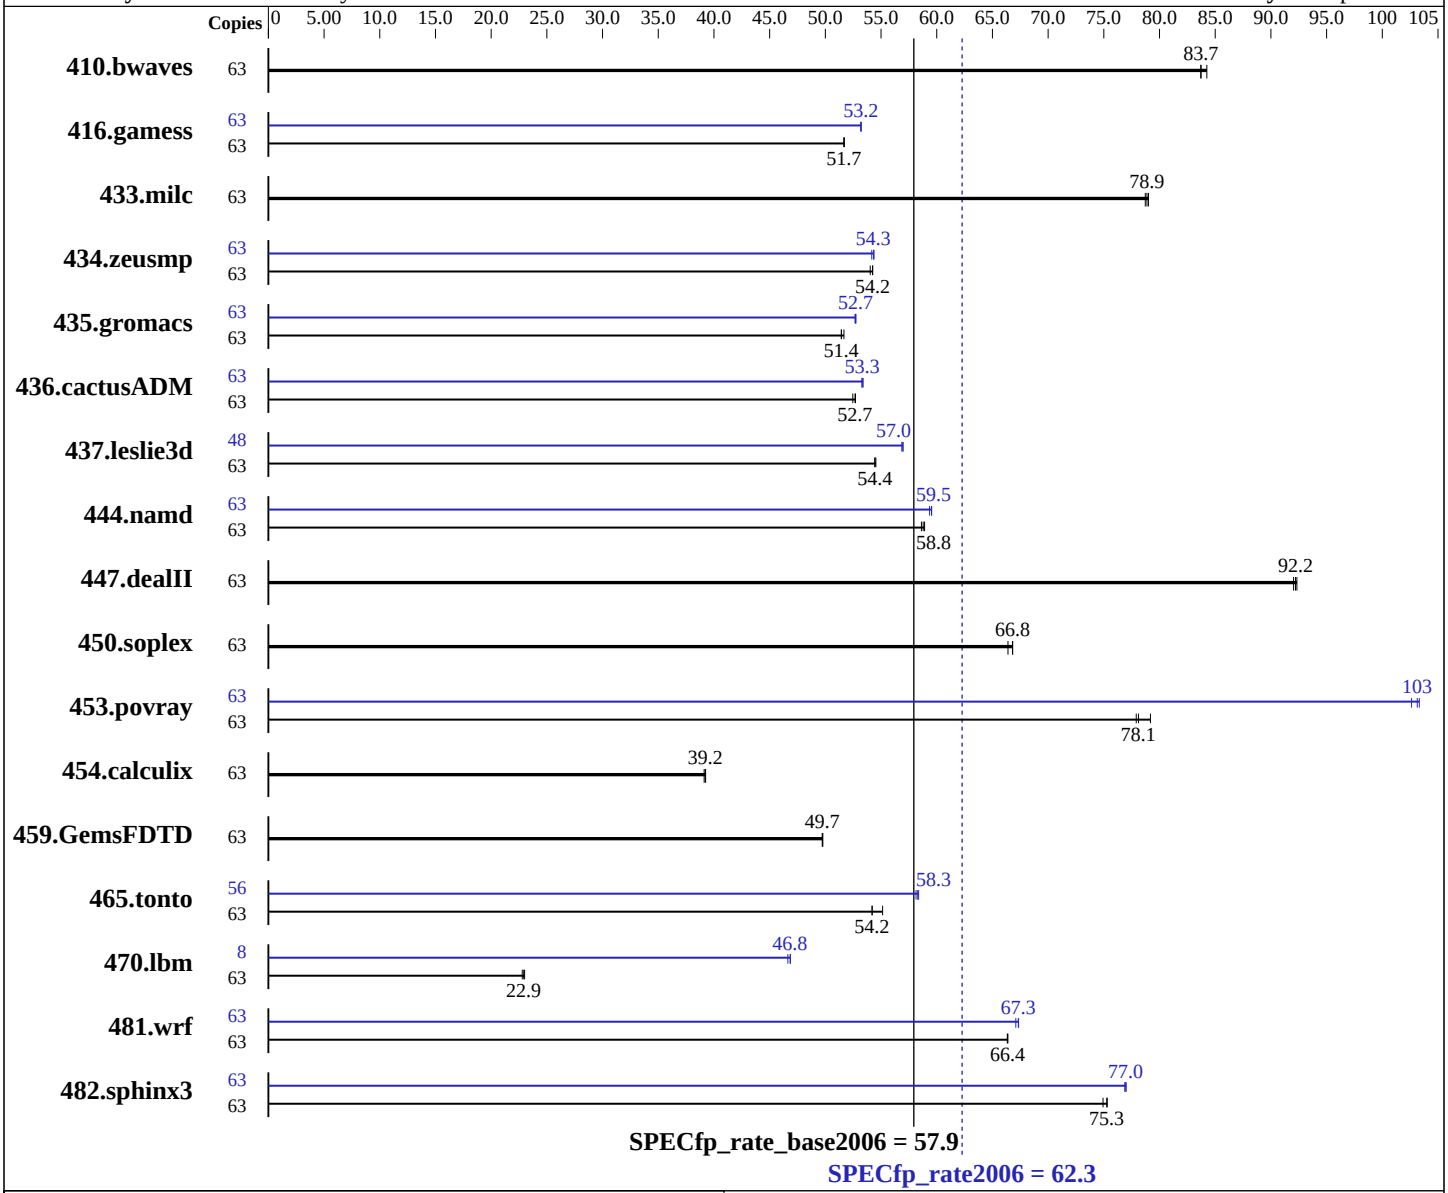

Hardware

CPU Name:	UltraSPARC T2
CPU Characteristics:	
CPU MHz:	1417
FPU:	Integrated
CPU(s) enabled:	8 cores, 1 chip, 8 cores/chip, 8 threads/core
CPU(s) orderable:	1 chip
Primary Cache:	16 KB I + 8 KB D on chip per core
Secondary Cache:	4 MB I+D on chip per chip

Continued on next page

Software

Operating System:	Solaris 10 8/07 (build s10s_u4wos_10)
Compiler:	Sun Studio 12 (build 2007/05/20)
Auto Parallel:	No
File System:	ufs
System State:	Default
Base Pointers:	32-bit
Peak Pointers:	32-bit
Other Software:	None

SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Sun Microsystems
Sun SPARC Enterprise T5220

SPECfp_rate2006 = 62.3

SPECfp_rate_base2006 = 57.9

CPU2006 license: 6
Test sponsor: Sun Microsystems
Tested by: Sun Microsystems

Test date: Jul-2007
Hardware Availability: Oct-2007
Software Availability: Sep-2007

L3 Cache: None
Other Cache: None
Memory: 64 GB (16 x 4 GB)
Disk Subsystem: 275 GB Solaris Volume Manager RAID 0, interlace 384KB, on 5 x SUN72G 10K RPM SAS disks; ufs fragment size 8192 bytes
Other Hardware: None

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	63	10163	84.2	**10226**	**83.7**	10228	83.7	63	10163	84.2	**10226**	**83.7**	10228	83.7
416.gamess	63	23870	51.7	23865	51.7	**23868**	**51.7**	63	23183	53.2	23195	53.2	**23185**	**53.2**
433.milc	63	7347	78.7	7320	79.0	**7333**	**78.9**	63	7347	78.7	7320	79.0	**7333**	**78.9**
434.zeusmp	63	10611	54.0	**10570**	**54.2**	10568	54.3	63	10544	54.4	**10554**	**54.3**	10584	54.2
435.gromacs	63	8746	51.4	**8743**	**51.4**	8706	51.7	63	8527	52.8	8542	52.7	**8534**	**52.7**
436.cactusADM	63	14284	52.7	**14295**	**52.7**	14349	52.5	63	**14122**	**53.3**	14129	53.3	14100	53.4
437.leslie3d	63	10876	54.4	**10876**	**54.4**	10859	54.5	48	7919	57.0	7935	56.9	**7921**	**57.0**
444.namd	63	8577	58.9	8618	58.6	**8596**	**58.8**	63	**8488**	**59.5**	8485	59.5	8512	59.4
447.dealII	63	**7816**	**92.2**	7831	92.0	7806	92.3	63	**7816**	**92.2**	7831	92.0	7806	92.3
450.soplex	63	7913	66.4	**7864**	**66.8**	7864	66.8	63	7913	66.4	**7864**	**66.8**	7864	66.8
453.povray	63	4233	79.2	4302	77.9	**4291**	**78.1**	63	3266	103	**3250**	**103**	3244	103
454.calculix	63	**13251**	**39.2**	13286	39.1	13241	39.3	63	**13251**	**39.2**	13286	39.1	13241	39.3
459.GemsFDTD	63	**13439**	**49.7**	13429	49.8	13443	49.7	63	**13439**	**49.7**	13429	49.8	13443	49.7
465.tonto	63	**11437**	**54.2**	11439	54.2	11242	55.1	56	9439	58.4	9477	58.1	**9453**	**58.3**
470.lbm	63	37983	22.8	37632	23.0	**37763**	**22.9**	8	2345	46.9	**2347**	**46.8**	2357	46.6
481.wrf	63	10601	66.4	**10603**	**66.4**	10608	66.3	63	10449	67.3	10488	67.1	**10453**	**67.3**
482.sphinx3	63	**16315**	**75.3**	16305	75.3	16387	74.9	63	15972	76.9	**15953**	**77.0**	15946	77.0

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Compiler Invocation Notes

```
Compiler patches are available at
http://developers.sun.com/sunstudio/downloads/patches/ss12_patches.jsp
```

Operating System Notes

```
Processes were bound to cores using "submit" and "pbind".

ulimit -s 131072 was used to limit the space
consumed by the stack (and therefore make more
```

Continued on next page

Operating System Notes (Continued)

```
space available to the heap).

 /etc/system parameters
    autoup=600
       Causes pages older than the listed number of seconds to
       be written by fsflush.
    tune_t_fsflushr=10
       Controls how many seconds elapse between runs of the
       page flush daemon, fsflush.

 The "webconsole" service was turned off using
     svcadm disable webconsole
```

Platform Notes

```
This result was measured on a Sun SPARC Enterprise
T5220.  All of these are electronically equivalent:
  - Sun SPARC Enterprise T5120
  - Sun SPARC Enterprise T5220
  - Fujitsu SPARC Enterprise T5120
  - Fujitsu SPARC Enterprise T5220
```

Base Compiler Invocation

C benchmarks:
```
cc
```

C++ benchmarks:
```
CC
```

Fortran benchmarks:
```
f90
```

Benchmarks using both Fortran and C:
```
cc f90
```

Base Optimization Flags

C benchmarks:
```
-g -fast -xipo=2 -xpagesize=4M -xprefetch_level=2 -xalias_level=std
-xprefetch_level=3 -xprefetch_auto_type=indirect_array_access
```

C++ benchmarks:
```
-g0 -library=stlport4 -fast -xipo=2 -xpagesize=4M -xprefetch_level=2
-xdepend -xalias_level=compatible
```

Continued on next page

Base Optimization Flags (Continued)

Fortran benchmarks:
`-g -fast -xipo=2 -xpagesize=4M -xprefetch_level=2`

Benchmarks using both Fortran and C:
`-g -fast`(cc) `-fast`(f90) `-xipo=2 -xpagesize=4M -xprefetch_level=2`
`-xalias_level=std -xprefetch_level=3`
`-xprefetch_auto_type=indirect_array_access`

Base Other Flags

C benchmarks:
`-xjobs=16 -V`

C++ benchmarks:
`-xjobs=16 -verbose=diags,version`

Fortran benchmarks:
`-xjobs=16 -V`

Benchmarks using both Fortran and C:
`-xjobs=16 -V`

Peak Compiler Invocation

C benchmarks:
`cc`

C++ benchmarks:
`CC`

Fortran benchmarks:
`f90`

Benchmarks using both Fortran and C:
`cc f90`

Peak Optimization Flags

C benchmarks:

433.milc: `basepeak = yes`

470.lbm: `-g -xprofile=collect:./feedback`(pass 1)
`-xprofile=use:./feedback`(pass 2) `-fast -xpagesize=4M`
`-xprefetch_level=3 -xipo=2 -xrestrict`

Continued on next page

Peak Optimization Flags (Continued)

482.sphinx3: `-g -xprofile=collect:./feedback`(pass 1)
`-xprofile=use:./feedback`(pass 2) `-fast -xpagesize=4M`
`-xinline= -xprefetch_level=2 -Wc,-Qlp-ol=1 -xrestrict`
`-xalias_level=strong -fsimple=1 -xlinkopt=2 -lfast`

C++ benchmarks:

444.namd: `-g0 -library=stlport4 -xprofile=collect:./feedback`(pass 1)
`-xprofile=use:./feedback`(pass 2) `-fast -xpagesize=4M`
`-xdepend -xalias_level=compatible -xprefetch_level=1`
`-xlinkopt=2`

447.dealII: `basepeak = yes`

450.soplex: `basepeak = yes`

453.povray: `-g0 -library=stlport4 -xprofile=collect:./feedback`(pass 1)
`-xprofile=use:./feedback`(pass 2) `-fast -xpagesize=4M`
`-xdepend -xalias_level=compatible -xipo=2 -xrestrict`
`-xlinkopt=2`

Fortran benchmarks:

410.bwaves: `basepeak = yes`

416.gamess: `-g -xprofile=collect:./feedback`(pass 1)
`-xprofile=use:./feedback`(pass 2) `-fast -xpagesize=4M`
`-xlinkopt=2`

434.zeusmp: `-g -fast -xpagesize=4M -xipo=1 -qoption cg -Qeps:enabled=1`
`-qoption cg -Qeps:ws=8 -lmopt`

437.leslie3d: `-g -fast -xpagesize_heap=4M -xpagesize_stack=64K`
`-xprefetch_level=3 -xprefetch=latx:1.6 -qoption cg -Qlp=1`
`-qoption cg -Qlp-fa=0 -qoption cg -Qlp-fl=1`
`-qoption cg -Qlp-av=448 -qoption cg -Qlp-t=4`

459.GemsFDTD: `basepeak = yes`

465.tonto: `-g -fast -xpagesize=4M -xipo=2 -lfast`

Benchmarks using both Fortran and C:

435.gromacs: `-g -xprofile=collect:./feedback`(pass 1)
`-xprofile=use:./feedback`(pass 2) `-fast`(cc) `-fast`(f90)
`-xpagesize=4M -xipo=1 -xinline= -xarch=generic`
`-xchip=generic -fsimple=0`

Continued on next page

Peak Optimization Flags (Continued)

436.cactusADM: `-g -xprofile=collect:./feedback`(pass 1)
`-xprofile=use:./feedback`(pass 2) `-fast`(cc) `-fast`(f90)
`-xpagesize=4M -xipo=2 -fsimple=1 -xlinkopt=2`

454.calculix: `basepeak = yes`

481.wrf: `-g -xprofile=collect:./feedback`(pass 1)
`-xprofile=use:./feedback`(pass 2) `-fast`(cc) `-fast`(f90)
`-xpagesize=4M -xlinkopt=2`

Peak Other Flags

C benchmarks:
`-xjobs=16 -V`

C++ benchmarks:
`-xjobs=16 -verbose=diags,version`

Fortran benchmarks:
`-xjobs=16 -V`

Benchmarks using both Fortran and C:
`-xjobs=16 -V`

The flags file that was used to format this result can be browsed at
`http://www.spec.org/cpu2006/flags/Sun-Solaris-Studio12.20090714.html`

You can also download the XML flags source by saving the following link:
`http://www.spec.org/cpu2006/flags/Sun-Solaris-Studio12.20090714.xml`

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.0.1.
Report generated on Tue Jul 22 14:16:11 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 30 October 2007.