SPEC® CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

NEC Corporation

Express5800/120Li
(Intel Xeon processor E5345)

SPECfp®_rate2006 = 55.1

SPECfp_rate_base2006 = 53.3

CPU2006 license: 9006
Test sponsor: NEC Corporation
Tested by: NEC Corporation

Test date: Oct-2007
Hardware Availability: Jan-2007
Software Availability: Apr-2007

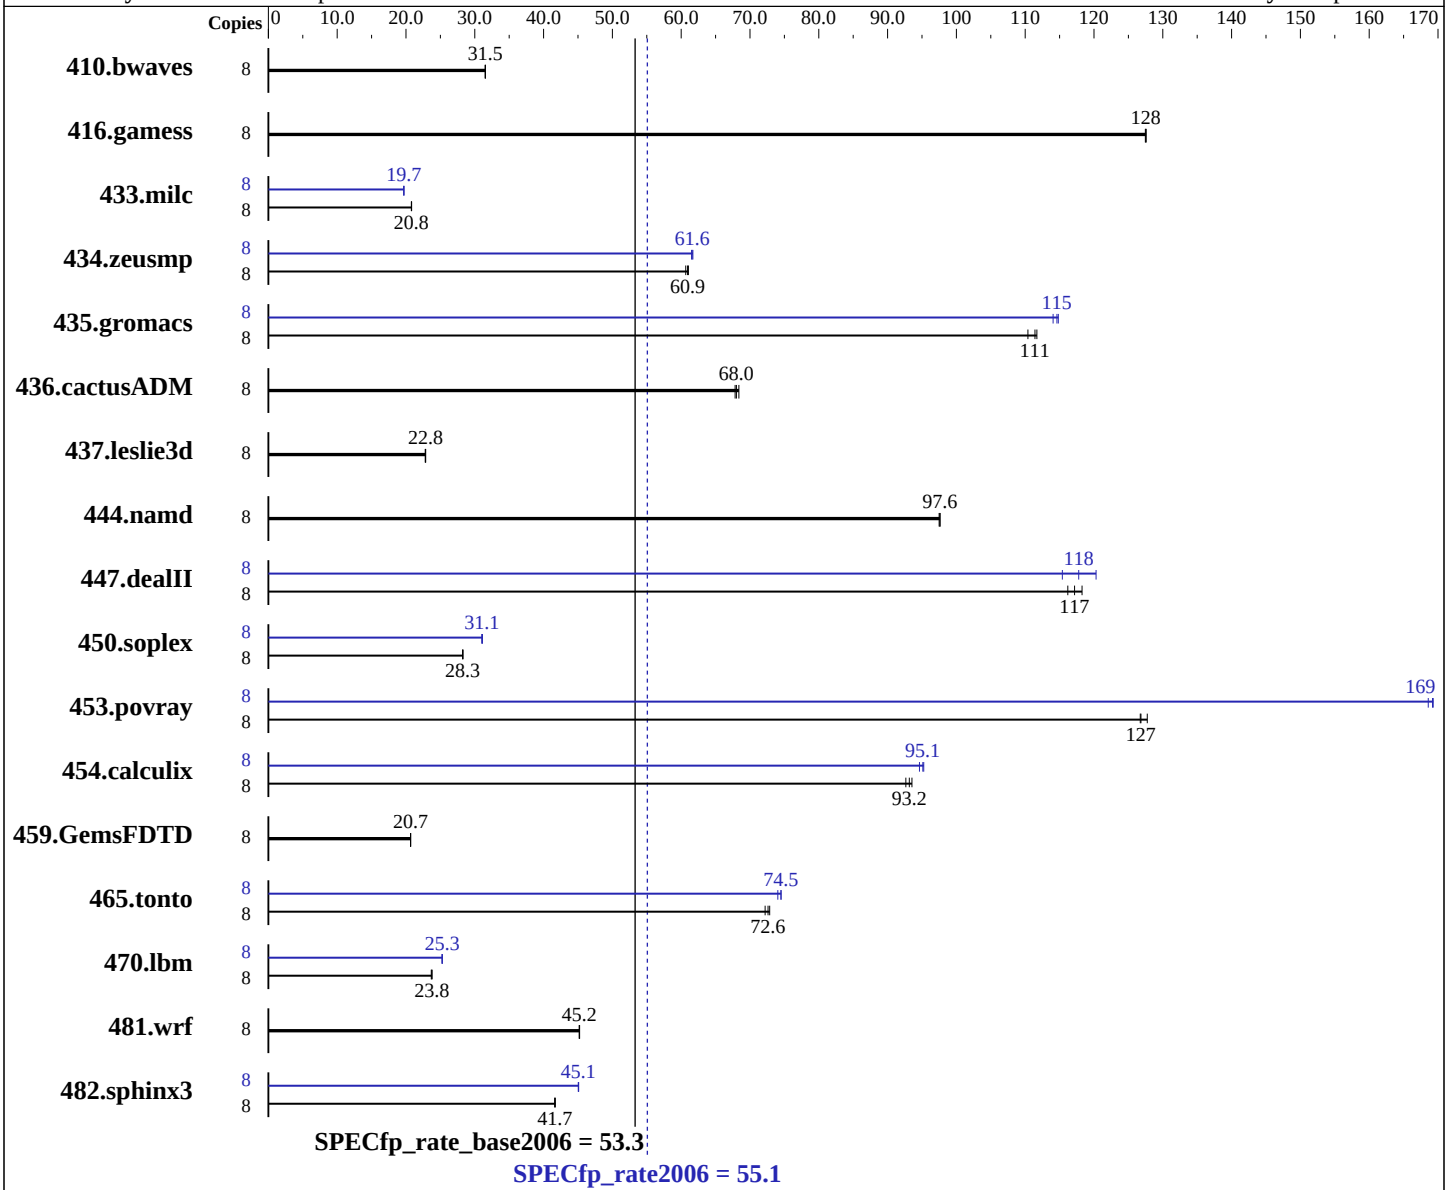

Hardware

CPU Name:	Intel Xeon E5345
CPU Characteristics:	2.33 GHz, 2x4 MB L2 shared, 1333 MHz bus
CPU MHz:	2333
FPU:	Integrated
CPU(s) enabled:	8 cores, 2 chips, 4 cores/chip
CPU(s) orderable:	1,2 chips
Primary Cache:	32 KB I + 32 KB D on chip per core
Secondary Cache:	8 MB I+D on chip per chip, 4 MB shared / 2 cores

Continued on next page

Software

Operating System:	64-Bit SUSE LINUX Enterprise Server 10, Kernel 2.6.16.21-0.8-smp on an x86_64
Compiler:	Intel C++ Compiler for IA32/EM64T application, Version 9.1 - Build 20070320, Package-ID: l_cc_c_9.1.049 Intel Fortran Compiler for IA32/EM64T application, Version 9.1 - Build 20070320, Package ID: l_fc_c_9.1.045
Auto Parallel:	No
File System:	ext2

Continued on next page

SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

NEC Corporation

Express5800/120Li
(Intel Xeon processor E5345)

SPECfp_rate2006 = 55.1

SPECfp_rate_base2006 = 53.3

CPU2006 license: 9006
Test sponsor: NEC Corporation
Tested by: NEC Corporation

Test date: Oct-2007
Hardware Availability: Jan-2007
Software Availability: Apr-2007

L3 Cache: None
Other Cache: None
Memory: 16 GB (8x2 GB PC2-5300F, 2 rank, CL5-5-5, ECC)
Disk Subsystem: 1x73.2 GB SAS, 15000RPM
Other Hardware: None

System State: Multiuser, Runlevel 3
Base Pointers: 64-bit
Peak Pointers: 32/64-bit
Other Software: None

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	8	3446	31.5	**3448**	**31.5**	3449	31.5	8	3446	31.5	**3448**	**31.5**	3449	31.5
416.gamess	8	**1228**	**128**	1228	128	1229	127	8	**1228**	**128**	1228	128	1229	127
433.milc	8	3534	20.8	3527	20.8	**3531**	**20.8**	8	3729	19.7	**3730**	**19.7**	3731	19.7
434.zeusmp	8	1200	60.7	1192	61.0	**1195**	**60.9**	8	1180	61.7	1184	61.5	**1182**	**61.6**
435.gromacs	8	511	112	**513**	**111**	517	110	8	497	115	**498**	**115**	501	114
436.cactusADM	8	**1405**	**68.0**	1398	68.4	1409	67.8	8	**1405**	**68.0**	1398	68.4	1409	67.8
437.leslie3d	8	3289	22.9	3299	22.8	**3292**	**22.8**	8	3289	22.9	3299	22.8	**3292**	**22.8**
444.namd	8	657	97.6	**657**	**97.6**	658	97.5	8	657	97.6	**657**	**97.6**	658	97.5
447.dealII	8	788	116	774	118	**781**	**117**	8	761	120	**777**	**118**	793	115
450.soplex	8	**2361**	**28.3**	2362	28.2	2360	28.3	8	2144	31.1	**2148**	**31.1**	2150	31.0
453.povray	8	336	127	333	128	**336**	**127**	8	**252**	**169**	252	169	251	169
454.calculix	8	706	93.5	**708**	**93.2**	712	92.7	8	693	95.3	697	94.6	**694**	**95.1**
459.GemsFDTD	8	4108	20.7	**4105**	**20.7**	4105	20.7	8	4108	20.7	**4105**	**20.7**	4105	20.7
465.tonto	8	**1084**	**72.6**	1080	72.9	1090	72.2	8	1056	74.5	1063	74.0	**1057**	**74.5**
470.lbm	8	**4624**	**23.8**	4643	23.7	4624	23.8	8	4351	25.3	**4351**	**25.3**	4351	25.3
481.wrf	8	1975	45.2	**1977**	**45.2**	1977	45.2	8	1975	45.2	**1977**	**45.2**	1977	45.2
482.sphinx3	8	3739	41.7	**3743**	**41.7**	3747	41.6	8	3457	45.1	3462	45.0	**3459**	**45.1**

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Operating System Notes

```
'ulimit -s unlimited' was used to set the stacksize to unlimited prior to run
'/usr/bin/taskset' used to bind processes to CPUs
```

General Notes

```
The system bus runs at 1333 MHz
All binaries were built with 64-bit Intel compiler except:
433.milc, 434.zeusmp, 450.soplex, 470.lbm and 482.sphinx3 in peak were built with
32-bit Intel compiler by changing the path for include and library files.
```

Base Compiler Invocation

C benchmarks:
icc

C++ benchmarks:
icpc

Fortran benchmarks:
ifort

Benchmarks using both Fortran and C:
icc ifort

Base Portability Flags

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
450.soplex: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64

Base Optimization Flags

C benchmarks:
-fast

C++ benchmarks:
-fast

Fortran benchmarks:
-fast

Benchmarks using both Fortran and C:
-fast

Peak Compiler Invocation

C benchmarks:
`/opt/intel/cc/9.1.049/bin/icc -I/opt/intel/cc/9.1.049/include -L/opt/intel/cc/9.1.049/lib`

C++ benchmarks (except as noted below):
`icpc`

450.soplex: `/opt/intel/cc/9.1.049/bin/icpc -I/opt/intel/cc/9.1.049/include -L/opt/intel/cc/9.1.049/lib`

Fortran benchmarks (except as noted below):
`ifort`

434.zeusmp: `/opt/intel/fc/9.1.045/bin/ifort -I/opt/intel/fc/9.1.045/include -L/opt/intel/fc/9.1.045/lib`

Benchmarks using both Fortran and C:
`icc ifort`

Peak Portability Flags

410.bwaves: `-DSPEC_CPU_LP64`
416.gamess: `-DSPEC_CPU_LP64`
435.gromacs: `-DSPEC_CPU_LP64 -nofor_main`
436.cactusADM: `-DSPEC_CPU_LP64 -nofor_main`
437.leslie3d: `-DSPEC_CPU_LP64`
444.namd: `-DSPEC_CPU_LP64`
447.dealII: `-DSPEC_CPU_LP64`
453.povray: `-DSPEC_CPU_LP64`
454.calculix: `-DSPEC_CPU_LP64 -nofor_main`
459.GemsFDTD: `-DSPEC_CPU_LP64`
465.tonto: `-DSPEC_CPU_LP64`
481.wrf: `-DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX`

Peak Optimization Flags

C benchmarks:

433.milc: `-prof_gen`(pass 1) `-prof_use`(pass 2) `-fast`

470.lbm: `Same as 433.milc`

482.sphinx3: `-fast`

C++ benchmarks:

Continued on next page

Peak Optimization Flags (Continued)

444.namd: `basepeak = yes`

447.dealII: `-prof_gen`(pass 1) `-prof_use`(pass 2) `-fast`

450.soplex: `Same as 447.dealII`

453.povray: `Same as 447.dealII`

Fortran benchmarks:

410.bwaves: `basepeak = yes`

416.gamess: `basepeak = yes`

434.zeusmp: `-fast`

437.leslie3d: `basepeak = yes`

459.GemsFDTD: `basepeak = yes`

465.tonto: `-prof_gen`(pass 1) `-prof_use`(pass 2) `-fast`

Benchmarks using both Fortran and C:

435.gromacs: `-prof_gen`(pass 1) `-prof_use`(pass 2) `-fast`

436.cactusADM: `basepeak = yes`

454.calculix: `Same as 435.gromacs`

481.wrf: `basepeak = yes`

The flags file that was used to format this result can be browsed at
`http://www.spec.org/cpu2006/flags/NEC-ic91-linux-flags.html`

You can also download the XML flags source by saving the following link:
`http://www.spec.org/cpu2006/flags/NEC-ic91-linux-flags.xml`

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.0.
Report generated on Tue Jul 22 14:11:02 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 30 October 2007.