SPEC® CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge R900 (Intel Xeon E7220, 2.93 GHz)

SPECfp®_rate2006 = 89.8

SPECfp_rate_base2006 = 83.2

CPU2006 license: 55
Test sponsor: Dell Inc.
Tested by: Dell Inc.

Test date: Oct-2007
Hardware Availability: Nov-2007
Software Availability: Nov-2007

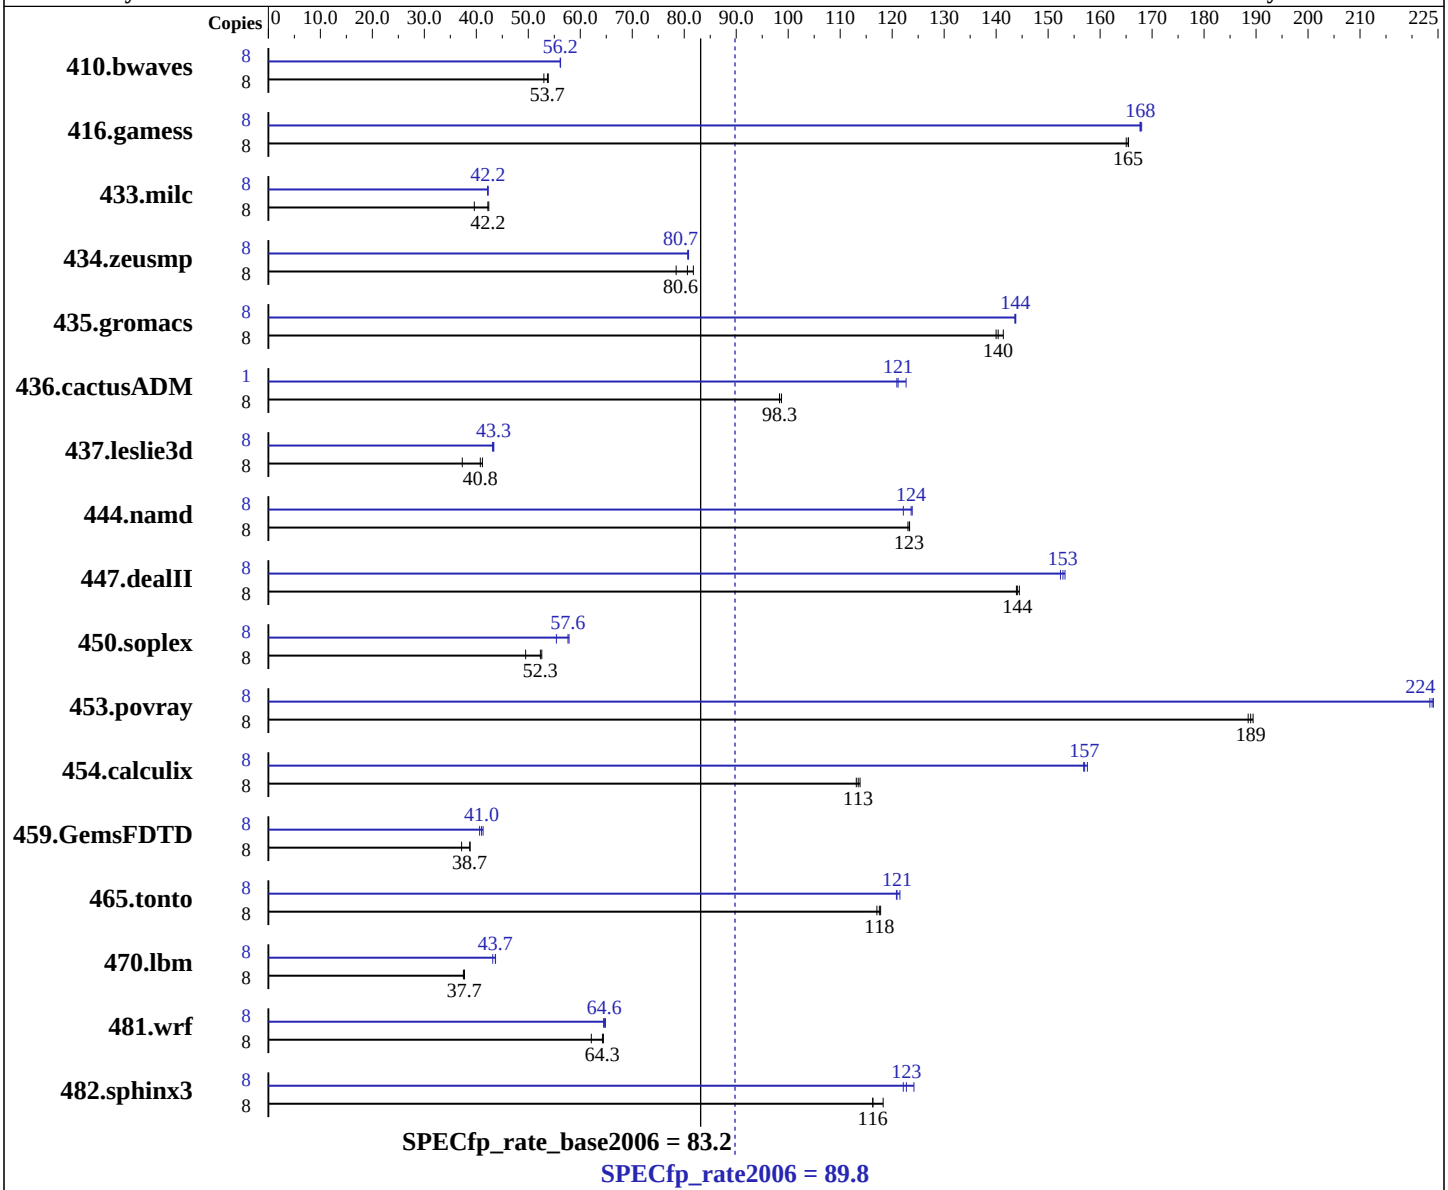

Hardware

CPU Name:	Intel Xeon E7220
CPU Characteristics:	1066 MHz system bus
CPU MHz:	2933
FPU:	Integrated
CPU(s) enabled:	8 cores, 4 chips, 2 cores/chip
CPU(s) orderable:	2,4 chips
Primary Cache:	32 KB I + 32 KB D on chip per core
Secondary Cache:	4 MB I+D on chip per core

Continued on next page

Software

Operating System:	64-Bit SUSE LINUX Enterprise Server 10 SP1
Compiler:	Intel C++ and Fortran Compiler for Linux32 and Linux64 version 10.1 Build 20070725
Auto Parallel:	Yes
File System:	ReiserFS
System State:	Multi-user, run level 3
Base Pointers:	64-bit
Peak Pointers:	32/64-bit

Continued on next page

SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge R900 (Intel Xeon E7220, 2.93 GHz)

SPECfp_rate2006 = 89.8

SPECfp_rate_base2006 = 83.2

CPU2006 license: 55
Test sponsor: Dell Inc.
Tested by: Dell Inc.

Test date: Oct-2007
Hardware Availability: Nov-2007
Software Availability: Nov-2007

L3 Cache: None
Other Cache: None
Memory: 16 GB (16 x 1GB 667 MHz ECC CL5 FB-DIMM)
Disk Subsystem: 1 x 73 GB SAS 15K RPM
Other Hardware: None

Other Software: None

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	8	2051	53.0	**2025**	**53.7**	2019	53.8	8	1934	56.2	1937	56.1	**1935**	**56.2**
416.gamess	8	947	165	949	165	**947**	**165**	8	934	168	932	168	**934**	**168**
433.milc	8	1854	39.6	**1739**	**42.2**	1732	42.4	8	1741	42.2	1738	42.3	**1738**	**42.2**
434.zeusmp	8	928	78.4	890	81.8	**903**	**80.6**	8	902	80.7	**902**	**80.7**	901	80.8
435.gromacs	8	**407**	**140**	404	141	408	140	8	398	144	**397**	**144**	397	144
436.cactusADM	8	972	98.3	**972**	**98.3**	968	98.7	1	**98.6**	**121**	98.8	121	97.4	123
437.leslie3d	8	2016	37.3	**1845**	**40.8**	1826	41.2	8	1734	43.4	1745	43.1	**1736**	**43.3**
444.namd	8	521	123	**520**	**123**	520	123	8	**519**	**124**	518	124	525	122
447.dealII	8	636	144	**635**	**144**	634	144	8	597	153	601	152	**599**	**153**
450.soplex	8	1348	49.5	**1275**	**52.3**	1269	52.6	8	1204	55.4	**1158**	**57.6**	1154	57.8
453.povray	8	226	188	**225**	**189**	225	189	8	190	223	**190**	**224**	190	224
454.calculix	8	584	113	**582**	**113**	580	114	8	419	158	**420**	**157**	421	157
459.GemsFDTD	8	2284	37.2	2187	38.8	**2192**	**38.7**	8	2055	41.3	2089	40.6	**2070**	**41.0**
465.tonto	8	**670**	**118**	672	117	668	118	8	652	121	**651**	**121**	648	121
470.lbm	8	2930	37.5	2915	37.7	**2916**	**37.7**	8	2547	43.2	2515	43.7	**2517**	**43.7**
481.wrf	8	1438	62.1	**1391**	**64.3**	1387	64.4	8	1378	64.8	**1382**	**64.6**	1386	64.5
482.sphinx3	8	1318	118	1341	116	**1341**	**116**	8	1277	122	1256	124	**1270**	**123**

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Operating System Notes

'ulimit -s unlimited' was used to set the stacksize to unlimited prior to run
'/usr/bin/taskset' used to bind processes to CPUs

Platform Notes

BIOS Settings:
Adjacent Cache Line Prefetch = Disabled (default Enabled)
Hardware Prefetcher = Disabled (default Enabled)

Base Compiler Invocation

C benchmarks:
icc

C++ benchmarks:
icpc

Fortran benchmarks:
ifort

Benchmarks using both Fortran and C:
icc ifort

Base Portability Flags

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
450.soplex: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64

Base Optimization Flags

C benchmarks:
-fast

C++ benchmarks:
-fast

Fortran benchmarks:
-fast

Benchmarks using both Fortran and C:
-fast

Peak Compiler Invocation

C benchmarks (except as noted below):
```
/home/cmplr/usr3/alrahate/compilers/ic10.1mainline/20070725/Linux32/bin/icc
-L/home/cmplr/usr3/alrahate/compilers/ic10.1mainline/20070725/Linux32/lib
-I/home/cmplr/usr3/alrahate/compilers/ic10.1mainline/20070725/Linux32/include
```

433.milc: `icc`

C++ benchmarks (except as noted below):
```
icpc
```

450.soplex: `/home/cmplr/usr3/alrahate/compilers/ic10.1mainline/20070725/Linux32/bin/icpc -L/home/cmplr/usr3/alrahate/compilers/ic10.1mainline/20070725/Linux32/lib -I/home/cmplr/usr3/alrahate/compilers/ic10.1mainline/20070725/Linux32/include`

Fortran benchmarks (except as noted below):
```
ifort
```

437.leslie3d: `/home/cmplr/usr3/alrahate/compilers/ic10.1mainline/20070725/Linux32/bin/ifort -L/home/cmplr/usr3/alrahate/compilers/ic10.1mainline/20070725/Linux32/lib -I/home/cmplr/usr3/alrahate/compilers/ic10.1mainline/20070725/Linux32/include`

Benchmarks using both Fortran and C:
```
icc ifort
```

Peak Portability Flags

410.bwaves: `-DSPEC_CPU_LP64`
416.gamess: `-DSPEC_CPU_LP64`
433.milc: `-DSPEC_CPU_LP64`
434.zeusmp: `-DSPEC_CPU_LP64`
435.gromacs: `-DSPEC_CPU_LP64 -nofor_main`
436.cactusADM: `-DSPEC_CPU_LP64 -nofor_main`
444.namd: `-DSPEC_CPU_LP64`
447.dealII: `-DSPEC_CPU_LP64`
453.povray: `-DSPEC_CPU_LP64`
454.calculix: `-DSPEC_CPU_LP64 -nofor_main`
459.GemsFDTD: `-DSPEC_CPU_LP64`
465.tonto: `-DSPEC_CPU_LP64`
481.wrf: `-DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX`

Peak Optimization Flags

C benchmarks:

433.milc: `-prof-gen`(pass 1) `-prof-use`(pass 2) `-fast -fno-alias -auto-ilp32`

Continued on next page

Peak Optimization Flags (Continued)

470.lbm: `-prof-gen`(pass 1) `-prof-use`(pass 2) `-fast -unroll2 -scalar-rep- -prefetch -opt-malloc-options=3`

482.sphinx3: `-fast -unroll2`

C++ benchmarks:

444.namd: `-prof-gen`(pass 1) `-prof-use`(pass 2) `-fast -fno-alias -auto-ilp32`

447.dealII: `-prof-gen`(pass 1) `-prof-use`(pass 2) `-fast -unroll2 -ansi-alias -scalar-rep-`

450.soplex: `-prof-gen`(pass 1) `-prof-use`(pass 2) `-fast -opt-malloc-options=3`

453.povray: `-prof-gen`(pass 1) `-prof-use`(pass 2) `-fast -unroll4 -ansi-alias`

Fortran benchmarks:

410.bwaves: `-fast -prefetch`

416.gamess: `-prof-gen`(pass 1) `-prof-use`(pass 2) `-fast -unroll2 -Ob0 -ansi-alias -scalar-rep-`

434.zeusmp: `-prof-gen`(pass 1) `-prof-use`(pass 2) `-fast`

437.leslie3d: `-prof-gen`(pass 1) `-prof-use`(pass 2) `-fast -prefetch -opt-malloc-options=3`

459.GemsFDTD: `-prof-gen`(pass 1) `-prof-use`(pass 2) `-fast -unroll2 -Ob0 -prefetch`

465.tonto: `-prof-gen`(pass 1) `-prof-use`(pass 2) `-fast -unroll4 -auto`

Benchmarks using both Fortran and C:

435.gromacs: `-prof-gen`(pass 1) `-prof-use`(pass 2) `-fast -prefetch -auto-ilp32`

436.cactusADM: `-prof-gen`(pass 1) `-prof-use`(pass 2) `-fast -unroll2 -prefetch -parallel -auto-ilp32`

454.calculix: `-fast -unroll-aggressive -auto-ilp32`

481.wrf: `-fast -auto-ilp32`

The flags file that was used to format this result can be browsed at
http://www.spec.org/cpu2006/flags/Intel-ic10.1-FP-intel64-linux-flags.20090714.22.html

You can also download the XML flags source by saving the following link:
http://www.spec.org/cpu2006/flags/Intel-ic10.1-FP-intel64-linux-flags.20090714.22.xml

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.0.
Report generated on Tue Jul 22 14:41:49 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 13 November 2007.