SPEC® CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

NEC Corporation

Express5800/110Rh-1
(Intel Xeon processor 3040)

SPECfp®_rate2006 = 20.3

SPECfp_rate_base2006 = 19.8

CPU2006 license: 9006
Test sponsor: NEC Corporation
Tested by: NEC Corporation

Test date: Nov-2007
Hardware Availability: Nov-2006
Software Availability: Apr-2007

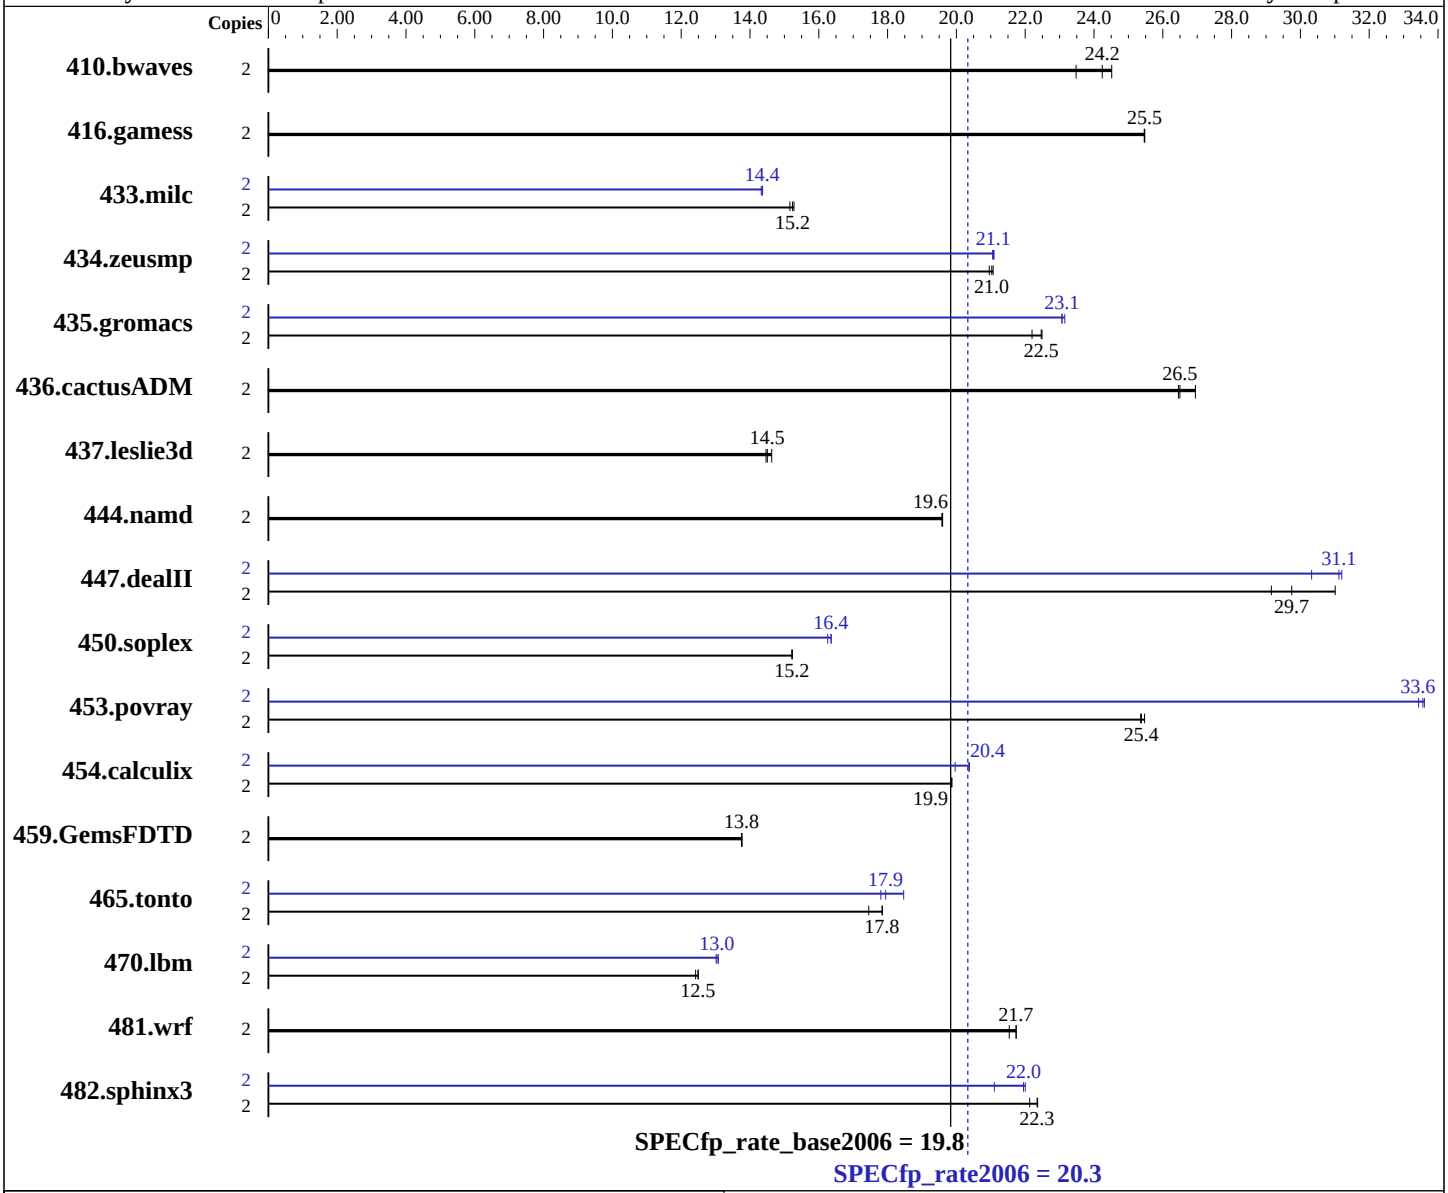

Hardware

CPU Name:	Intel Xeon 3040
CPU Characteristics:	1.86 GHz, 2 MB L2, 1066 MHz bus
CPU MHz:	1866
FPU:	Integrated
CPU(s) enabled:	2 cores, 1 chip, 2 cores/chip
CPU(s) orderable:	1 chip
Primary Cache:	32 KB I + 32 KB D on chip per core
Secondary Cache:	2 MB I+D on chip per chip

Continued on next page

Software

Operating System:	SUSE Linux Enterprise Server 10 (x86_64), Kernel 2.6.16.21-0.8-smp
Compiler:	Intel C++ Compiler for IA32/EM64T application, Version 9.1 - Build 20070320, Package-ID: l_cc_c_9.1.049 Intel Fortran Compiler for IA32/EM64T application, Version 9.1 - Build 20070320, Package ID: l_fc_c_9.1.045
Auto Parallel:	No
File System:	ext2

Continued on next page

SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

NEC Corporation

Express5800/110Rh-1
(Intel Xeon processor 3040)

SPECfp_rate2006 = 20.3

SPECfp_rate_base2006 = 19.8

CPU2006 license: 9006
Test sponsor: NEC Corporation
Tested by: NEC Corporation

Test date: Nov-2007
Hardware Availability: Nov-2006
Software Availability: Apr-2007

L3 Cache: None
Other Cache: None
Memory: 4 GB (4x1 GB PC2-5300E, 2 rank, CL5-5-5, ECC)
Disk Subsystem: 1x80 GB SATAII, 7200RPM
Other Hardware: None

System State: Multiuser, Runlevel 3
Base Pointers: 64-bit
Peak Pointers: 32/64-bit
Other Software: None

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	2	1158	23.5	1109	24.5	**1121**	**24.2**	2	1158	23.5	1109	24.5	**1121**	**24.2**
416.gamess	2	1537	25.5	**1537**	**25.5**	1538	25.5	2	1537	25.5	**1537**	**25.5**	1538	25.5
433.milc	2	1211	15.2	1202	15.3	**1205**	**15.2**	2	1282	14.3	1278	14.4	**1279**	**14.4**
434.zeusmp	2	869	21.0	864	21.1	**865**	**21.0**	2	**864**	**21.1**	863	21.1	865	21.1
435.gromacs	2	635	22.5	**636**	**22.5**	643	22.2	2	619	23.1	617	23.2	**619**	**23.1**
436.cactusADM	2	**902**	**26.5**	903	26.5	887	26.9	2	**902**	**26.5**	903	26.5	887	26.9
437.leslie3d	2	1300	14.5	**1296**	**14.5**	1285	14.6	2	1300	14.5	**1296**	**14.5**	1285	14.6
444.namd	2	**819**	**19.6**	818	19.6	819	19.6	2	**819**	**19.6**	818	19.6	819	19.6
447.dealII	2	**769**	**29.7**	738	31.0	785	29.2	2	754	30.3	733	31.2	**735**	**31.1**
450.soplex	2	1096	15.2	**1096**	**15.2**	1095	15.2	2	1026	16.3	**1020**	**16.4**	1020	16.4
453.povray	2	418	25.5	**419**	**25.4**	420	25.4	2	**317**	**33.6**	317	33.6	318	33.4
454.calculix	2	**831**	**19.9**	830	19.9	831	19.8	2	827	20.0	**810**	**20.4**	810	20.4
459.GemsFDTD	2	1541	13.8	**1542**	**13.8**	1543	13.8	2	1541	13.8	**1542**	**13.8**	1543	13.8
465.tonto	2	1128	17.5	**1103**	**17.8**	1103	17.8	2	**1097**	**17.9**	1105	17.8	1066	18.5
470.lbm	2	2213	12.4	**2200**	**12.5**	2199	12.5	2	2111	13.0	**2107**	**13.0**	2101	13.1
481.wrf	2	1037	21.5	**1028**	**21.7**	1028	21.7	2	1037	21.5	**1028**	**21.7**	1028	21.7
482.sphinx3	2	1761	22.1	**1744**	**22.3**	1743	22.4	2	**1776**	**22.0**	1847	21.1	1772	22.0

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Operating System Notes

```
'ulimit -s unlimited' was used to set the stacksize to unlimited prior to run
'/usr/bin/taskset' used to bind processes to CPUs
```

General Notes

```
The system bus runs at 1066 MHz
All binaries were built with 64-bit Intel compiler except:
433.milc, 434.zeusmp, 450.soplex, 470.lbm and 482.sphinx3 in peak were built with
32-bit Intel compiler by changing the path for include and library files.
```

Base Compiler Invocation

C benchmarks:
icc

C++ benchmarks:
icpc

Fortran benchmarks:
ifort

Benchmarks using both Fortran and C:
icc ifort

Base Portability Flags

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
450.soplex: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64

Base Optimization Flags

C benchmarks:
-fast

C++ benchmarks:
-fast

Fortran benchmarks:
-fast

Benchmarks using both Fortran and C:
-fast

Peak Compiler Invocation

C benchmarks:
`/opt/intel/cc/9.1.049/bin/icc -I/opt/intel/cc/9.1.049/include -L/opt/intel/cc/9.1.049/lib`

C++ benchmarks (except as noted below):
`icpc`

450.soplex: `/opt/intel/cc/9.1.049/bin/icpc -I/opt/intel/cc/9.1.049/include -L/opt/intel/cc/9.1.049/lib`

Fortran benchmarks (except as noted below):
`ifort`

434.zeusmp: `/opt/intel/fc/9.1.045/bin/ifort -I/opt/intel/fc/9.1.045/include -L/opt/intel/fc/9.1.045/lib`

Benchmarks using both Fortran and C:
`icc ifort`

Peak Portability Flags

410.bwaves: `-DSPEC_CPU_LP64`
416.gamess: `-DSPEC_CPU_LP64`
435.gromacs: `-DSPEC_CPU_LP64 -nofor_main`
436.cactusADM: `-DSPEC_CPU_LP64 -nofor_main`
437.leslie3d: `-DSPEC_CPU_LP64`
444.namd: `-DSPEC_CPU_LP64`
447.dealII: `-DSPEC_CPU_LP64`
453.povray: `-DSPEC_CPU_LP64`
454.calculix: `-DSPEC_CPU_LP64 -nofor_main`
459.GemsFDTD: `-DSPEC_CPU_LP64`
465.tonto: `-DSPEC_CPU_LP64`
481.wrf: `-DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX`

Peak Optimization Flags

C benchmarks:

433.milc: `-prof_gen`(pass 1) `-prof_use`(pass 2) `-fast`

470.lbm: `Same as 433.milc`

482.sphinx3: `-fast`

C++ benchmarks:

Continued on next page

Peak Optimization Flags (Continued)

444.namd: `basepeak = yes`

447.dealII: `-prof_gen`(pass 1) `-prof_use`(pass 2) `-fast`

450.soplex: `Same as 447.dealII`

453.povray: `Same as 447.dealII`

Fortran benchmarks:

410.bwaves: `basepeak = yes`

416.gamess: `basepeak = yes`

434.zeusmp: `-fast`

437.leslie3d: `basepeak = yes`

459.GemsFDTD: `basepeak = yes`

465.tonto: `-prof_gen`(pass 1) `-prof_use`(pass 2) `-fast`

Benchmarks using both Fortran and C:

435.gromacs: `-prof_gen`(pass 1) `-prof_use`(pass 2) `-fast`

436.cactusADM: `basepeak = yes`

454.calculix: `Same as 435.gromacs`

481.wrf: `basepeak = yes`

The flags file that was used to format this result can be browsed at
`http://www.spec.org/cpu2006/flags/NEC-ic91-FP-linux-flags.html`

You can also download the XML flags source by saving the following link:
`http://www.spec.org/cpu2006/flags/NEC-ic91-FP-linux-flags.xml`

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.0.
Report generated on Tue Jul 22 13:49:21 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 11 December 2007.