SPEC® CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

NEC Corporation

Express5800/140Re-4
(Intel Xeon processor 7110M)

SPECfp®_rate2006 = 43.9

SPECfp_rate_base2006 = 42.8

CPU2006 license: 9006
Test sponsor: NEC Corporation
Tested by: NEC Corporation

Test date: Nov-2007
Hardware Availability: Oct-2006
Software Availability: Apr-2007

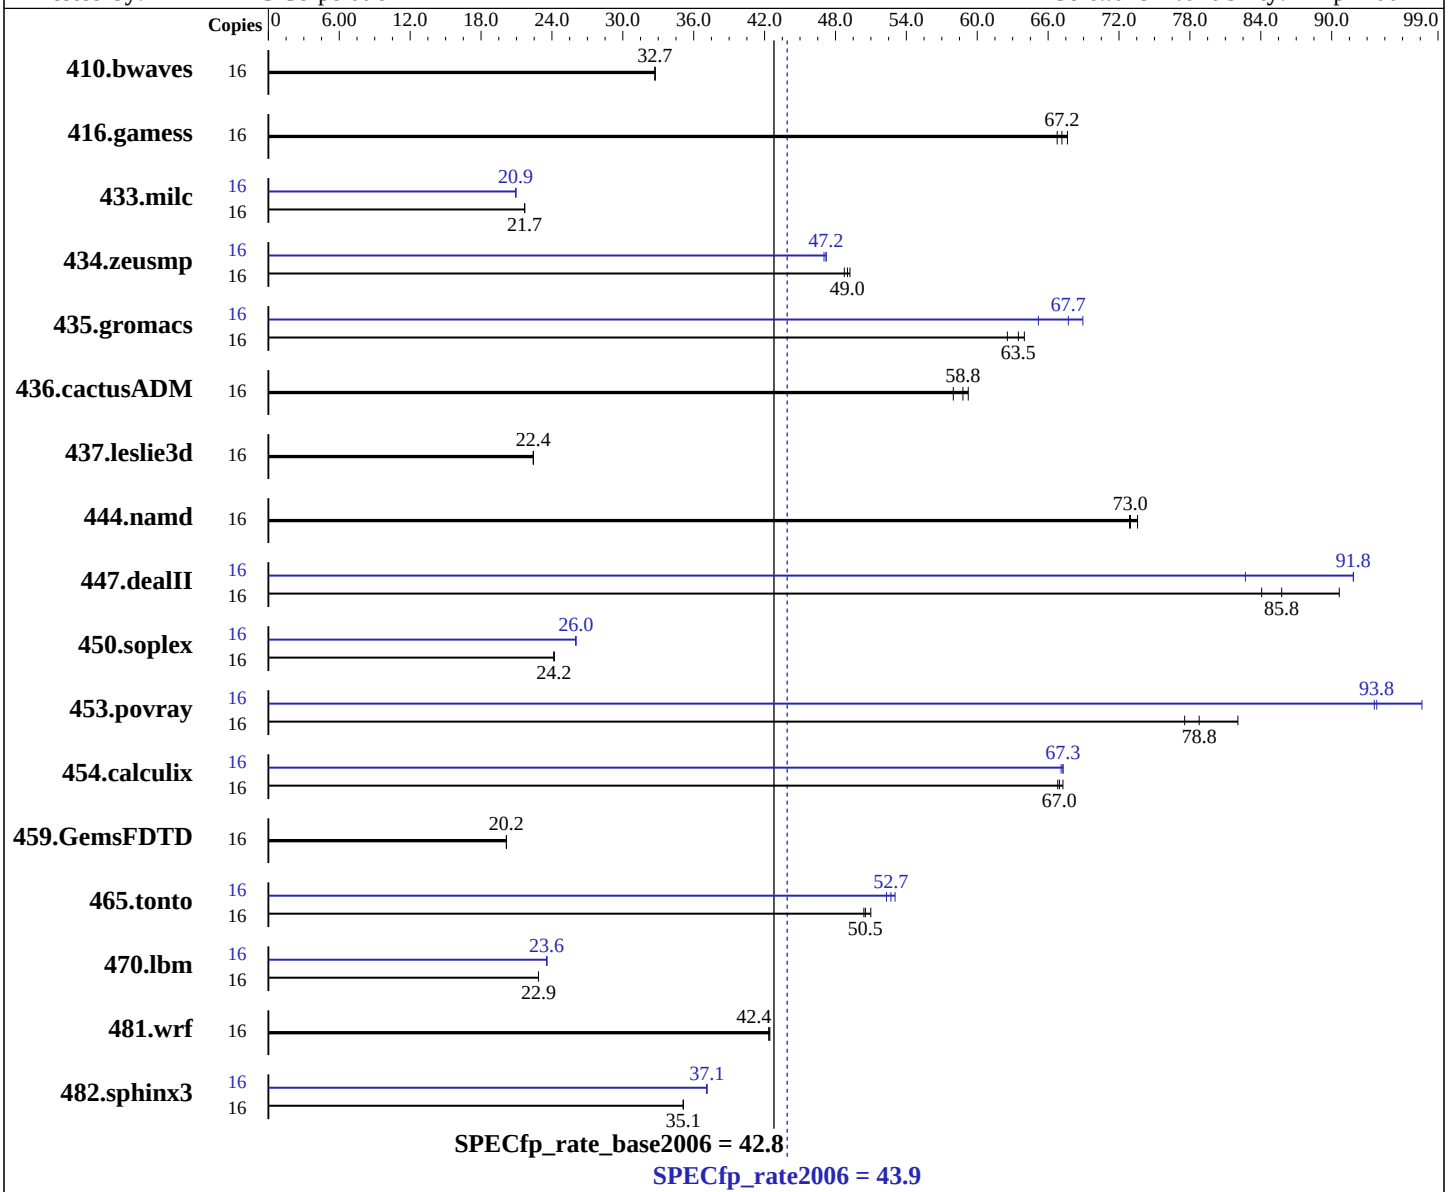

Hardware

CPU Name:	Intel Xeon 7110M
CPU Characteristics:	2.60 GHz, 800 MHz bus
CPU MHz:	2600
FPU:	Integrated
CPU(s) enabled:	8 cores, 4 chips, 2 cores/chip, 2 threads/core
CPU(s) orderable:	1,2,4 chips
Primary Cache:	12 K micro-ops I + 16 KB D on chip per core
Secondary Cache:	1 MB I+D on chip per core

Continued on next page

Software

Operating System:	SUSE Linux Enterprise Server 10 (x86_64), Kernel 2.6.16.21-0.8-smp
Compiler:	Intel C++ Compiler for IA32/EM64T application, Version 9.1 - Build 20070320, Package-ID: l_cc_c_9.1.049 Intel Fortran Compiler for IA32/EM64T application, Version 9.1 - Build 20070320, Package ID: l_fc_c_9.1.045
Auto Parallel:	No
File System:	ext2

Continued on next page

SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

NEC Corporation

Express5800/140Re-4
(Intel Xeon processor 7110M)

SPECfp_rate2006 = 43.9

SPECfp_rate_base2006 = 42.8

CPU2006 license: 9006
Test sponsor: NEC Corporation
Tested by: NEC Corporation

Test date: Nov-2007
Hardware Availability: Oct-2006
Software Availability: Apr-2007

L3 Cache: 4 MB I+D on chip per chip
Other Cache: None
Memory: 32 GB (16x2 GB PC2-3200R, 2 rank, CL3-3-3, ECC)
Disk Subsystem: 1x146.5 GB SAS, 15000RPM
Other Hardware: None

System State: Multiuser, Runlevel 3
Base Pointers: 64-bit
Peak Pointers: 32/64-bit
Other Software: None

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	16	**6643**	**32.7**	6646	32.7	6641	32.7	16	**6643**	**32.7**	6646	32.7	6641	32.7
416.gamess	16	4692	66.8	4632	67.6	**4664**	**67.2**	16	4692	66.8	4632	67.6	**4664**	**67.2**
433.milc	16	6770	21.7	**6770**	**21.7**	6775	21.7	16	7015	20.9	**7014**	**20.9**	7012	20.9
434.zeusmp	16	**2971**	**49.0**	2958	49.2	2987	48.7	16	3084	47.2	3096	47.0	**3084**	**47.2**
435.gromacs	16	1826	62.5	1785	64.0	**1800**	**63.5**	16	1753	65.2	**1687**	**67.7**	1657	68.9
436.cactusADM	16	3298	58.0	**3252**	**58.8**	3228	59.2	16	3298	58.0	**3252**	**58.8**	3228	59.2
437.leslie3d	16	6704	22.4	**6706**	**22.4**	6706	22.4	16	6704	22.4	**6706**	**22.4**	6706	22.4
444.namd	16	**1759**	**73.0**	1760	72.9	1744	73.6	16	**1759**	**73.0**	1760	72.9	1744	73.6
447.dealII	16	2177	84.1	**2134**	**85.8**	2019	90.6	16	1993	91.8	2213	82.7	**1993**	**91.8**
450.soplex	16	**5518**	**24.2**	5523	24.2	5516	24.2	16	5130	26.0	**5127**	**26.0**	5126	26.0
453.povray	16	**1080**	**78.8**	1098	77.6	1037	82.1	16	909	93.6	**907**	**93.8**	872	97.6
454.calculix	16	**1971**	**67.0**	1976	66.8	1963	67.3	16	1967	67.1	**1963**	**67.3**	1962	67.3
459.GemsFDTD	16	8423	20.2	8427	20.1	**8425**	**20.2**	16	8423	20.2	8427	20.1	**8425**	**20.2**
465.tonto	16	3088	51.0	**3115**	**50.5**	3123	50.4	16	2968	53.0	**2988**	**52.7**	3009	52.3
470.lbm	16	**9615**	**22.9**	9616	22.9	9614	22.9	16	**9329**	**23.6**	9330	23.6	9327	23.6
481.wrf	16	4210	42.4	4219	42.4	**4217**	**42.4**	16	4210	42.4	4219	42.4	**4217**	**42.4**
482.sphinx3	16	**8879**	**35.1**	8876	35.1	8882	35.1	16	8400	37.1	**8401**	**37.1**	8405	37.1

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Operating System Notes

```
'ulimit -s unlimited' was used to set the stacksize to unlimited prior to run
'/usr/bin/taskset' used to bind processes to CPUs
```

General Notes

```
The system bus runs at 800 MHz
All binaries were built with 64-bit Intel compiler except:
433.milc, 434.zeusmp, 450.soplex, 470.lbm and 482.sphinx3 in peak were built with
32-bit Intel compiler by changing the path for include and library files.

The Express5800/140Hf and the Express5800/140Re-4 models are
electronically equivalent.
The results have been measured on a Express5800/140Re-4 model.
```

Base Compiler Invocation

C benchmarks:
icc

C++ benchmarks:
icpc

Fortran benchmarks:
ifort

Benchmarks using both Fortran and C:
icc ifort

Base Portability Flags

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
450.soplex: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64

Base Optimization Flags

C benchmarks:
-fast

C++ benchmarks:
-fast

Fortran benchmarks:
-fast

Benchmarks using both Fortran and C:
-fast

Peak Compiler Invocation

C benchmarks:
`/opt/intel/cc/9.1.049/bin/icc -I/opt/intel/cc/9.1.049/include -L/opt/intel/cc/9.1.049/lib`

C++ benchmarks (except as noted below):
`icpc`

450.soplex: `/opt/intel/cc/9.1.049/bin/icpc -I/opt/intel/cc/9.1.049/include -L/opt/intel/cc/9.1.049/lib`

Fortran benchmarks (except as noted below):
`ifort`

434.zeusmp: `/opt/intel/fc/9.1.045/bin/ifort -I/opt/intel/fc/9.1.045/include -L/opt/intel/fc/9.1.045/lib`

Benchmarks using both Fortran and C:
`icc ifort`

Peak Portability Flags

410.bwaves: `-DSPEC_CPU_LP64`
416.gamess: `-DSPEC_CPU_LP64`
435.gromacs: `-DSPEC_CPU_LP64 -nofor_main`
436.cactusADM: `-DSPEC_CPU_LP64 -nofor_main`
437.leslie3d: `-DSPEC_CPU_LP64`
444.namd: `-DSPEC_CPU_LP64`
447.dealII: `-DSPEC_CPU_LP64`
453.povray: `-DSPEC_CPU_LP64`
454.calculix: `-DSPEC_CPU_LP64 -nofor_main`
459.GemsFDTD: `-DSPEC_CPU_LP64`
465.tonto: `-DSPEC_CPU_LP64`
481.wrf: `-DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX`

Peak Optimization Flags

C benchmarks:

433.milc: `-prof_gen`(pass 1) `-prof_use`(pass 2) `-fast`

470.lbm: `Same as 433.milc`

482.sphinx3: `-fast`

C++ benchmarks:

Continued on next page

Peak Optimization Flags (Continued)

444.namd: `basepeak = yes`

447.dealII: `-prof_gen`(pass 1) `-prof_use`(pass 2) `-fast`

450.soplex: `Same as 447.dealII`

453.povray: `Same as 447.dealII`

Fortran benchmarks:

410.bwaves: `basepeak = yes`

416.gamess: `basepeak = yes`

434.zeusmp: `-fast`

437.leslie3d: `basepeak = yes`

459.GemsFDTD: `basepeak = yes`

465.tonto: `-prof_gen`(pass 1) `-prof_use`(pass 2) `-fast`

Benchmarks using both Fortran and C:

435.gromacs: `-prof_gen`(pass 1) `-prof_use`(pass 2) `-fast`

436.cactusADM: `basepeak = yes`

454.calculix: `Same as 435.gromacs`

481.wrf: `basepeak = yes`

The flags file that was used to format this result can be browsed at
`http://www.spec.org/cpu2006/flags/NEC-ic91-FP-linux-flags.html`

You can also download the XML flags source by saving the following link:
`http://www.spec.org/cpu2006/flags/NEC-ic91-FP-linux-flags.xml`

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.0.
Report generated on Tue Jul 22 13:46:12 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 11 December 2007.