SPEC® CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge R200 (Intel Xeon 3075, 2.66 GHz)

SPECfp®_rate2006 = 30.0

SPECfp_rate_base2006 = 28.4

CPU2006 license: 55
Test sponsor: Dell Inc.
Tested by: Dell Inc.

Test date: Nov-2007
Hardware Availability: Nov-2007
Software Availability: Nov-2007

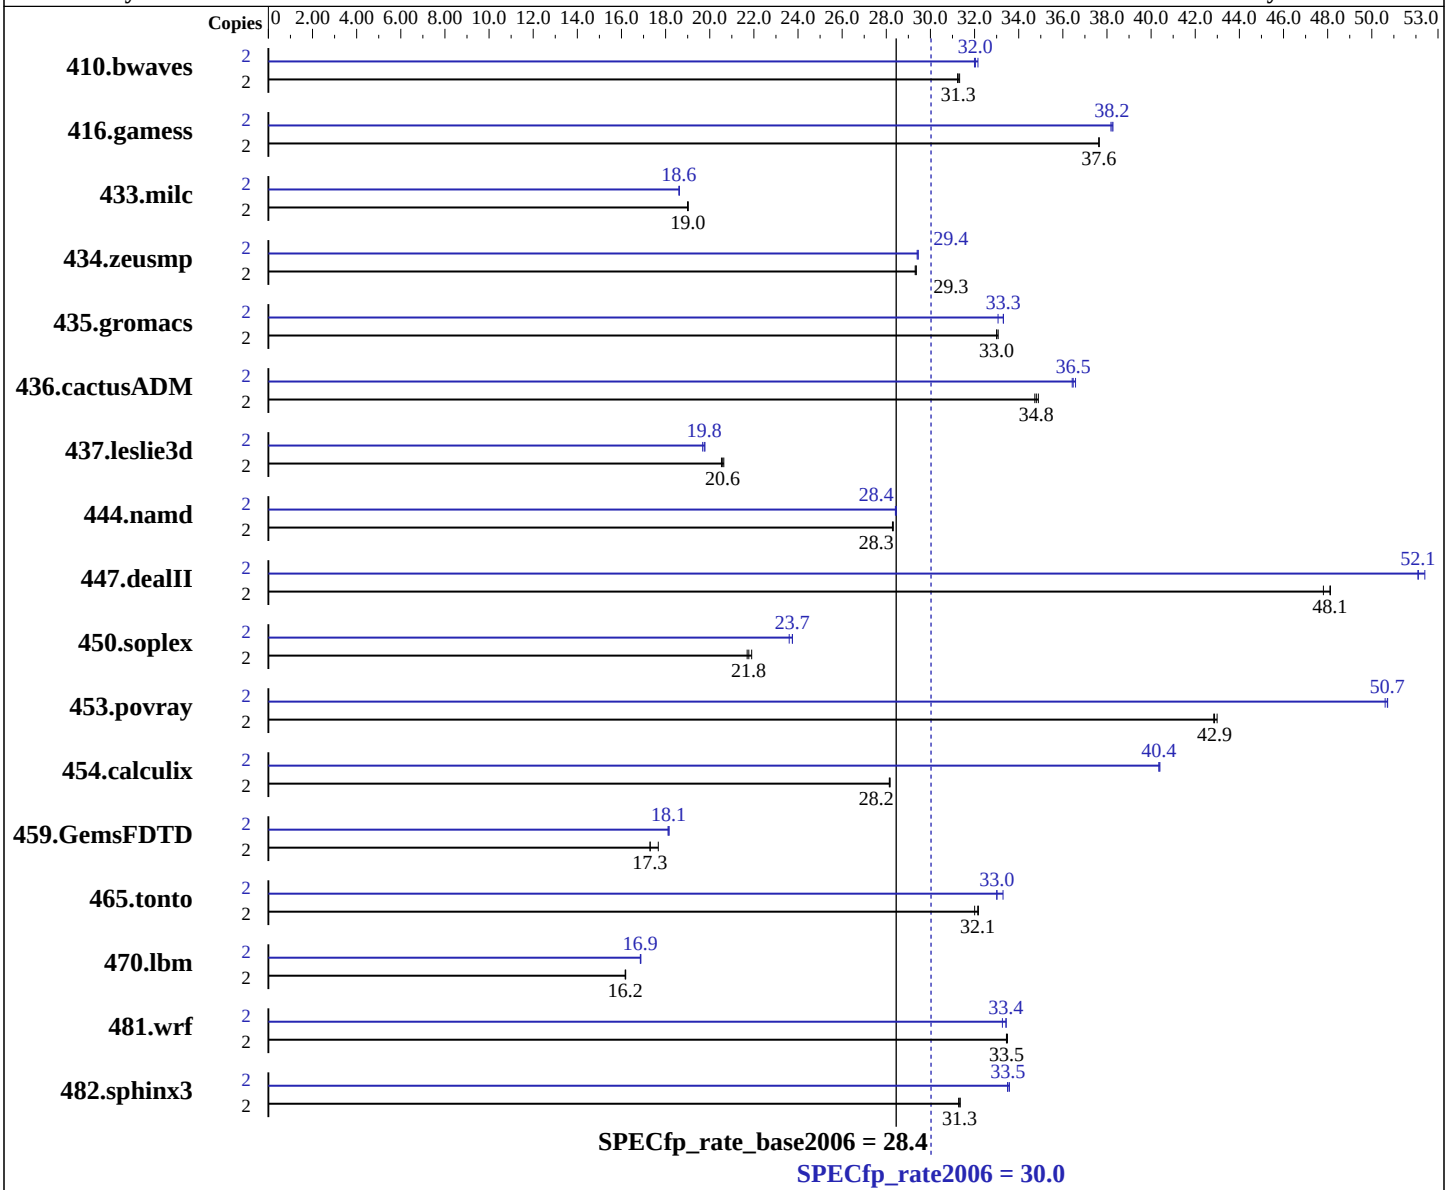

Hardware

CPU Name:	Intel Xeon 3075
CPU Characteristics:	1333 MHz system bus
CPU MHz:	2666
FPU:	Integrated
CPU(s) enabled:	2 cores, 1 chip, 2 cores/chip
CPU(s) orderable:	1 chip
Primary Cache:	32 KB I + 32 KB D on chip per core
Secondary Cache:	4 MB I+D on chip per chip

Continued on next page

Software

Operating System:	SUSE Linux Enterprise Server 10 (x86_64) SP1, Kernel 2.6.16.46-0.12-smp
Compiler:	Intel C++ and Fortran Compiler for Linux32 and Linux64 version 10.1 Build 20070725
Auto Parallel:	No
File System:	ReiserFS
System State:	Multi-user, run level 3
Base Pointers:	64-bit

Continued on next page

SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge R200 (Intel Xeon 3075, 2.66 GHz)

SPECfp_rate2006 = 30.0

SPECfp_rate_base2006 = 28.4

CPU2006 license: 55
Test sponsor: Dell Inc.
Tested by: Dell Inc.

Test date: Nov-2007
Hardware Availability: Nov-2007
Software Availability: Nov-2007

L3 Cache: None
Other Cache: None
Memory: 8 GB (4 x 2GB 800MHz DDR2)
Disk Subsystem: 73GB SAS, 10K RPM
Other Hardware: None

Peak Pointers: 32/64-bit
Other Software: None

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	2	870	31.2	868	31.3	**870**	**31.3**	2	845	32.2	849	32.0	**848**	**32.0**
416.gamess	2	1040	37.6	**1040**	**37.6**	1040	37.6	2	**1024**	**38.2**	1026	38.2	1023	38.3
433.milc	2	965	19.0	**966**	**19.0**	967	19.0	2	986	18.6	**986**	**18.6**	987	18.6
434.zeusmp	2	621	29.3	**620**	**29.3**	620	29.4	2	618	29.4	619	29.4	**618**	**29.4**
435.gromacs	2	**433**	**33.0**	433	33.0	432	33.1	2	**429**	**33.3**	429	33.3	432	33.1
436.cactusADM	2	688	34.7	**687**	**34.8**	685	34.9	2	653	36.6	**655**	**36.5**	656	36.4
437.leslie3d	2	916	20.5	911	20.6	**913**	**20.6**	2	950	19.8	955	19.7	**952**	**19.8**
444.namd	2	**567**	**28.3**	567	28.3	567	28.3	2	**564**	**28.4**	564	28.4	565	28.4
447.dealII	2	479	47.8	**476**	**48.1**	475	48.1	2	**439**	**52.1**	437	52.4	439	52.1
450.soplex	2	762	21.9	**766**	**21.8**	769	21.7	2	707	23.6	702	23.7	**702**	**23.7**
453.povray	2	248	42.8	247	43.0	**248**	**42.9**	2	**210**	**50.7**	210	50.6	210	50.7
454.calculix	2	586	28.1	586	28.2	**586**	**28.2**	2	408	40.4	409	40.4	**409**	**40.4**
459.GemsFDTD	2	1227	17.3	**1227**	**17.3**	1201	17.7	2	1172	18.1	**1170**	**18.1**	1169	18.2
465.tonto	2	612	32.2	615	32.0	**612**	**32.1**	2	596	33.0	**596**	**33.0**	591	33.3
470.lbm	2	1697	16.2	**1699**	**16.2**	1699	16.2	2	1628	16.9	**1630**	**16.9**	1630	16.9
481.wrf	2	668	33.4	**668**	**33.5**	667	33.5	2	**668**	**33.4**	668	33.4	672	33.3
482.sphinx3	2	1243	31.3	1246	31.3	**1244**	**31.3**	2	1161	33.6	**1163**	**33.5**	1164	33.5

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

General Notes

```
taskset used to bind processes to cores
```

Base Compiler Invocation

C benchmarks:
`icc`

C++ benchmarks:
`icpc`

Fortran benchmarks:
`ifort`

Continued on next page

Base Compiler Invocation (Continued)

Benchmarks using both Fortran and C:
icc ifort

Base Portability Flags

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
450.soplex: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64

Base Optimization Flags

C benchmarks:
-fast

C++ benchmarks:
-fast

Fortran benchmarks:
-fast

Benchmarks using both Fortran and C:
-fast

Peak Compiler Invocation

C benchmarks (except as noted below):
/home/cmplr/usr3/alrahate/compilers/ic10.1mainline/20070725/Linux32/bin/icc
-L/home/cmplr/usr3/alrahate/compilers/ic10.1mainline/20070725/Linux32/lib
-I/home/cmplr/usr3/alrahate/compilers/ic10.1mainline/20070725/Linux32/include

Continued on next page

Peak Compiler Invocation (Continued)

433.milc: icc

C++ benchmarks (except as noted below):
icpc

450.soplex: /home/cmplr/usr3/alrahate/compilers/ic10.1mainline/20070725/Linux32/bin/icpc
-L/home/cmplr/usr3/alrahate/compilers/ic10.1mainline/20070725/Linux32/lib
-I/home/cmplr/usr3/alrahate/compilers/ic10.1mainline/20070725/Linux32/include

Fortran benchmarks (except as noted below):
ifort

437.leslie3d: /home/cmplr/usr3/alrahate/compilers/ic10.1mainline/20070725/Linux32/bin/ifort
-L/home/cmplr/usr3/alrahate/compilers/ic10.1mainline/20070725/Linux32/lib
-I/home/cmplr/usr3/alrahate/compilers/ic10.1mainline/20070725/Linux32/include

Benchmarks using both Fortran and C:
icc ifort

Peak Portability Flags

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX

Peak Optimization Flags

C benchmarks:

433.milc: -prof-gen(pass 1) -prof-use(pass 2) -fast -fno-alias
-auto-ilp32

470.lbm: -prof-gen(pass 1) -prof-use(pass 2) -fast -unroll2
-scalar-rep- -prefetch -opt-malloc-options=3

Continued on next page

Peak Optimization Flags (Continued)

482.sphinx3: `-fast -unroll2`

C++ benchmarks:

444.namd: `-prof-gen`(pass 1) `-prof-use`(pass 2) `-fast -fno-alias -auto-ilp32`

447.dealII: `-prof-gen`(pass 1) `-prof-use`(pass 2) `-fast -unroll2 -ansi-alias -scalar-rep-`

450.soplex: `-prof-gen`(pass 1) `-prof-use`(pass 2) `-fast -opt-malloc-options=3`

453.povray: `-prof-gen`(pass 1) `-prof-use`(pass 2) `-fast -unroll4 -ansi-alias`

Fortran benchmarks:

410.bwaves: `-fast -prefetch`

416.gamess: `-prof-gen`(pass 1) `-prof-use`(pass 2) `-fast -unroll2 -Ob0 -ansi-alias -scalar-rep-`

434.zeusmp: `-prof-gen`(pass 1) `-prof-use`(pass 2) `-fast`

437.leslie3d: `-prof-gen`(pass 1) `-prof-use`(pass 2) `-fast -prefetch -opt-malloc-options=3`

459.GemsFDTD: `-prof-gen`(pass 1) `-prof-use`(pass 2) `-fast -unroll2 -Ob0 -prefetch`

465.tonto: `-prof-gen`(pass 1) `-prof-use`(pass 2) `-fast -unroll4 -auto`

Benchmarks using both Fortran and C:

435.gromacs: `-prof-gen`(pass 1) `-prof-use`(pass 2) `-fast -prefetch -auto-ilp32`

436.cactusADM: `-prof-gen`(pass 1) `-prof-use`(pass 2) `-fast -unroll2 -prefetch -auto-ilp32`

454.calculix: `-fast -unroll-aggressive -auto-ilp32`

481.wrf: `-fast -auto-ilp32`

The flags file that was used to format this result can be browsed at
`http://www.spec.org/cpu2006/flags/Intel-ic10.1-FP-intel64-linux-flags.20090714.22.html`

You can also download the XML flags source by saving the following link:
`http://www.spec.org/cpu2006/flags/Intel-ic10.1-FP-intel64-linux-flags.20090714.22.xml`

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.0.
Report generated on Tue Jul 22 15:00:53 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 26 December 2007.