SPEC® CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Acer Incorporated

Acer Altos R920 (Intel Xeon E7210)

SPECfp®_rate2006 = 81.5

SPECfp_rate_base2006 = 74.8

CPU2006 license: 97
Test sponsor: Acer Incorporated
Tested by: Acer Incorporated

Test date: Dec-2007
Hardware Availability: Nov-2007
Software Availability: Nov-2007

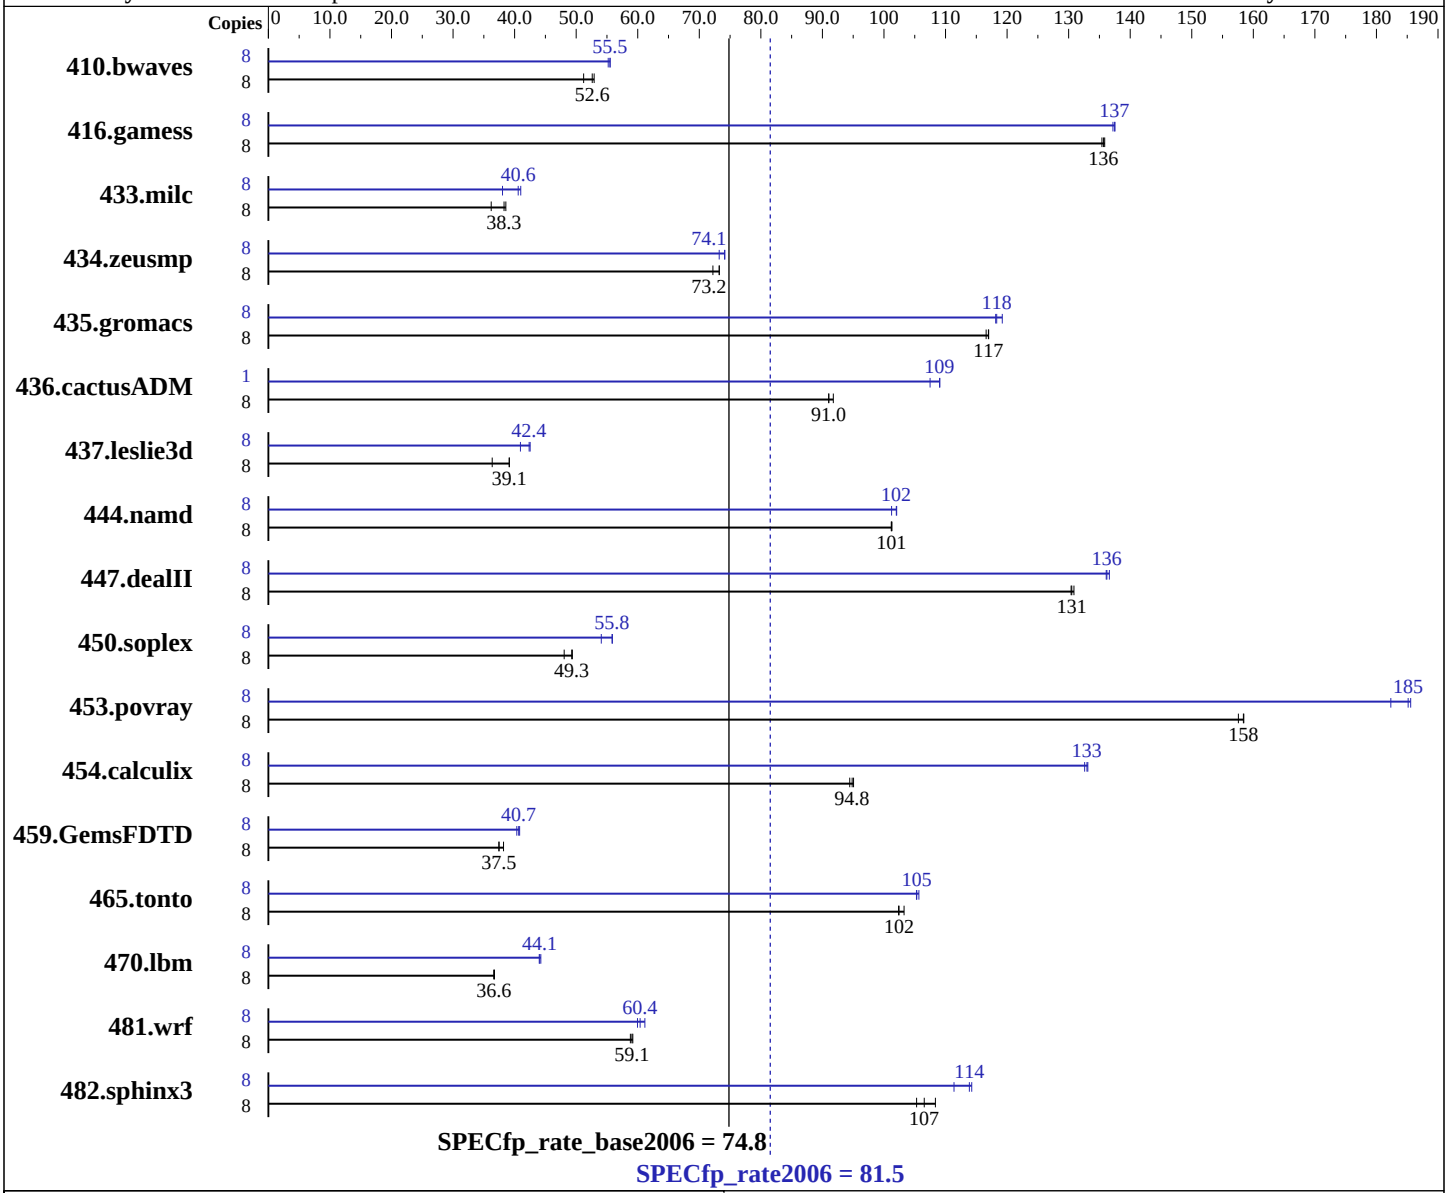

Hardware

CPU Name:	Intel Xeon E7210
CPU Characteristics:	1066MHz system bus
CPU MHz:	2400
FPU:	Integrated
CPU(s) enabled:	8 cores, 4 chips, 2 cores/chip
CPU(s) orderable:	1, 2, 4 chips
Primary Cache:	32 KB I + 32 KB D on chip per core
Secondary Cache:	4 MB I+D on chip per core

Continued on next page

Software

Operating System:	SuSE Linux Enterprise Server 10 SP1 EM64T (kernel 2.6.16.46-0.12-smp)
Compiler:	Intel C++ and Fortran Compiler 10.1 for Linux Build 20070913 Package ID: l_cc_p_10.1.008, l_fc_p_10.1.008
Auto Parallel:	Yes
File System:	ReiserFS
System State:	Multi-user, level 3
Base Pointers:	64-bit

Continued on next page

SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Acer Incorporated

Acer Altos R920 (Intel Xeon E7210)

SPECfp_rate2006 = 81.5

SPECfp_rate_base2006 = 74.8

CPU2006 license: 97
Test sponsor: Acer Incorporated
Tested by: Acer Incorporated

Test date: Dec-2007
Hardware Availability: Nov-2007
Software Availability: Nov-2007

L3 Cache: None
Other Cache: None
Memory: 16 GB (16 x 1024MB ECC FB-DIMM DDR2-667 CL5-5-5)
Disk Subsystem: 1 x 73GB 10000PRM SAS HDD
Other Hardware: None

Peak Pointers: 32/64-bit
Other Software: Microquill SmartHeap V8.1
Binutils 2.17.50.0.15

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	8	2123	51.2	**2067**	**52.6**	2054	52.9	8	1969	55.2	**1960**	**55.5**	1958	55.5
416.gamess	8	1157	135	1153	136	**1155**	**136**	8	**1139**	**137**	1139	138	1142	137
433.milc	8	2029	36.2	1904	38.6	**1918**	**38.3**	8	1931	38.0	1791	41.0	**1810**	**40.6**
434.zeusmp	8	1008	72.2	**994**	**73.2**	994	73.2	8	994	73.2	982	74.2	**982**	**74.1**
435.gromacs	8	**488**	**117**	490	117	488	117	8	479	119	483	118	**483**	**118**
436.cactusADM	8	1050	91.0	**1050**	**91.0**	1042	91.8	1	111	107	**110**	**109**	110	109
437.leslie3d	8	2068	36.4	**1922**	**39.1**	1921	39.1	8	1837	40.9	1768	42.5	**1775**	**42.4**
444.namd	8	633	101	**634**	**101**	634	101	8	**629**	**102**	634	101	629	102
447.dealII	8	699	131	702	130	**701**	**131**	8	672	136	**672**	**136**	670	137
450.soplex	8	1389	48.1	**1354**	**49.3**	1351	49.4	8	1234	54.1	**1195**	**55.8**	1194	55.9
453.povray	8	270	158	**269**	**158**	269	158	8	229	186	**230**	**185**	233	182
454.calculix	8	699	94.4	694	95.1	**696**	**94.8**	8	496	133	498	133	**496**	**133**
459.GemsFDTD	8	2222	38.2	**2265**	**37.5**	2267	37.4	8	2103	40.4	2080	40.8	**2088**	**40.7**
465.tonto	8	762	103	769	102	**768**	**102**	8	745	106	**747**	**105**	748	105
470.lbm	8	2993	36.7	3000	36.6	**2999**	**36.6**	8	2484	44.3	2498	44.0	**2494**	**44.1**
481.wrf	8	1520	58.8	1509	59.2	**1513**	**59.1**	8	1490	60.0	**1480**	**60.4**	1461	61.2
482.sphinx3	8	1439	108	1481	105	**1463**	**107**	8	1400	111	**1369**	**114**	1365	114

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

General Notes

```
All benchmarks compiled in 64-bit mode except 437.leslie3d, 450.soplex
470.lbm and 482.sphinx3, at peak, are compiled in 32-bit mode
BIOS Settings
  Hardware Prefetcher set to OFF

  Adjacent Cache Line Prefetch set to OFF

All results used taskset to bind processes to cores.
"ulimit -s unlimited" was set for stacksize unlimited
OMP_NUM_THREADS set to number of cores
```

Base Compiler Invocation

C benchmarks:
icc

C++ benchmarks:
icpc

Fortran benchmarks:
ifort

Benchmarks using both Fortran and C:
icc ifort

Base Portability Flags

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
450.soplex: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64

Base Optimization Flags

C benchmarks:
-fast

C++ benchmarks:
-fast

Fortran benchmarks:
-fast

Benchmarks using both Fortran and C:
-fast

Peak Compiler Invocation

C benchmarks (except as noted below):
`/opt/intel/cc/10.1.008/bin/icc -L/opt/intel/cc/10.1.008/lib -I/opt/intel/cc/10.1.008/include`

433.milc: `icc`

C++ benchmarks (except as noted below):
`icpc`

450.soplex: `/opt/intel/cc/10.1.008/bin/icpc -L/opt/intel/cc/10.1.008/lib -I/opt/intel/cc/10.1.008/include`

Fortran benchmarks (except as noted below):
`ifort`

437.leslie3d: `/opt/intel/fc/10.1.008/bin/ifort -L/opt/intel/fc/10.1.008/lib -I/opt/intel/fc/10.1.008/include`

Benchmarks using both Fortran and C:
`icc ifort`

Peak Portability Flags

410.bwaves: `-DSPEC_CPU_LP64`
416.gamess: `-DSPEC_CPU_LP64`
433.milc: `-DSPEC_CPU_LP64`
434.zeusmp: `-DSPEC_CPU_LP64`
435.gromacs: `-DSPEC_CPU_LP64 -nofor_main`
436.cactusADM: `-DSPEC_CPU_LP64 -nofor_main`
444.namd: `-DSPEC_CPU_LP64`
447.dealII: `-DSPEC_CPU_LP64`
453.povray: `-DSPEC_CPU_LP64`
454.calculix: `-DSPEC_CPU_LP64 -nofor_main`
459.GemsFDTD: `-DSPEC_CPU_LP64`
465.tonto: `-DSPEC_CPU_LP64`
481.wrf: `-DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX`

Peak Optimization Flags

C benchmarks:

433.milc: `-prof-gen`(pass 1) `-prof-use`(pass 2) `-fast -fno-alias -auto-ilp32`

470.lbm: `-prof-gen`(pass 1) `-prof-use`(pass 2) `-fast -unroll2 -scalar-rep- -prefetch -opt-malloc-options=3`

Continued on next page

Peak Optimization Flags (Continued)

482.sphinx3: -fast -unroll2

C++ benchmarks:

444.namd: -prof-gen(pass 1) -prof-use(pass 2) -fast -fno-alias -auto-ilp32

447.dealII: -prof-gen(pass 1) -prof-use(pass 2) -fast -unroll2 -ansi-alias -scalar-rep-

450.soplex: -prof-gen(pass 1) -prof-use(pass 2) -fast -opt-malloc-options=3

453.povray: -prof-gen(pass 1) -prof-use(pass 2) -fast -unroll4 -ansi-alias

Fortran benchmarks:

410.bwaves: -fast -prefetch

416.gamess: -prof-gen(pass 1) -prof-use(pass 2) -fast -unroll2 -Ob0 -ansi-alias -scalar-rep-

434.zeusmp: -prof-gen(pass 1) -prof-use(pass 2) -fast

437.leslie3d: -prof-gen(pass 1) -prof-use(pass 2) -fast -prefetch -opt-malloc-options=3

459.GemsFDTD: -prof-gen(pass 1) -prof-use(pass 2) -fast -unroll2 -Ob0 -prefetch

465.tonto: -prof-gen(pass 1) -prof-use(pass 2) -fast -unroll4 -auto

Benchmarks using both Fortran and C:

435.gromacs: -prof-gen(pass 1) -prof-use(pass 2) -fast -prefetch -auto-ilp32

436.cactusADM: -prof-gen(pass 1) -prof-use(pass 2) -fast -unroll2 -prefetch -parallel -auto-ilp32

454.calculix: -fast -unroll-aggressive -auto-ilp32

481.wrf: -fast -auto-ilp32

The flags file that was used to format this result can be browsed at
http://www.spec.org/cpu2006/flags/Intel-ic10.1-FP-intel64-linux-flags.20090714.08.html

You can also download the XML flags source by saving the following link:
http://www.spec.org/cpu2006/flags/Intel-ic10.1-FP-intel64-linux-flags.20090714.08.xml

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.0.
Report generated on Tue Jul 22 16:10:57 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 23 January 2008.