SPEC® CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge 1950 III (Intel Xeon X5460, 3.16 GHz)

SPECfp®_rate2006 = 77.6

SPECfp_rate_base2006 = 69.7

CPU2006 license: 55
Test sponsor: Dell Inc.
Tested by: Dell Inc.

Test date: Jan-2008
Hardware Availability: Nov-2007
Software Availability: Nov-2007

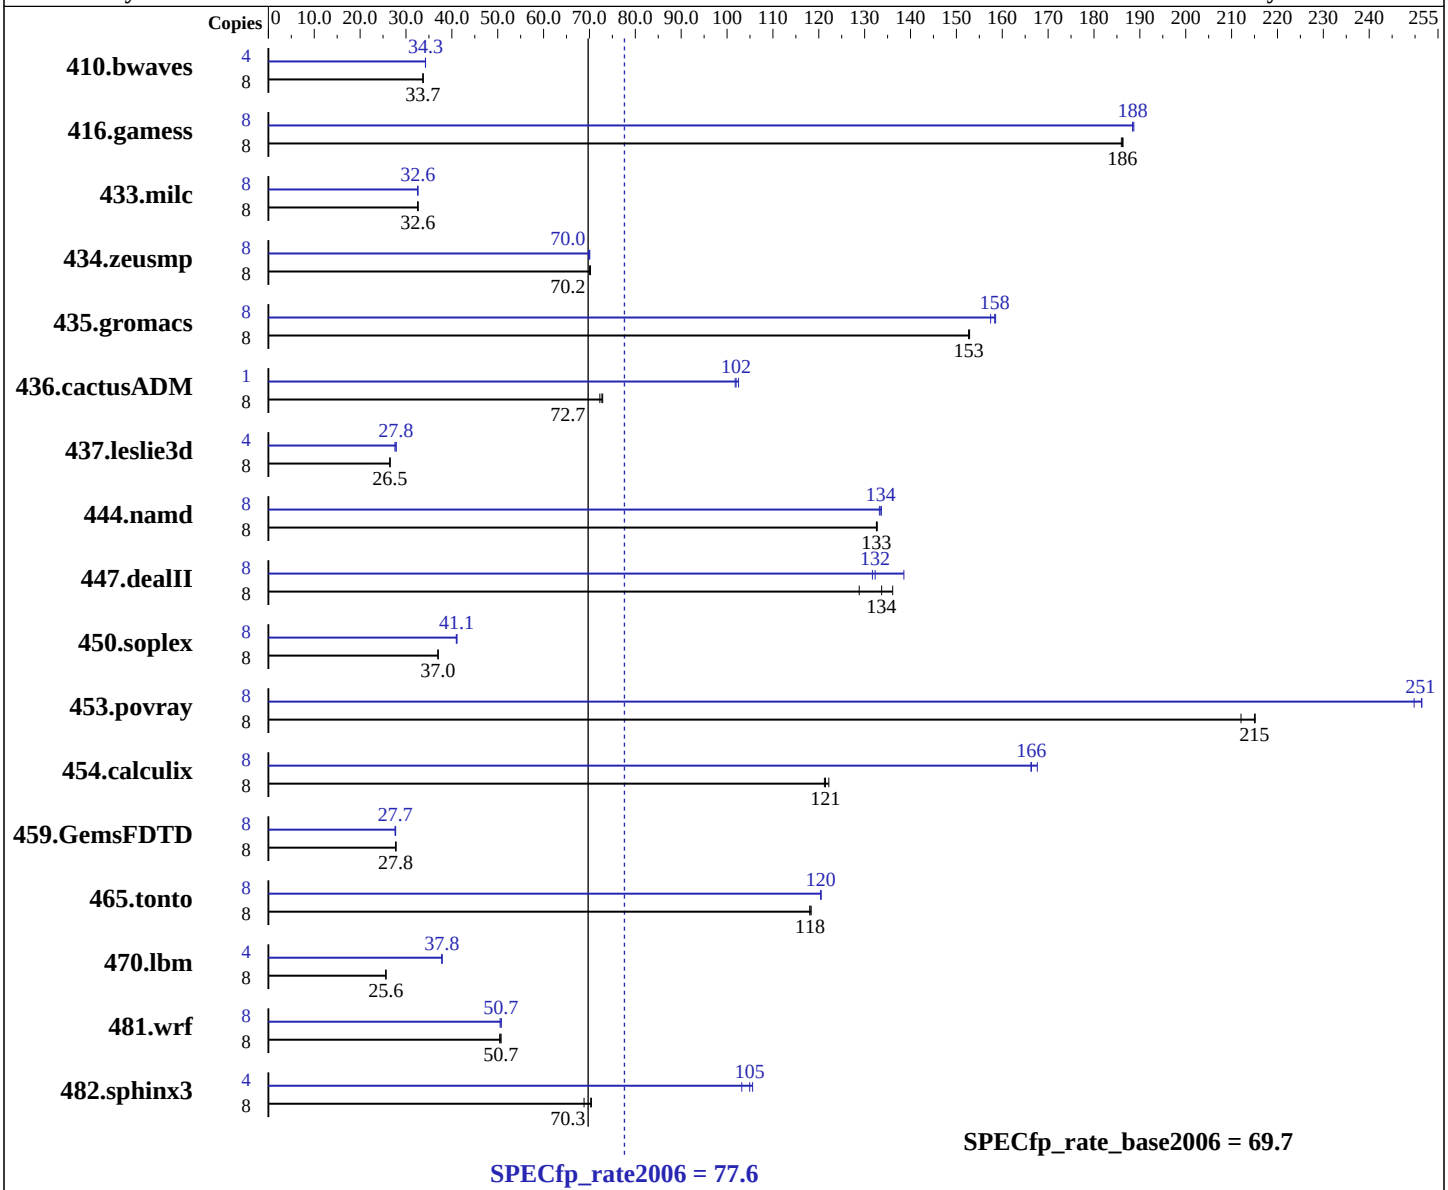

Hardware

CPU Name:	Intel Xeon X5460
CPU Characteristics:	1333 MHz system bus
CPU MHz:	3166
FPU:	Integrated
CPU(s) enabled:	8 cores, 2 chips, 4 cores/chip
CPU(s) orderable:	1,2 chips
Primary Cache:	32 KB I + 32 KB D on chip per core
Secondary Cache:	12 MB I+D on chip per chip, 6 MB shared / 2 cores

Continued on next page

Software

Operating System:	SUSE Linux Enterprise Server 10 (x86_64) SP1, Kernel 2.6.16.46-0.12-smp
Compiler:	Intel C++ and Fortran Compiler 10.1 for Linux Build 20070913 Package ID: l_cc_p_10.1.008, l_fc_p_10.1.008
Auto Parallel:	Yes
File System:	ReiserFS
System State:	Multi-user, run level 3
Base Pointers:	64-bit

Continued on next page

SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge 1950 III (Intel Xeon X5460, 3.16 GHz)

SPECfp_rate2006 = 77.6

SPECfp_rate_base2006 = 69.7

CPU2006 license: 55
Test sponsor: Dell Inc.
Tested by: Dell Inc.

Test date: Jan-2008
Hardware Availability: Nov-2007
Software Availability: Nov-2007

L3 Cache: None
Other Cache: None
Memory: 16 GB (8x2 GB DDR2-667 ECC CL5 FB-DIMM)
Disk Subsystem: 1 x 73 GB SAS 15k RPM
Other Hardware: None

Peak Pointers: 32/64-bit
Other Software: None

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	8	3225	33.7	3224	33.7	**3224**	**33.7**	4	1587	34.2	**1587**	**34.3**	1586	34.3
416.gamess	8	842	186	841	186	**841**	**186**	8	831	188	**831**	**188**	830	189
433.milc	8	2256	32.5	2251	32.6	**2251**	**32.6**	8	2259	32.5	2252	32.6	**2254**	**32.6**
434.zeusmp	8	**1037**	**70.2**	1040	70.0	1037	70.2	8	**1040**	**70.0**	1039	70.1	1043	69.8
435.gromacs	8	374	153	374	153	**374**	**153**	8	363	157	360	159	**361**	**158**
436.cactusADM	8	1323	72.3	**1315**	**72.7**	1312	72.9	1	117	103	117	102	**117**	**102**
437.leslie3d	8	**2836**	**26.5**	2834	26.5	2839	26.5	4	**1350**	**27.8**	1350	27.8	1363	27.6
444.namd	8	483	133	**484**	**133**	484	133	8	480	134	482	133	**480**	**134**
447.dealII	8	710	129	**685**	**134**	672	136	8	**692**	**132**	661	139	695	132
450.soplex	8	1803	37.0	1804	37.0	**1804**	**37.0**	8	**1624**	**41.1**	1629	41.0	1624	41.1
453.povray	8	**198**	**215**	201	212	198	215	8	**169**	**251**	169	251	170	250
454.calculix	8	**543**	**121**	544	121	540	122	8	397	166	394	168	**397**	**166**
459.GemsFDTD	8	3058	27.8	3050	27.8	**3055**	**27.8**	8	**3067**	**27.7**	3071	27.6	3058	27.8
465.tonto	8	**667**	**118**	667	118	665	118	8	654	120	653	121	**654**	**120**
470.lbm	8	4289	25.6	**4292**	**25.6**	4292	25.6	4	**1452**	**37.8**	1451	37.9	1453	37.8
481.wrf	8	**1763**	**50.7**	1772	50.4	1762	50.7	8	1760	50.8	1769	50.5	**1761**	**50.7**
482.sphinx3	8	**2219**	**70.3**	2214	70.4	2266	68.8	4	755	103	**743**	**105**	738	106

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Compiler Invocation Notes

```
OMP_NUM_THREADS set to number of cores
KMP_STACK_SIZE set to 64M
KMP_AFFINITY set to physical,0
```

Operating System Notes

```
'ulimit -s unlimited' was used to set the stacksize to unlimited prior to run
'/usr/bin/taskset' used to bind processes to CPUs
```

Platform Notes

```
BIOS Settings:
Adjacent Cache Line Prefetch = Disabled (default Enabled)
Hardware Prefetcher = Disabled (default Enabled)
```

Base Compiler Invocation

C benchmarks:
icc

C++ benchmarks:
icpc

Fortran benchmarks:
ifort

Benchmarks using both Fortran and C:
icc ifort

Base Portability Flags

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
450.soplex: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64

Base Optimization Flags

C benchmarks:
-fast

C++ benchmarks:
-fast

Continued on next page

Base Optimization Flags (Continued)

Fortran benchmarks:
`-fast`

Benchmarks using both Fortran and C:
`-fast`

Peak Compiler Invocation

C benchmarks (except as noted below):
`/opt/intel/cc/10.1.008/bin/icc -L/opt/intel/cc/10.1.008/lib -I/opt/intel/cc/10.1.008/include`

433.milc: `icc`

C++ benchmarks (except as noted below):
`icpc`

450.soplex: `/opt/intel/cc/10.1.008/bin/icpc -L/opt/intel/cc/10.1.008/lib -I/opt/intel/cc/10.1.008/include`

Fortran benchmarks (except as noted below):
`ifort`

437.leslie3d: `/opt/intel/fc/10.1.008/bin/ifort -L/opt/intel/fc/10.1.008/lib -I/opt/intel/fc/10.1.008/include`

Benchmarks using both Fortran and C:
`icc ifort`

Peak Portability Flags

410.bwaves: `-DSPEC_CPU_LP64`
416.gamess: `-DSPEC_CPU_LP64`
433.milc: `-DSPEC_CPU_LP64`
434.zeusmp: `-DSPEC_CPU_LP64`
435.gromacs: `-DSPEC_CPU_LP64 -nofor_main`
436.cactusADM: `-DSPEC_CPU_LP64 -nofor_main`
444.namd: `-DSPEC_CPU_LP64`
447.dealII: `-DSPEC_CPU_LP64`
453.povray: `-DSPEC_CPU_LP64`
454.calculix: `-DSPEC_CPU_LP64 -nofor_main`
459.GemsFDTD: `-DSPEC_CPU_LP64`
465.tonto: `-DSPEC_CPU_LP64`
481.wrf: `-DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX`

Peak Optimization Flags

C benchmarks:

433.milc: `-prof-gen`(pass 1) `-prof-use`(pass 2) `-fast -fno-alias -auto-ilp32`

470.lbm: `-prof-gen`(pass 1) `-prof-use`(pass 2) `-fast -unroll2 -scalar-rep- -prefetch -opt-malloc-options=3`

482.sphinx3: `-fast -unroll2`

C++ benchmarks:

444.namd: `-prof-gen`(pass 1) `-prof-use`(pass 2) `-fast -fno-alias -auto-ilp32`

447.dealII: `-prof-gen`(pass 1) `-prof-use`(pass 2) `-fast -unroll2 -ansi-alias -scalar-rep-`

450.soplex: `-prof-gen`(pass 1) `-prof-use`(pass 2) `-fast -opt-malloc-options=3`

453.povray: `-prof-gen`(pass 1) `-prof-use`(pass 2) `-fast -unroll4 -ansi-alias`

Fortran benchmarks:

410.bwaves: `-fast -prefetch`

416.gamess: `-prof-gen`(pass 1) `-prof-use`(pass 2) `-fast -unroll2 -Ob0 -ansi-alias -scalar-rep-`

434.zeusmp: `-prof-gen`(pass 1) `-prof-use`(pass 2) `-fast`

437.leslie3d: `-prof-gen`(pass 1) `-prof-use`(pass 2) `-fast -prefetch -opt-malloc-options=3`

459.GemsFDTD: `-prof-gen`(pass 1) `-prof-use`(pass 2) `-fast -unroll2 -Ob0 -prefetch`

465.tonto: `-prof-gen`(pass 1) `-prof-use`(pass 2) `-fast -unroll4 -auto`

Benchmarks using both Fortran and C:

435.gromacs: `-prof-gen`(pass 1) `-prof-use`(pass 2) `-fast -prefetch -auto-ilp32`

436.cactusADM: `-prof-gen`(pass 1) `-prof-use`(pass 2) `-fast -unroll2 -prefetch -parallel -auto-ilp32`

Continued on next page

Peak Optimization Flags (Continued)

454.calculix: `-fast -unroll-aggressive -auto-ilp32`

481.wrf: `-fast -auto-ilp32`

The flags file that was used to format this result can be browsed at
`http://www.spec.org/cpu2006/flags/Intel-ic10.1-FP-intel64-linux-flags.20090714.11.html`

You can also download the XML flags source by saving the following link:
`http://www.spec.org/cpu2006/flags/Intel-ic10.1-FP-intel64-linux-flags.20090714.11.xml`

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.0.
Report generated on Tue Jul 22 16:36:04 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 6 February 2008.