SPEC® CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Fujitsu Siemens Computers

PRIMERGY RX600 S4, Intel Xeon X7350, 2.93 GHz

SPECfp®_rate2006 = 117

SPECfp_rate_base2006 = 107

CPU2006 license: 22
Test sponsor: Fujitsu Siemens Computers
Tested by: Fujitsu Siemens Computers

Test date: Jan-2008
Hardware Availability: Dec-2007
Software Availability: Nov-2007

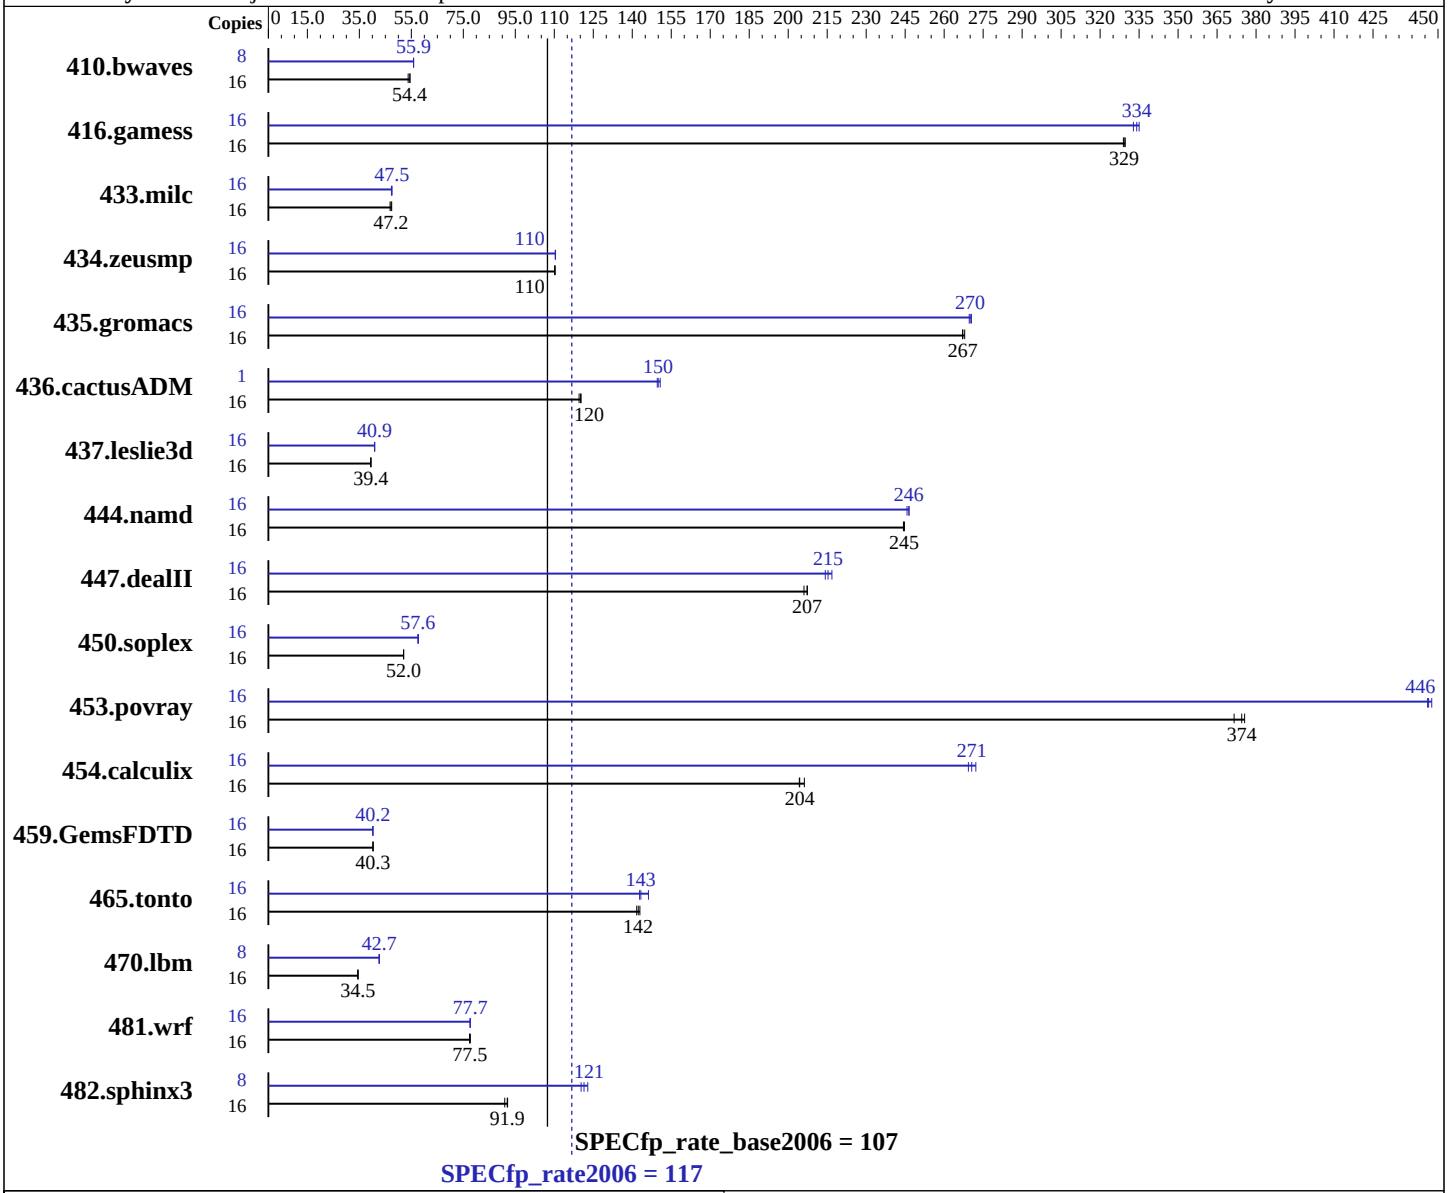

Hardware

CPU Name:	Intel Xeon X7350
CPU Characteristics:	1067 MHz system bus
CPU MHz:	2933
FPU:	Integrated
CPU(s) enabled:	16 cores, 4 chips, 4 cores/chip
CPU(s) orderable:	1,2,4 chips
Primary Cache:	32 KB I + 32 KB D on chip per core
Secondary Cache:	8 MB I+D on chip per chip, 4 MB shared / 2 cores

Continued on next page

Software

Operating System:	SUSE Linux Enterprise Server 10 (x86_64) SP1, Kernel 2.6.16.46-0.12-smp
Compiler:	Intel C++ and Fortran Compiler for Linux32 and Linux64 Version 10.1 - Build 20070725
Auto Parallel:	Yes
File System:	ext2
System State:	Multiuser, Runlevel 3
Base Pointers:	64-bit

Continued on next page

SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Fujitsu Siemens Computers

PRIMERGY RX600 S4, Intel Xeon X7350, 2.93 GHz

SPECfp_rate2006 = 117

SPECfp_rate_base2006 = 107

CPU2006 license: 22
Test sponsor: Fujitsu Siemens Computers
Tested by: Fujitsu Siemens Computers

Test date: Jan-2008
Hardware Availability: Dec-2007
Software Availability: Nov-2007

L3 Cache: None
Other Cache: None
Memory: 64 GB (16x4 GB PC2-5300F, 2 rank, CAS 5-5-5, with ECC)
Disk Subsystem: Seagate ST973451SS (SAS, 73GB, 15000rpm)
Other Hardware: None

Peak Pointers: 32/64-bit
Other Software: None

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	16	4043	53.8	**3996**	**54.4**	3991	54.5	8	**1946**	**55.9**	1947	55.8	1945	55.9
416.gamess	16	**951**	**329**	952	329	950	330	16	**938**	**334**	941	333	935	335
433.milc	16	3137	46.8	**3111**	**47.2**	3096	47.4	16	3103	47.3	3090	47.5	**3092**	**47.5**
434.zeusmp	16	1321	110	**1321**	**110**	1320	110	16	1318	110	1319	110	**1318**	**110**
435.gromacs	16	426	268	**428**	**267**	428	267	16	422	271	424	270	**423**	**270**
436.cactusADM	16	**1592**	**120**	1599	120	1589	120	1	**79.7**	**150**	79.9	150	79.3	151
437.leslie3d	16	**3814**	**39.4**	3819	39.4	3813	39.4	16	3684	40.8	**3678**	**40.9**	3677	40.9
444.namd	16	**525**	**245**	524	245	525	244	16	522	246	**521**	**246**	521	247
447.dealII	16	883	207	888	206	**883**	**207**	16	**850**	**215**	854	214	844	217
450.soplex	16	**2565**	**52.0**	2563	52.1	2566	52.0	16	2317	57.6	2315	57.6	**2316**	**57.6**
453.povray	16	227	376	229	372	**227**	**374**	16	190	448	191	446	**191**	**446**
454.calculix	16	**646**	**204**	640	206	646	204	16	**488**	**271**	490	269	485	272
459.GemsFDTD	16	**4216**	**40.3**	4216	40.3	4216	40.3	16	4221	40.2	4224	40.2	**4224**	**40.2**
465.tonto	16	1101	143	1111	142	**1106**	**142**	16	**1099**	**143**	1077	146	1102	143
470.lbm	16	6382	34.4	**6378**	**34.5**	6377	34.5	8	2578	42.6	2577	42.7	**2577**	**42.7**
481.wrf	16	2310	77.4	**2305**	**77.5**	2301	77.7	16	2302	77.6	2301	77.7	**2302**	**77.7**
482.sphinx3	16	3429	90.9	3388	92.0	**3393**	**91.9**	8	**1284**	**121**	1296	120	1269	123

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Operating System Notes

```
'ulimit -s unlimited' was used to set the stacksize to unlimited prior to run
'OMP_NUM_THREADS' set to number of cores (default)
```

General Notes

```
This result has been produced with binaries provided and compiled by Intel.

All binaries were built with 64-bit Intel compiler except:
437.leslie3d, 450.soplex, 470.lbm and 482.sphinx3 in peak were built with
32-bit Intel compiler by changing the path for include and library files.

For information about Fujitsu Siemens Computers please see:
```

Continued on next page

General Notes (Continued)

http://www.fujitsu-siemens.com

Base Compiler Invocation

C benchmarks:
icc

C++ benchmarks:
icpc

Fortran benchmarks:
ifort

Benchmarks using both Fortran and C:
icc ifort

Base Portability Flags

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
450.soplex: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64

Base Optimization Flags

C benchmarks:
-fast

C++ benchmarks:
-fast

Fortran benchmarks:
-fast

Continued on next page

Base Optimization Flags (Continued)

Benchmarks using both Fortran and C:
`-fast`

Peak Compiler Invocation

C benchmarks (except as noted below):
`/home/cmplr/usr3/alrahate/compilers/ic10.1mainline/20070725/Linux32/bin/icc`
`-L/home/cmplr/usr3/alrahate/compilers/ic10.1mainline/20070725/Linux32/lib`
`-I/home/cmplr/usr3/alrahate/compilers/ic10.1mainline/20070725/Linux32/include`

433.milc: `icc`

C++ benchmarks (except as noted below):
`icpc`

450.soplex: `/home/cmplr/usr3/alrahate/compilers/ic10.1mainline/20070725/Linux32/bin/icpc`
`-L/home/cmplr/usr3/alrahate/compilers/ic10.1mainline/20070725/Linux32/lib`
`-I/home/cmplr/usr3/alrahate/compilers/ic10.1mainline/20070725/Linux32/include`

Fortran benchmarks (except as noted below):
`ifort`

437.leslie3d: `/home/cmplr/usr3/alrahate/compilers/ic10.1mainline/20070725/Linux32/bin/ifort`
`-L/home/cmplr/usr3/alrahate/compilers/ic10.1mainline/20070725/Linux32/lib`
`-I/home/cmplr/usr3/alrahate/compilers/ic10.1mainline/20070725/Linux32/include`

Benchmarks using both Fortran and C:
`icc ifort`

Peak Portability Flags

410.bwaves: `-DSPEC_CPU_LP64`
416.gamess: `-DSPEC_CPU_LP64`
433.milc: `-DSPEC_CPU_LP64`
434.zeusmp: `-DSPEC_CPU_LP64`
435.gromacs: `-DSPEC_CPU_LP64 -nofor_main`
436.cactusADM: `-DSPEC_CPU_LP64 -nofor_main`
444.namd: `-DSPEC_CPU_LP64`
447.dealII: `-DSPEC_CPU_LP64`
453.povray: `-DSPEC_CPU_LP64`
454.calculix: `-DSPEC_CPU_LP64 -nofor_main`
459.GemsFDTD: `-DSPEC_CPU_LP64`
465.tonto: `-DSPEC_CPU_LP64`
481.wrf: `-DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX`

Peak Optimization Flags

C benchmarks:

433.milc: `-prof-gen`(pass 1) `-prof-use`(pass 2) `-fast -fno-alias -auto-ilp32`

470.lbm: `-prof-gen`(pass 1) `-prof-use`(pass 2) `-fast -unroll2 -scalar-rep- -prefetch -opt-malloc-options=3`

482.sphinx3: `-fast -unroll2`

C++ benchmarks:

444.namd: `-prof-gen`(pass 1) `-prof-use`(pass 2) `-fast -fno-alias -auto-ilp32`

447.dealII: `-prof-gen`(pass 1) `-prof-use`(pass 2) `-fast -unroll2 -ansi-alias -scalar-rep-`

450.soplex: `-prof-gen`(pass 1) `-prof-use`(pass 2) `-fast -opt-malloc-options=3`

453.povray: `-prof-gen`(pass 1) `-prof-use`(pass 2) `-fast -unroll4 -ansi-alias`

Fortran benchmarks:

410.bwaves: `-fast -prefetch`

416.gamess: `-prof-gen`(pass 1) `-prof-use`(pass 2) `-fast -unroll2 -Ob0 -ansi-alias -scalar-rep-`

434.zeusmp: `-prof-gen`(pass 1) `-prof-use`(pass 2) `-fast`

437.leslie3d: `-prof-gen`(pass 1) `-prof-use`(pass 2) `-fast -prefetch -opt-malloc-options=3`

459.GemsFDTD: `-prof-gen`(pass 1) `-prof-use`(pass 2) `-fast -unroll2 -Ob0 -prefetch`

465.tonto: `-prof-gen`(pass 1) `-prof-use`(pass 2) `-fast -unroll4 -auto`

Benchmarks using both Fortran and C:

435.gromacs: `-prof-gen`(pass 1) `-prof-use`(pass 2) `-fast -prefetch -auto-ilp32`

436.cactusADM: `-prof-gen`(pass 1) `-prof-use`(pass 2) `-fast -unroll2 -prefetch -parallel -auto-ilp32`

Continued on next page

Peak Optimization Flags (Continued)

454.calculix: `-fast -unroll-aggressive -auto-ilp32`

481.wrf: `-fast -auto-ilp32`

The flags file that was used to format this result can be browsed at
`http://www.spec.org/cpu2006/flags/Intel-ic10.1-FP-intel64-linux-flags.20090714.01.html`

You can also download the XML flags source by saving the following link:
`http://www.spec.org/cpu2006/flags/Intel-ic10.1-FP-intel64-linux-flags.20090714.01.xml`

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.0.
Report generated on Tue Jul 22 15:56:33 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 19 February 2008.