



SPEC® CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

HITACHI

BladeSymphony BS320 (Intel Xeon E5450)

SPECfp®_rate2006 = 75.4

CPU2006 license: 872


Test date: Feb-2008

Test sponsor: HITACHI

Hardware Availability: Nov-2007

Tested by: HITACHI

Software Availability: Nov-2007

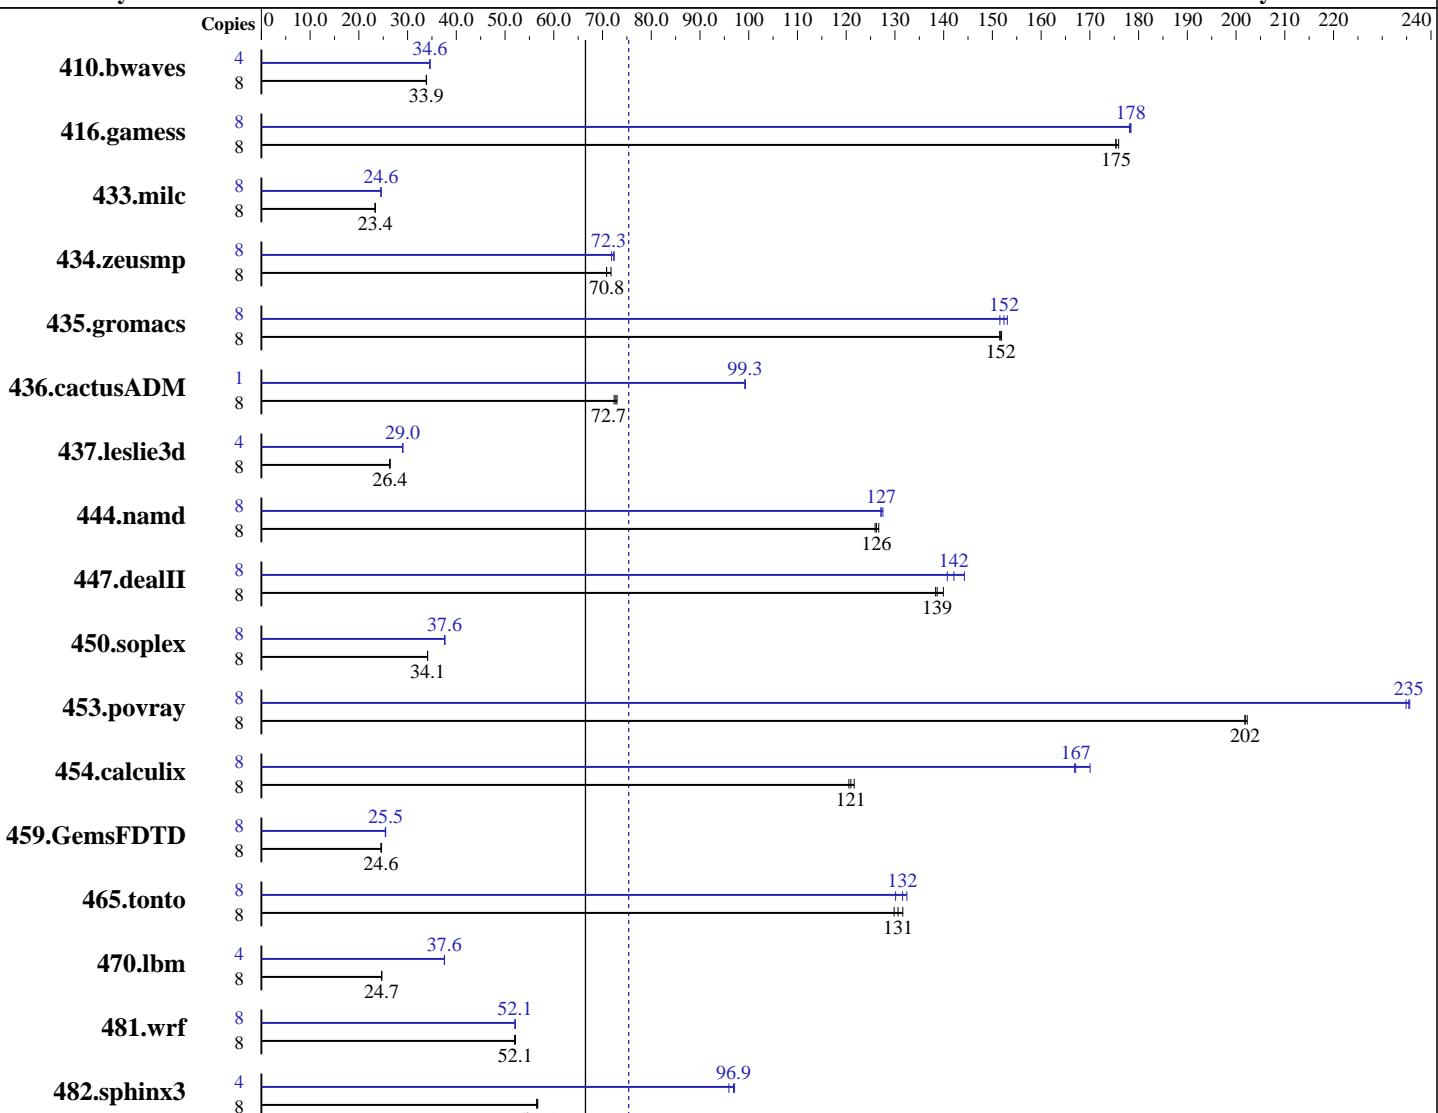

SPECfp_rate_base2006 = 66.5

SPECfp_rate2006 = 75.4

Hardware

CPU Name: Intel Xeon E5450
CPU Characteristics: 1333MHz system bus
CPU MHz: 3000
FPU: Integrated
CPU(s) enabled: 8 cores, 2 chips, 4 cores/chip
CPU(s) orderable: 1, 2 chips
Primary Cache: 32 KB I + 32 KB D on chip per core
Secondary Cache: 12 MB I+D on chip per chip, 6 MB shared / 2 cores

Software

Operating System: Red Hat Enterprise Linux Server release 5.1 (Tikanga)
Compiler: Kernel 2.6.18-53.el5 on an x86_64
Intel C++ and Fortran Compiler 10.1 for Linux
Build 20070913 Package ID:
l_cc_p_10.1.008,
l_fc_p_10.1.008

Continued on next page

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

HITACHI

BladeSymphony BS320 (Intel Xeon E5450)

SPECfp_rate2006 = 75.4

CPU2006 license: 872

Test date: Feb-2008

Hardware Availability: Nov-2007

Software Availability: Nov-2007

Test sponsor: HITACHI

Tested by: HITACHI

L3 Cache: None
 Other Cache: None
 Memory: 16 GB(4 x 4 GB PC2-5300F CAS 5-5-5)
 Disk Subsystem: 1 x 147 GB 10000 rpm SAS
 Other Hardware: None

Auto Parallel: Yes
 File System: ext3
 System State: Multi-user run level 3
 Base Pointers: 64-bit
 Peak Pointers: 32/64-bit
 Other Software: None

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	8	<u>3211</u>	<u>33.9</u>	3208	33.9	3213	33.8	4	<u>1572</u>	<u>34.6</u>	1572	34.6	1572	34.6
416.gamess	8	893	175	<u>893</u>	<u>175</u>	890	176	8	878	178	<u>878</u>	<u>178</u>	879	178
433.milc	8	3148	23.3	<u>3144</u>	<u>23.4</u>	3141	23.4	8	2988	24.6	2993	24.5	<u>2991</u>	<u>24.6</u>
434.zeusmp	8	<u>1028</u>	<u>70.8</u>	1028	70.8	1015	71.8	8	1006	72.4	<u>1007</u>	<u>72.3</u>	1013	71.9
435.gromacs	8	377	151	376	152	<u>377</u>	<u>152</u>	8	<u>375</u>	<u>152</u>	377	152	373	153
436.cactusADM	8	1321	72.4	1310	73.0	<u>1315</u>	<u>72.7</u>	1	120	99.3	<u>120</u>	<u>99.3</u>	120	99.2
437.leslie3d	8	<u>2849</u>	<u>26.4</u>	2856	26.3	2849	26.4	4	1298	29.0	1295	29.0	<u>1296</u>	<u>29.0</u>
444.namd	8	<u>508</u>	<u>126</u>	506	127	509	126	8	<u>505</u>	<u>127</u>	505	127	503	128
447.dealII	8	654	140	<u>660</u>	<u>139</u>	662	138	8	650	141	634	144	<u>644</u>	<u>142</u>
450.soplex	8	<u>1957</u>	<u>34.1</u>	1957	34.1	1956	34.1	8	1774	37.6	<u>1773</u>	<u>37.6</u>	1773	37.6
453.povray	8	210	202	<u>211</u>	<u>202</u>	211	202	8	181	235	181	236	<u>181</u>	<u>235</u>
454.calculix	8	<u>546</u>	<u>121</u>	543	122	547	121	8	388	170	<u>395</u>	<u>167</u>	396	167
459.GemsFDTD	8	<u>3454</u>	<u>24.6</u>	3441	24.7	3457	24.6	8	3328	25.5	<u>3332</u>	<u>25.5</u>	3338	25.4
465.tonto	8	598	132	<u>603</u>	<u>131</u>	606	130	8	<u>598</u>	<u>132</u>	594	132	605	130
470.lbm	8	4455	24.7	4452	24.7	<u>4453</u>	<u>24.7</u>	4	<u>1463</u>	<u>37.6</u>	1462	37.6	1464	37.5
481.wrf	8	1714	52.1	<u>1716</u>	<u>52.1</u>	1720	52.0	8	<u>1716</u>	<u>52.1</u>	1716	52.1	1717	52.0
482.sphinx3	8	2749	56.7	2761	56.5	<u>2756</u>	<u>56.6</u>	4	813	95.9	803	97.1	<u>805</u>	<u>96.9</u>

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

General Notes

'ulimit -s unlimited' was used to set the stacksize to unlimited prior to run
 '/bin/taskset' used to bind processes to CPUs
 OMP_NUM_THREADS set to number of cores
 KMP_AFFINITY set to physical,0

Base Compiler Invocation

C benchmarks:
 icc

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

HITACHI

BladeSymphony BS320 (Intel Xeon E5450)

SPECfp_rate2006 = 75.4

CPU2006 license: 872

Test sponsor: HITACHI

Tested by: HITACHI

Test date: Feb-2008

Hardware Availability: Nov-2007

Software Availability: Nov-2007

Base Compiler Invocation (Continued)

C++ benchmarks:

icpc

Fortran benchmarks:

ifort

Benchmarks using both Fortran and C:

icc ifort

Base Portability Flags

410.bwaves: -DSPEC_CPU_LP64
416.games: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
450.soplex: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64

Base Optimization Flags

C benchmarks:

-fast

C++ benchmarks:

-fast

Fortran benchmarks:

-fast

Benchmarks using both Fortran and C:

-fast



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

HITACHI

BladeSymphony BS320 (Intel Xeon E5450)

SPECfp_rate2006 = 75.4

CPU2006 license: 872

Test sponsor: HITACHI

Tested by: HITACHI

Test date: Feb-2008

Hardware Availability: Nov-2007

Software Availability: Nov-2007

Peak Compiler Invocation

C benchmarks (except as noted below):

```
/opt/intel/cc/10.1.008/bin/icc -L/opt/intel/cc/10.1.008/lib  
-I/opt/intel/cc/10.1.008/include
```

433.milc: icc

C++ benchmarks (except as noted below):

```
icpc
```

```
450.soplex: /opt/intel/cc/10.1.008/bin/icpc -L/opt/intel/cc/10.1.008/lib  
-I/opt/intel/cc/10.1.008/include
```

Fortran benchmarks (except as noted below):

```
ifort
```

```
437.leslie3d: /opt/intel/fc/10.1.008/bin/ifort -L/opt/intel/fc/10.1.008/lib  
-I/opt/intel/fc/10.1.008/include
```

Benchmarks using both Fortran and C:

```
icc ifort
```

Peak Portability Flags

```
410.bwaves: -DSPEC_CPU_LP64  
416.gamess: -DSPEC_CPU_LP64  
    433.milc: -DSPEC_CPU_LP64  
434.zeusmp: -DSPEC_CPU_LP64  
435.gromacs: -DSPEC_CPU_LP64 -nofor_main  
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main  
437.leslie3d: -DSPEC_CPU_LP64  
    444.namd: -DSPEC_CPU_LP64  
    447.dealII: -DSPEC_CPU_LP64  
453.povray: -DSPEC_CPU_LP64  
454.calculix: -DSPEC_CPU_LP64 -nofor_main  
459.GemsFDTD: -DSPEC_CPU_LP64  
465.tonto: -DSPEC_CPU_LP64  
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
```

Peak Optimization Flags

C benchmarks:

```
433.milc: -prof_gen(pass 1) -prof_use(pass 2) -fast -fno-alias  
-auto-ilp32
```

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

HITACHI

BladeSymphony BS320 (Intel Xeon E5450)

SPECfp_rate2006 = 75.4

CPU2006 license: 872

Test sponsor: HITACHI

Tested by: HITACHI

Test date: Feb-2008

Hardware Availability: Nov-2007

Software Availability: Nov-2007

Peak Optimization Flags (Continued)

470.lbm: -prof_gen(pass 1) -prof_use(pass 2) -fast -unroll12
-scalar-rep- -prefetch -opt-malloc-options=3

482.sphinx3: -fast -unroll12

C++ benchmarks:

444.namd: -prof_gen(pass 1) -prof_use(pass 2) -fast -fno-alias
-auto-ilp32

447.dealII: -prof_gen(pass 1) -prof_use(pass 2) -fast -unroll12
-ansi-alias -scalar-rep-

450.soplex: -prof_gen(pass 1) -prof_use(pass 2) -fast
-opt-malloc-options=3

453.povray: -prof_gen(pass 1) -prof_use(pass 2) -fast -unroll14
-ansi-alias

Fortran benchmarks:

410.bwaves: -fast -prefetch

416.gamess: -prof_gen(pass 1) -prof_use(pass 2) -fast -unroll12 -O0
-ansi-alias -scalar-rep-

434.zeusmp: -prof_gen(pass 1) -prof_use(pass 2) -fast

437.leslie3d: -prof_gen(pass 1) -prof_use(pass 2) -fast -prefetch
-opt-malloc-options=3

459.GemsFDTD: -prof_gen(pass 1) -prof_use(pass 2) -fast -unroll12 -O0
-prefetch

465.tonto: -prof_gen(pass 1) -prof_use(pass 2) -fast -unroll14 -auto

Benchmarks using both Fortran and C:

435.gromacs: -prof_gen(pass 1) -prof_use(pass 2) -fast -prefetch
-auto-ilp32

436.cactusADM: -prof_gen(pass 1) -prof_use(pass 2) -fast -unroll12
-prefetch -parallel -auto-ilp32

454.calculix: -fast -unroll-aggressive -auto-ilp32

481.wrf: -fast -auto-ilp32



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

HITACHI

BladeSymphony BS320 (Intel Xeon E5450)

SPECfp_rate2006 = 75.4

SPECfp_rate_base2006 = 66.5

CPU2006 license: 872

Test date: Feb-2008

Test sponsor: HITACHI

Hardware Availability: Nov-2007

Tested by: HITACHI

Software Availability: Nov-2007

The flags file that was used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic10.1-FP-intel64-linux-flags.20090713.01.html>

You can also download the XML flags source by saving the following link:

<http://www.spec.org/cpu2006/flags/Intel-ic10.1-FP-intel64-linux-flags.20090713.01.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.0.1.

Report generated on Tue Jul 22 15:42:07 2014 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 5 March 2008.