SPEC® CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Fujitsu Siemens Computers

PRIMERGY BX620 S4, Intel Xeon L5240, 3.0 GHz

SPECfp®_rate2006 = 54.0

SPECfp_rate_base2006 = 48.3

CPU2006 license: 22
Test sponsor: Fujitsu Siemens Computers
Tested by: Fujitsu Siemens Computers

Test date: Jan-2008
Hardware Availability: Apr-2008
Software Availability: Nov-2007

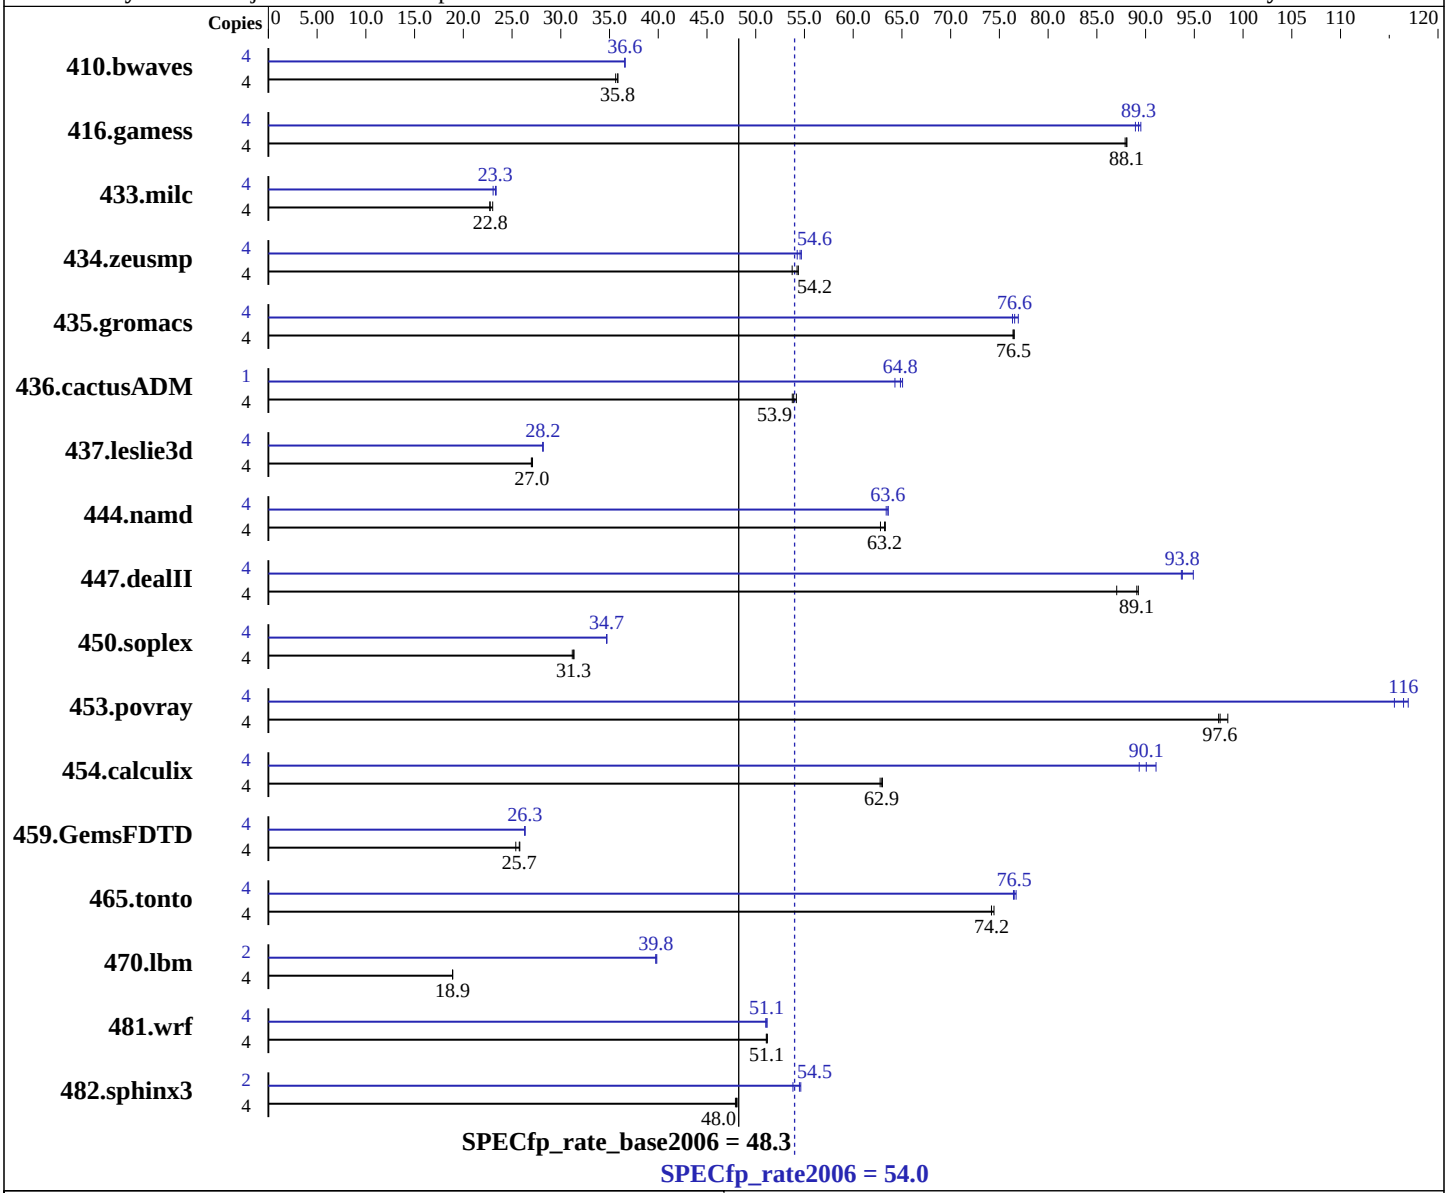

Hardware

CPU Name:	Intel Xeon L5240
CPU Characteristics:	1333 MHz system bus
CPU MHz:	3000
FPU:	Integrated
CPU(s) enabled:	4 cores, 2 chips, 2 cores/chip
CPU(s) orderable:	1,2 chips
Primary Cache:	32 KB I + 32 KB D on chip per core
Secondary Cache:	6 MB I+D on chip per chip

Continued on next page

Software

Operating System:	SUSE Linux Enterprise Server 10 (x86_64) SP1, Kernel 2.6.16.46-0.12-smp
Compiler:	Intel C++ and Fortran Compiler for Linux32 and Linux64 Version 10.1 - Build 20070725
Auto Parallel:	Yes
File System:	ext2
System State:	Multiuser, Runlevel 3
Base Pointers:	64-bit

Continued on next page

SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Fujitsu Siemens Computers

PRIMERGY BX620 S4, Intel Xeon L5240, 3.0 GHz

SPECfp_rate2006 = 54.0

SPECfp_rate_base2006 = 48.3

CPU2006 license: 22
Test sponsor: Fujitsu Siemens Computers
Tested by: Fujitsu Siemens Computers

Test date: Jan-2008
Hardware Availability: Apr-2008
Software Availability: Nov-2007

L3 Cache: None
Other Cache: None
Memory: 16 GB (8x2 GB PC2-5300F, 2 rank, CAS 5-5-5, with ECC)
Disk Subsystem: Seagate ST973451SS (SAS, 73GB, 15000rpm)
Other Hardware: None

Peak Pointers: 32/64-bit
Other Software: None

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	4	1526	35.6	1516	35.9	**1517**	**35.8**	4	1486	36.6	**1486**	**36.6**	1486	36.6
416.gamess	4	889	88.1	891	87.9	**889**	**88.1**	4	875	89.5	880	89.0	**877**	**89.3**
433.milc	4	1617	22.7	1596	23.0	**1614**	**22.8**	4	1593	23.1	1571	23.4	**1576**	**23.3**
434.zeusmp	4	677	53.7	**671**	**54.2**	669	54.4	4	666	54.7	**667**	**54.6**	671	54.3
435.gromacs	4	374	76.4	373	76.5	**373**	**76.5**	4	**373**	**76.6**	371	76.9	374	76.3
436.cactusADM	4	**887**	**53.9**	882	54.2	889	53.8	1	184	65.1	186	64.3	**184**	**64.8**
437.leslie3d	4	1394	27.0	1387	27.1	**1391**	**27.0**	4	1336	28.2	**1334**	**28.2**	1334	28.2
444.namd	4	**507**	**63.2**	507	63.3	511	62.8	4	**505**	**63.6**	506	63.4	505	63.6
447.dealII	4	526	87.0	**514**	**89.1**	513	89.3	4	**488**	**93.8**	482	94.9	489	93.7
450.soplex	4	1070	31.2	1064	31.4	**1065**	**31.3**	4	961	34.7	962	34.7	**961**	**34.7**
453.povray	4	**218**	**97.6**	218	97.5	216	98.4	4	182	117	184	116	**183**	**116**
454.calculix	4	**524**	**62.9**	526	62.8	524	63.0	4	362	91.1	369	89.3	**366**	**90.1**
459.GemsFDTD	4	1645	25.8	1672	25.4	**1649**	**25.7**	4	**1613**	**26.3**	1613	26.3	1612	26.3
465.tonto	4	**531**	**74.2**	529	74.4	531	74.2	4	**514**	**76.5**	513	76.7	515	76.4
470.lbm	4	2908	18.9	**2908**	**18.9**	2907	18.9	2	691	39.8	690	39.9	**691**	**39.8**
481.wrf	4	873	51.2	875	51.1	**874**	**51.1**	4	873	51.2	**874**	**51.1**	876	51.0
482.sphinx3	4	1621	48.1	1627	47.9	**1623**	**48.0**	2	724	53.8	**715**	**54.5**	714	54.6

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Operating System Notes

'ulimit -s unlimited' was used to set the stacksize to unlimited prior to run
'OMP_NUM_THREADS' set to number of cores (default)

General Notes

This result has been produced with binaries provided and compiled by Intel.

All binaries were built with 64-bit Intel compiler except:
437.leslie3d, 450.soplex, 470.lbm and 482.sphinx3 in peak were built with
32-bit Intel compiler by changing the path for include and library files.

For information about Fujitsu Siemens Computers please see:

Continued on next page

General Notes (Continued)

http://www.fujitsu-siemens.com

Base Compiler Invocation

C benchmarks:
icc

C++ benchmarks:
icpc

Fortran benchmarks:
ifort

Benchmarks using both Fortran and C:
icc ifort

Base Portability Flags

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
450.soplex: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64

Base Optimization Flags

C benchmarks:
-fast

C++ benchmarks:
-fast

Fortran benchmarks:
-fast

Continued on next page

Base Optimization Flags (Continued)

Benchmarks using both Fortran and C:
`-fast`

Peak Compiler Invocation

C benchmarks (except as noted below):
`/home/cmplr/usr3/alrahate/compilers/ic10.1mainline/20070725/Linux32/bin/icc`
`-L/home/cmplr/usr3/alrahate/compilers/ic10.1mainline/20070725/Linux32/lib`
`-I/home/cmplr/usr3/alrahate/compilers/ic10.1mainline/20070725/Linux32/include`

433.milc: `icc`

C++ benchmarks (except as noted below):
`icpc`

450.soplex: `/home/cmplr/usr3/alrahate/compilers/ic10.1mainline/20070725/Linux32/bin/icpc`
`-L/home/cmplr/usr3/alrahate/compilers/ic10.1mainline/20070725/Linux32/lib`
`-I/home/cmplr/usr3/alrahate/compilers/ic10.1mainline/20070725/Linux32/include`

Fortran benchmarks (except as noted below):
`ifort`

437.leslie3d: `/home/cmplr/usr3/alrahate/compilers/ic10.1mainline/20070725/Linux32/bin/ifort`
`-L/home/cmplr/usr3/alrahate/compilers/ic10.1mainline/20070725/Linux32/lib`
`-I/home/cmplr/usr3/alrahate/compilers/ic10.1mainline/20070725/Linux32/include`

Benchmarks using both Fortran and C:
`icc ifort`

Peak Portability Flags

410.bwaves: `-DSPEC_CPU_LP64`
416.gamess: `-DSPEC_CPU_LP64`
433.milc: `-DSPEC_CPU_LP64`
434.zeusmp: `-DSPEC_CPU_LP64`
435.gromacs: `-DSPEC_CPU_LP64 -nofor_main`
436.cactusADM: `-DSPEC_CPU_LP64 -nofor_main`
444.namd: `-DSPEC_CPU_LP64`
447.dealII: `-DSPEC_CPU_LP64`
453.povray: `-DSPEC_CPU_LP64`
454.calculix: `-DSPEC_CPU_LP64 -nofor_main`
459.GemsFDTD: `-DSPEC_CPU_LP64`
465.tonto: `-DSPEC_CPU_LP64`
481.wrf: `-DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX`

Peak Optimization Flags

C benchmarks:

433.milc: -prof-gen(pass 1) -prof-use(pass 2) -fast -fno-alias -auto-ilp32

470.lbm: -prof-gen(pass 1) -prof-use(pass 2) -fast -unroll2 -scalar-rep- -prefetch -opt-malloc-options=3

482.sphinx3: -fast -unroll2

C++ benchmarks:

444.namd: -prof-gen(pass 1) -prof-use(pass 2) -fast -fno-alias -auto-ilp32

447.dealII: -prof-gen(pass 1) -prof-use(pass 2) -fast -unroll2 -ansi-alias -scalar-rep-

450.soplex: -prof-gen(pass 1) -prof-use(pass 2) -fast -opt-malloc-options=3

453.povray: -prof-gen(pass 1) -prof-use(pass 2) -fast -unroll4 -ansi-alias

Fortran benchmarks:

410.bwaves: -fast -prefetch

416.gamess: -prof-gen(pass 1) -prof-use(pass 2) -fast -unroll2 -Ob0 -ansi-alias -scalar-rep-

434.zeusmp: -prof-gen(pass 1) -prof-use(pass 2) -fast

437.leslie3d: -prof-gen(pass 1) -prof-use(pass 2) -fast -prefetch -opt-malloc-options=3

459.GemsFDTD: -prof-gen(pass 1) -prof-use(pass 2) -fast -unroll2 -Ob0 -prefetch

465.tonto: -prof-gen(pass 1) -prof-use(pass 2) -fast -unroll4 -auto

Benchmarks using both Fortran and C:

435.gromacs: -prof-gen(pass 1) -prof-use(pass 2) -fast -prefetch -auto-ilp32

436.cactusADM: -prof-gen(pass 1) -prof-use(pass 2) -fast -unroll2 -prefetch -parallel -auto-ilp32

Continued on next page

Peak Optimization Flags (Continued)

454.calculix: `-fast -unroll-aggressive -auto-ilp32`

481.wrf: `-fast -auto-ilp32`

The flags file that was used to format this result can be browsed at
`http://www.spec.org/cpu2006/flags/Intel-ic10.1-FP-intel64-linux-flags.20090714.01.html`

You can also download the XML flags source by saving the following link:
`http://www.spec.org/cpu2006/flags/Intel-ic10.1-FP-intel64-linux-flags.20090714.01.xml`

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.0.
Report generated on Tue Jul 22 17:11:17 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 13 May 2008.