SPEC® CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Bull SAS

NovaScale R460 E1
(Intel Xeon X5450,3.00GHz)

SPECfp®_rate2006 = 74.1

SPECfp_rate_base2006 = 65.9

CPU2006 license: 20
Test sponsor: Bull SAS
Tested by: NEC Corporation

Test date: Jan-2008
Hardware Availability: Dec-2007
Software Availability: Nov-2007

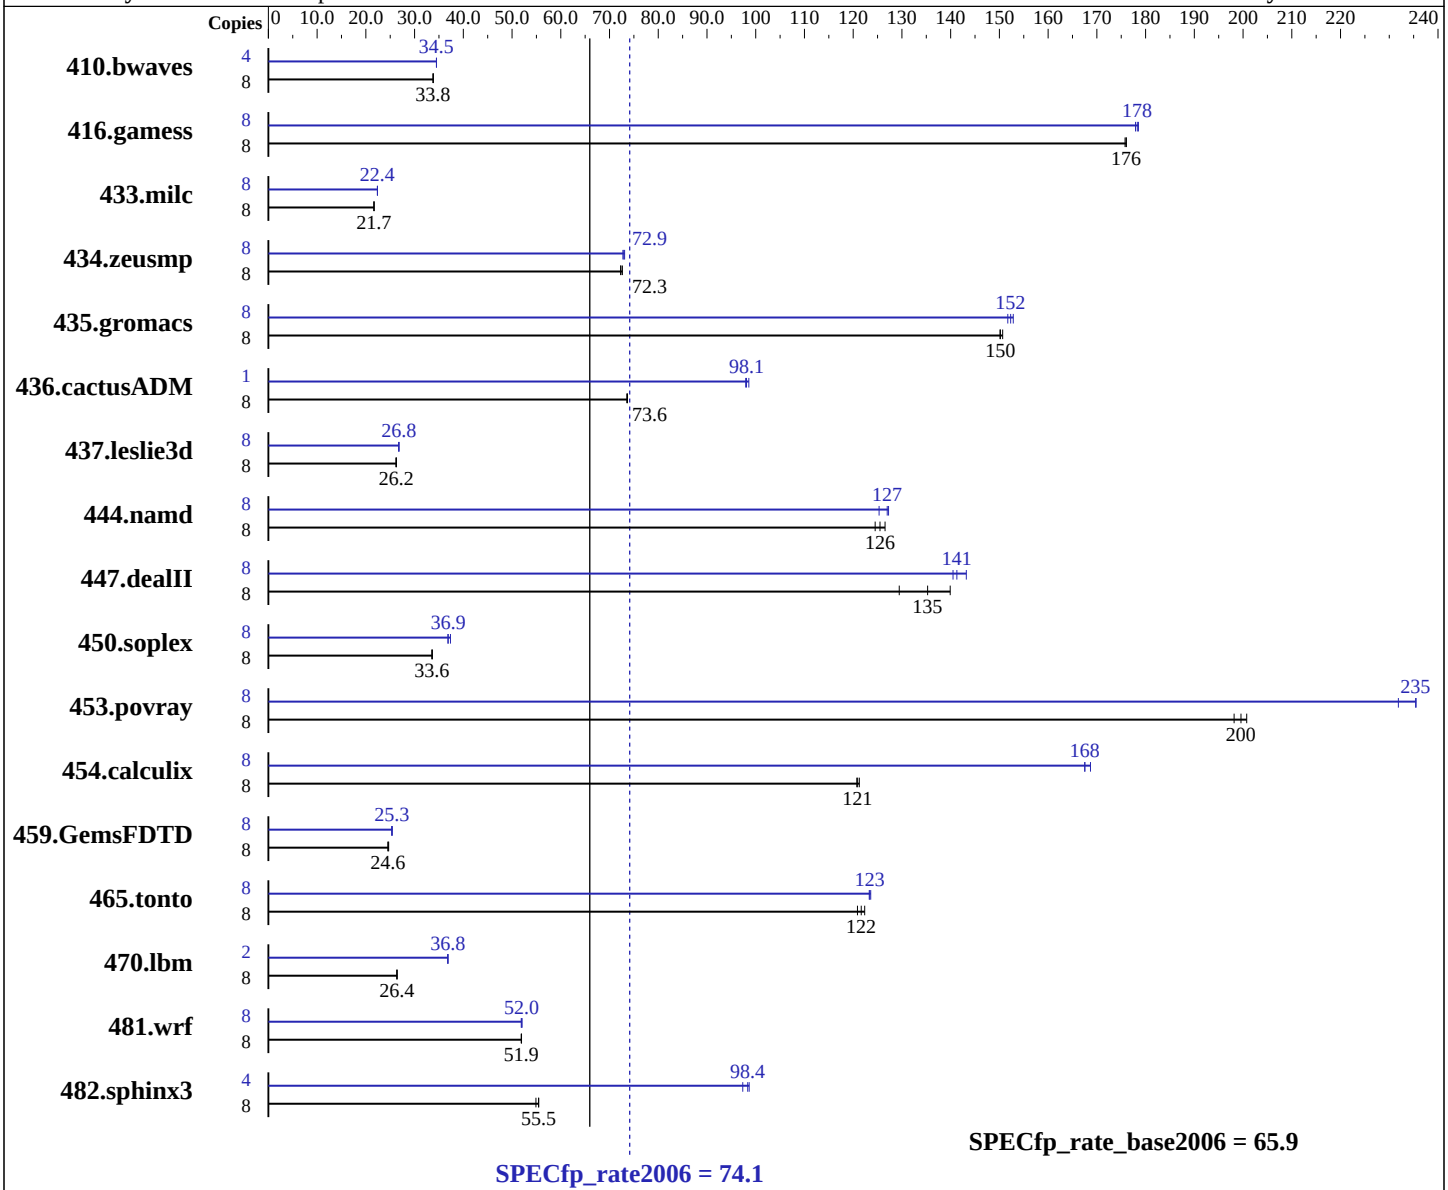

Hardware

CPU Name:	Intel Xeon X5450
CPU Characteristics:	3.00 GHz, 2x6 MB L2 shared, 1333 MHz bus
CPU MHz:	3000
FPU:	Integrated
CPU(s) enabled:	8 cores, 2 chips, 4 cores/chip
CPU(s) orderable:	1,2 chips
Primary Cache:	32 KB I + 32 KB D on chip per core
Secondary Cache:	12 MB I+D on chip per chip, 6 MB shared / 2 cores

Continued on next page

Software

Operating System:	SUSE Linux Enterprise Server 10 (x86_64) SP1, Kernel 2.6.16.46-0.12-smp
Compiler:	Intel C++ and Fortran Compiler for Linux32 and Linux64 version 10.1 Build 20070913 Package ID: l_cc_p_10.1.008, l_fc_p_10.1.008
Auto Parallel:	Yes
File System:	ext2

Continued on next page

SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Bull SAS

NovaScale R460 E1
(Intel Xeon X5450,3.00GHz)

SPECfp_rate2006 = 74.1

SPECfp_rate_base2006 = 65.9

CPU2006 license: 20
Test sponsor: Bull SAS
Tested by: NEC Corporation

Test date: Jan-2008
Hardware Availability: Dec-2007
Software Availability: Nov-2007

L3 Cache: None
Other Cache: None
Memory: 12 GB (12x1 GB PC2-5300F, 2 rank, CL5-5-5, ECC)
Disk Subsystem: 1x73.2 GB SAS, 15000RPM
Other Hardware: None

System State: Run level 3 (multi-user)
Base Pointers: 64-bit
Peak Pointers: 32/64-bit
Other Software: binutils-2.17.tar.gz, Version 2.17

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	8	3217	33.8	**3215**	**33.8**	3214	33.8	4	1576	34.5	1576	34.5	**1576**	**34.5**
416.gamess	8	**890**	**176**	890	176	891	176	8	877	179	880	178	**879**	**178**
433.milc	8	3389	21.7	3387	21.7	**3388**	**21.7**	8	**3281**	**22.4**	3284	22.4	3280	22.4
434.zeusmp	8	**1006**	**72.3**	1007	72.3	1002	72.6	8	**998**	**72.9**	1001	72.7	996	73.1
435.gromacs	8	**380**	**150**	379	151	380	150	8	376	152	**375**	**152**	374	153
436.cactusADM	8	**1299**	**73.6**	1297	73.7	1299	73.6	1	122	97.9	121	98.6	**122**	**98.1**
437.leslie3d	8	**2868**	**26.2**	2872	26.2	2862	26.3	8	2811	26.7	**2809**	**26.8**	2806	26.8
444.namd	8	507	127	515	125	**511**	**126**	8	512	125	**505**	**127**	504	127
447.dealII	8	**677**	**135**	707	129	654	140	8	639	143	**648**	**141**	651	140
450.soplex	8	1987	33.6	**1987**	**33.6**	1983	33.6	8	1811	36.8	**1808**	**36.9**	1786	37.4
453.povray	8	**213**	**200**	215	198	212	201	8	**181**	**235**	184	232	181	236
454.calculix	8	**546**	**121**	544	121	547	121	8	391	169	**394**	**168**	394	168
459.GemsFDTD	8	**3457**	**24.6**	3439	24.7	3458	24.5	8	3338	25.4	3354	25.3	**3349**	**25.3**
465.tonto	8	**647**	**122**	651	121	643	122	8	**638**	**123**	637	124	638	123
470.lbm	8	4159	26.4	**4167**	**26.4**	4170	26.4	2	746	36.9	747	36.8	**746**	**36.8**
481.wrf	8	1722	51.9	**1721**	**51.9**	1720	51.9	8	1722	51.9	**1719**	**52.0**	1717	52.0
482.sphinx3	8	**2812**	**55.5**	2840	54.9	2812	55.5	4	801	97.3	790	98.7	**793**	**98.4**

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Operating System Notes

```
'ulimit -s unlimited' was used to set the stacksize to unlimited prior to run
'/usr/bin/taskset' used to bind processes to CPUs
OMP_NUM_THREADS set to number of cores (default).
```

Platform Notes

```
Bios settings:
Intel SpeedStep Technology: Disabled
```

General Notes

```
All benchmarks compiled in 64-bit mode except 437.leslie3d,
450.soplex, 470.lbm and 482.sphinx3, for peak, are
compiled in 32-bit mode
 The NEC Express5800/120Rh-1(Intel Xeon Prosessor X5450),
 the NEC Express5800/120Rj-2(Intel Xeon Prosessor X5450),
 the Bull NovaScale R440 E1 (Intel Xeon X5450,3.00GHz) and
 the Bull NovaScale R460 E1 (Intel Xeon X5450,3.00GHz) models are electronically equivalent.
 The results have been measured on a NEC Express5800/120Rj-2(Intel Xeon Prosessor X5450) model.
```

Base Compiler Invocation

C benchmarks:
`icc`

C++ benchmarks:
`icpc`

Fortran benchmarks:
`ifort`

Benchmarks using both Fortran and C:
`icc ifort`

Base Portability Flags

410.bwaves:	`-DSPEC_CPU_LP64`
416.gamess:	`-DSPEC_CPU_LP64`
433.milc:	`-DSPEC_CPU_LP64`
434.zeusmp:	`-DSPEC_CPU_LP64`
435.gromacs:	`-DSPEC_CPU_LP64 -nofor_main`
436.cactusADM:	`-DSPEC_CPU_LP64 -nofor_main`
437.leslie3d:	`-DSPEC_CPU_LP64`
444.namd:	`-DSPEC_CPU_LP64`
447.dealII:	`-DSPEC_CPU_LP64`
450.soplex:	`-DSPEC_CPU_LP64`
453.povray:	`-DSPEC_CPU_LP64`
454.calculix:	`-DSPEC_CPU_LP64 -nofor_main`
459.GemsFDTD:	`-DSPEC_CPU_LP64`
465.tonto:	`-DSPEC_CPU_LP64`
470.lbm:	`-DSPEC_CPU_LP64`
481.wrf:	`-DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX`
482.sphinx3:	`-DSPEC_CPU_LP64`

Base Optimization Flags

C benchmarks:
`-fast`

C++ benchmarks:
`-fast`

Fortran benchmarks:
`-fast`

Benchmarks using both Fortran and C:
`-fast`

Peak Compiler Invocation

C benchmarks (except as noted below):
`/opt/intel/cc/10.1.008/bin/icc -L/opt/intel/cc/10.1.008/lib -I/opt/intel/cc/10.1.008/include`

433.milc: `icc`

C++ benchmarks (except as noted below):
`icpc`

450.soplex: `/opt/intel/cc/10.1.008/bin/icpc -L/opt/intel/cc/10.1.008/lib -I/opt/intel/cc/10.1.008/include`

Fortran benchmarks (except as noted below):
`ifort`

437.leslie3d: `/opt/intel/fc/10.1.008/bin/ifort -L/opt/intel/fc/10.1.008/lib -I/opt/intel/fc/10.1.008/include`

Benchmarks using both Fortran and C:
`icc ifort`

Peak Portability Flags

410.bwaves: `-DSPEC_CPU_LP64`
416.gamess: `-DSPEC_CPU_LP64`
433.milc: `-DSPEC_CPU_LP64`
434.zeusmp: `-DSPEC_CPU_LP64`
435.gromacs: `-DSPEC_CPU_LP64 -nofor_main`
436.cactusADM: `-DSPEC_CPU_LP64 -nofor_main`
444.namd: `-DSPEC_CPU_LP64`
447.dealII: `-DSPEC_CPU_LP64`

Continued on next page

Peak Portability Flags (Continued)

453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX

Peak Optimization Flags

C benchmarks:

433.milc: -prof-gen(pass 1) -prof-use(pass 2) -fast -fno-alias -auto-ilp32

470.lbm: -prof-gen(pass 1) -prof-use(pass 2) -fast -unroll2 -scalar-rep- -prefetch -opt-malloc-options=3

482.sphinx3: -fast -unroll2

C++ benchmarks:

444.namd: -prof-gen(pass 1) -prof-use(pass 2) -fast -fno-alias -auto-ilp32

447.dealII: -prof-gen(pass 1) -prof-use(pass 2) -fast -unroll2 -ansi-alias -scalar-rep-

450.soplex: -prof-gen(pass 1) -prof-use(pass 2) -fast -opt-malloc-options=3

453.povray: -prof-gen(pass 1) -prof-use(pass 2) -fast -unroll4 -ansi-alias

Fortran benchmarks:

410.bwaves: -fast -prefetch

416.gamess: -prof-gen(pass 1) -prof-use(pass 2) -fast -unroll2 -Ob0 -ansi-alias -scalar-rep-

434.zeusmp: -prof-gen(pass 1) -prof-use(pass 2) -fast

437.leslie3d: -prof-gen(pass 1) -prof-use(pass 2) -fast -prefetch -opt-malloc-options=3

459.GemsFDTD: -prof-gen(pass 1) -prof-use(pass 2) -fast -unroll2 -Ob0 -prefetch

Continued on next page

Peak Optimization Flags (Continued)

465.tonto: `-prof-gen`(pass 1) `-prof-use`(pass 2) `-fast -unroll4 -auto`

Benchmarks using both Fortran and C:

435.gromacs: `-prof-gen`(pass 1) `-prof-use`(pass 2) `-fast -prefetch -auto-ilp32`

436.cactusADM: `-prof-gen`(pass 1) `-prof-use`(pass 2) `-fast -unroll2 -prefetch -parallel -auto-ilp32`

454.calculix: `-fast -unroll-aggressive -auto-ilp32`

481.wrf: `-fast -auto-ilp32`

The flags file that was used to format this result can be browsed at
`http://www.spec.org/cpu2006/flags/NEC-Intel-ic10.1-FP-intel64-linux-flags.20090713.00.html`

You can also download the XML flags source by saving the following link:
`http://www.spec.org/cpu2006/flags/NEC-Intel-ic10.1-FP-intel64-linux-flags.20090713.00.xml`

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.0.
Report generated on Tue Jul 22 18:01:55 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 17 April 2008.