



SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Sun Microsystems
Sun Fire X4140

SPECint_rate2006 = 60.2
SPECint_rate_base2006 = 52.8

CPU2006 license: 6


Test sponsor: Sun Microsystems

Tested by: Sun Microsystems

Test date: Mar-2008

Hardware Availability: Apr-2008

Software Availability: Dec-2007

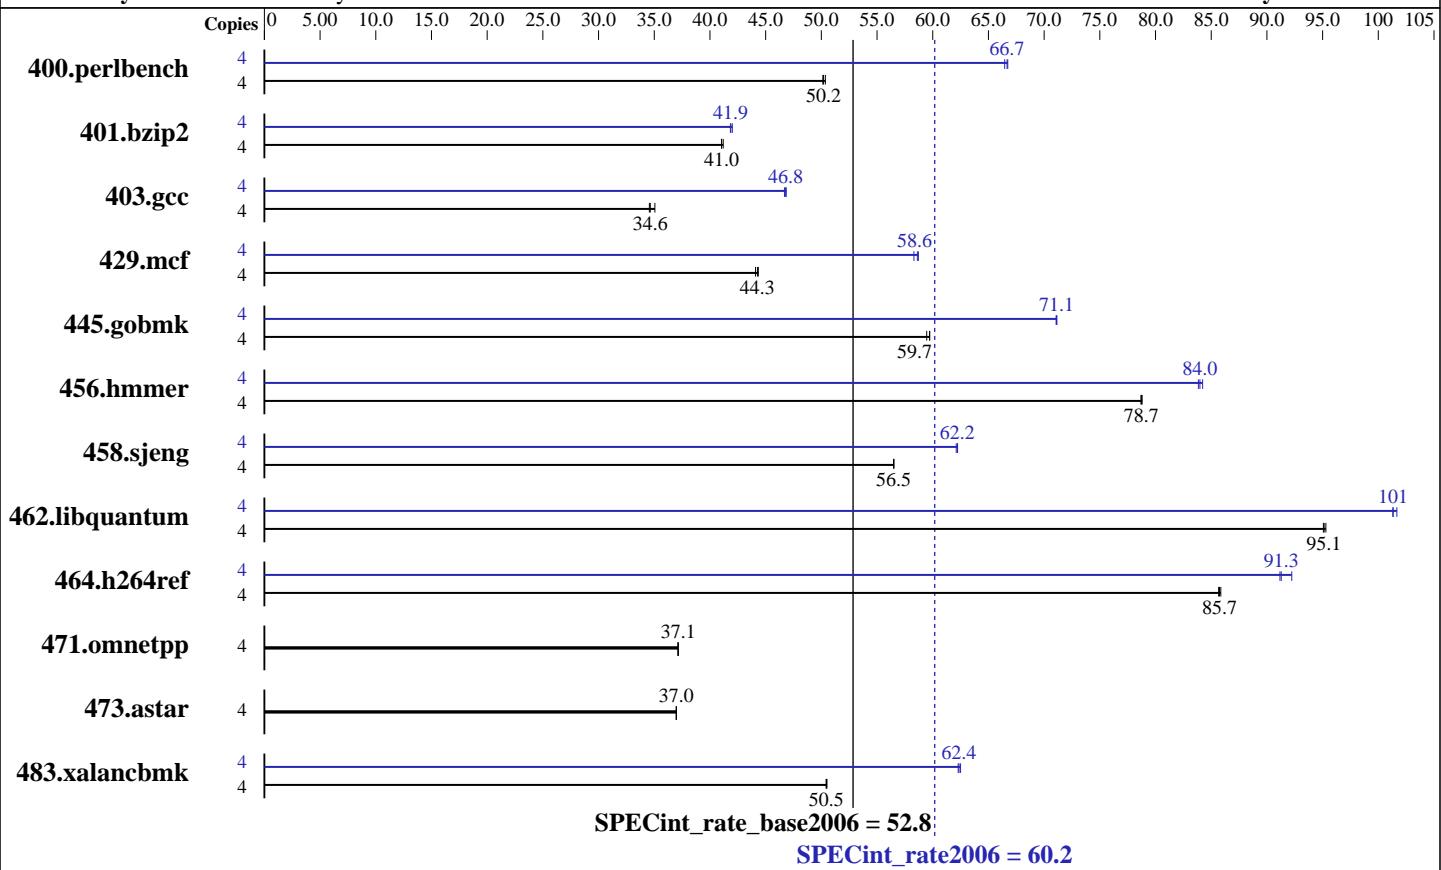

Hardware

CPU Name: AMD Opteron 2222
CPU Characteristics: 3000
CPU MHz: 3000
FPU: Integrated
CPU(s) enabled: 4 cores, 2 chips, 2 cores/chip
CPU(s) orderable: 1,2 chips
Primary Cache: 64 KB I + 64 KB D on chip per core
Secondary Cache: 1 MB I+D on chip per core
L3 Cache: None
Other Cache: None
Memory: 16 GB (8x2GB, DDR2-667 CL5 Reg Dual Rank)
Disk Subsystem: SAS, 72 GB, 10 K RPM
Other Hardware: None

Software

Operating System: SuSE Linux Enterprise Server 10 SP1 64-bit kernel
Compiler: The Portland Group (PGI)
PGI pgcc 7.1-3 C Compiler
PGI pgCC 7.1-3 C++ Compiler
The PathScale Compiler v3.0
PathScale pathcc 3.0 C Compiler
PathScale pathCC 3.0 C++ Compiler
Auto Parallel: No
File System: ReiserFS
System State: Multi-user, run level 3
Base Pointers: 32/64-bit
Peak Pointers: 32/64-bit
Other Software: SmartHeap 8.1 32-bit Library for Linux



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

**Sun Microsystems
Sun Fire X4140**

SPECint_rate2006 = 60.2

SPECint_rate_base2006 = 52.8

CPU2006 license: 6

Test date: Mar-2008

Test sponsor: Sun Microsystems

Hardware Availability: Apr-2008

Tested by: Sun Microsystems

Software Availability: Dec-2007

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	4	776	50.4	778	50.2	780	50.1	4	586	66.7	588	66.5	586	66.7
401.bzip2	4	940	41.0	940	41.0	937	41.2	4	919	42.0	922	41.9	923	41.8
403.gcc	4	919	35.1	932	34.6	930	34.6	4	688	46.8	690	46.7	687	46.8
429.mcf	4	823	44.3	827	44.1	824	44.3	4	626	58.3	621	58.7	622	58.6
445.gobmk	4	706	59.5	703	59.7	703	59.7	4	590	71.1	590	71.1	590	71.1
456.hmmer	4	474	78.7	474	78.8	474	78.7	4	443	84.2	445	83.8	444	84.0
458.sjeng	4	857	56.5	857	56.5	857	56.5	4	778	62.2	779	62.1	778	62.2
462.libquantum	4	870	95.3	871	95.1	872	95.1	4	815	102	818	101	818	101
464.h264ref	4	1031	85.9	1032	85.7	1033	85.7	4	960	92.2	970	91.3	971	91.2
471.omnetpp	4	673	37.1	673	37.1	673	37.1	4	673	37.1	673	37.1	673	37.1
473.astar	4	759	37.0	760	37.0	759	37.0	4	759	37.0	760	37.0	759	37.0
483.xalancbmk	4	546	50.5	547	50.5	547	50.4	4	442	62.5	443	62.3	443	62.4

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Operating System Notes

'ulimit -s unlimited' used to set environment stack size
 'ulimit -l 2457600' was used to set environment lock pages quantity
 'numactl' was used to bind copies to the cores
 Set vm.nr_hugepages=1200 in /etc/sysctl.conf
 mount -t hugetlbfs nodev /mnt/hugepages
 Environment variable PGI_HUGE_PAGES set to 150

Platform Notes

Default BIOS configurations were used.

Base Compiler Invocation

C benchmarks:
 pgcc

C++ benchmarks:
 pgcpp

Base Portability Flags

400.perlbench: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX_X64

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Sun Microsystems
Sun Fire X4140

SPECint_rate2006 = 60.2
SPECint_rate_base2006 = 52.8

CPU2006 license: 6

Test sponsor: Sun Microsystems

Tested by: Sun Microsystems

Test date: Mar-2008

Hardware Availability: Apr-2008

Software Availability: Dec-2007

Base Portability Flags (Continued)

```
401.bzip2: -DSPEC_CPU_LP64
403.gcc: -DSPEC_CPU_LP64
429.mcf: -DSPEC_CPU_LP64
445.gobmk: -DSPEC_CPU_LP64
456.hmmer: -DSPEC_CPU_LP64
458.sjeng: -DSPEC_CPU_LP64
462.libquantum: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX
464.h264ref: -DSPEC_CPU_LP64
483.xalancbmk: -DSPEC_CPU_LINUX
```

Base Optimization Flags

C benchmarks:

```
-fast -Mipa=fast -Mipa=inline -Mipa=noarg -Mfprelaxed
-Msmartalloc=huge:840 -tp k8-64 -Bstatic_pgi
```

C++ benchmarks:

```
-fastsse -Mipa=fast -Mipa=inline -Mfprelaxed -Msmartalloc=huge:448
--zc_eh -tp k8 -Bstatic_pgi
```

Base Other Flags

C benchmarks:

```
-w
```

C++ benchmarks:

```
-w
```

Peak Compiler Invocation

C benchmarks (except as noted below):

```
pgcc
```

400.perlbench: pathcc

403.gcc: pathcc

445.gobmk: pathcc

464.h264ref: pathcc

C++ benchmarks (except as noted below):

```
pgcpp
```

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Sun Microsystems
Sun Fire X4140

SPECint_rate2006 = 60.2
SPECint_rate_base2006 = 52.8

CPU2006 license: 6

Test sponsor: Sun Microsystems

Tested by: Sun Microsystems

Test date: Mar-2008

Hardware Availability: Apr-2008

Software Availability: Dec-2007

Peak Compiler Invocation (Continued)

483.xalancbmk: pathCC

Peak Portability Flags

400.perlbench: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX_X64
401.bzip2: -DSPEC_CPU_LP64
445.gobmk: -DSPEC_CPU_LP64
456.hmmmer: -DSPEC_CPU_LP64
458.sjeng: -DSPEC_CPU_LP64
462.libquantum: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX
464.h264ref: -DSPEC_CPU_LP64
483.xalancbmk: -DSPEC_CPU_LINUX

Peak Optimization Flags

C benchmarks:

400.perlbench: -fb_create fbdata(pass 1) -fb_opt fbdata(pass 2) -Ofast
-LNO:opt=0

401.bzip2: -Mpfi(pass 1) -Mpfo(pass 2) -fast -O4
-Msmartralloc=huge:448 -tp k8-64 -Bstatic_pgi

403.gcc: -fb_create fbdata(pass 1) -fb_opt fbdata(pass 2) -m32 -O3
-OPT:Ofast

429.mcf: -fastsse -Mipa=fast -Mipa=inline:1 -Msmartralloc=huge:420
-tp k8 -Bstatic_pgi

445.gobmk: -fb_create fbdata(pass 1) -fb_opt fbdata(pass 2) -O3
-OPT:alias=disjoint -LNO:simd=0 -LNO:minvariant=off
-WOPT:retype_expr=on

456.hmmmer: -fast -Msmartralloc=huge:448 -Mfprelaxed -Msafeptr
-Mipa=const -Mipa=ptr -Mipa=arg -tp k8-64 -Bstatic_pgi

458.sjeng: -Mpfi(pass 1) -Mipa=fast(pass 2) -Mipa=inline:1(pass 2)
-Mipa=noarg(pass 2) -Mpfo(pass 2) -fast
-Msmartralloc=huge:448 -Mfprelaxed -tp k8-64 -Bstatic_pgi

462.libquantum: -fast -Mfprelaxed -Msmartralloc=huge:448 -Munroll=m:4
-Mipa=fast -Mipa=inline -Mipa=noarg -Bstatic_pgi

464.h264ref: -fb_create fbdata(pass 1) -fb_opt fbdata(pass 2) -O3
-IPA:plimit=20000 -OPT:alias=disjoint -LNO:prefetch=0

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Sun Microsystems
Sun Fire X4140

SPECint_rate2006 = 60.2
SPECint_rate_base2006 = 52.8

CPU2006 license: 6

Test sponsor: Sun Microsystems

Tested by: Sun Microsystems

Test date: Mar-2008

Hardware Availability: Apr-2008

Software Availability: Dec-2007

Peak Optimization Flags (Continued)

C++ benchmarks:

471.omnetpp: basepeak = yes

473.astar: basepeak = yes

483.xalancbmk: -Ofast -m32 -OPT:unroll_times_max=8
-L:/data1/SmartHeap_8.1/lib -lsmartheap

Peak Other Flags

C benchmarks (except as noted below):

-w

400.perlbench: No flags used

403.gcc: No flags used

445.gobmk: No flags used

464.h264ref: No flags used

C++ benchmarks (except as noted below):

-w

483.xalancbmk: No flags used

The flags file that was used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/amd814GH-flags.html>

You can also download the XML flags source by saving the following link:

<http://www.spec.org/cpu2006/flags/amd814GH-flags.xml>

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.0.

Report generated on Tue Jul 22 17:23:36 2014 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 18 April 2008.