SPEC® CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Fujitsu Limited
PRIMEQUEST 580A

SPECfp®_rate2006 = 683

SPECfp_rate_base2006 = 667

CPU2006 license: 19
Test sponsor: Fujitsu Limited
Tested by: Fujitsu Limited

Test date: Mar-2008
Hardware Availability: May-2008
Software Availability: Feb-2008

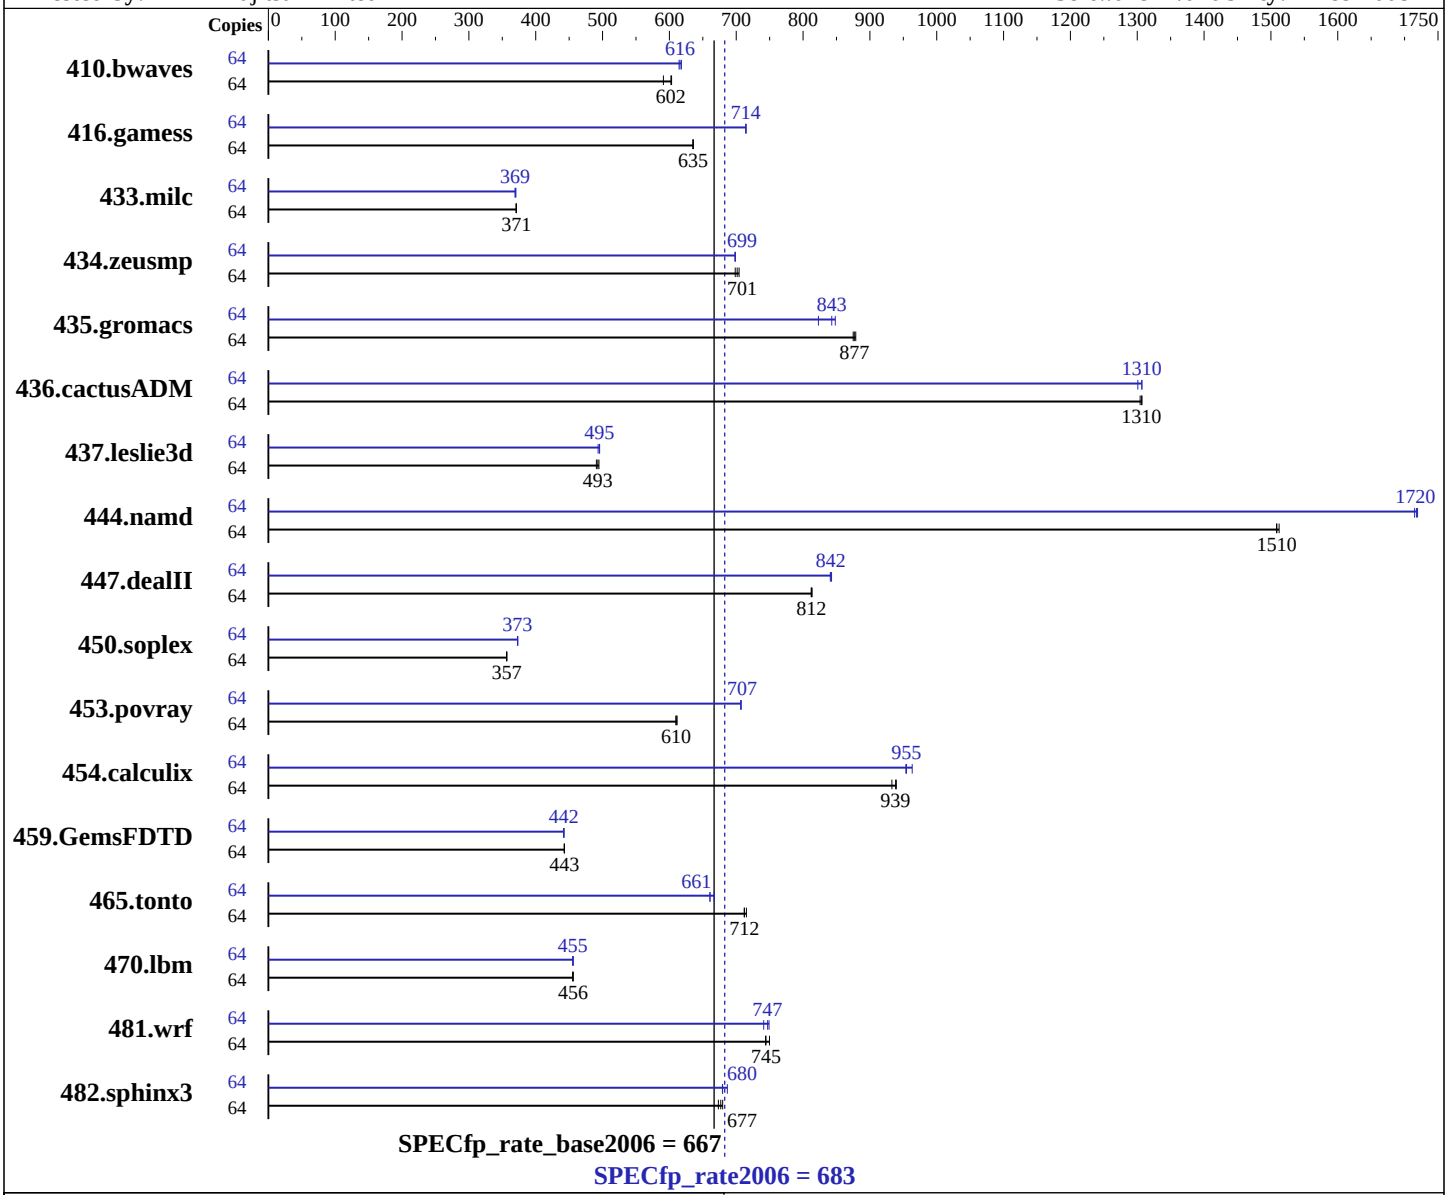

Hardware

CPU Name:	Dual-Core Intel Itanium 9130M
CPU Characteristics:	1.66GHz/8MB, 667MHz FSB
CPU MHz:	1667
FPU:	Integrated
CPU(s) enabled:	64 cores, 32 chips, 2 cores/chip
CPU(s) orderable:	2-32 chips
Primary Cache:	16 KB I + 16 KB D on chip per core
Secondary Cache:	1 MB I + 256 KB D on chip per core

Continued on next page

Software

Operating System:	Red Hat Enterprise Linux 5.1, Kernel 2.6.18-53.el5 on an ia64
Compiler:	Intel C++ Compiler for Linux 10.1 (Build 20080112) Intel Fortran Compiler for Linux 10.1 (Build 20080112)
Auto Parallel:	No
File System:	ext2

Continued on next page

SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Fujitsu Limited
PRIMEQUEST 580A

SPECfp_rate2006 = 683

SPECfp_rate_base2006 = 667

CPU2006 license: 19
Test sponsor: Fujitsu Limited
Tested by: Fujitsu Limited

Test date: Mar-2008
Hardware Availability: May-2008
Software Availability: Feb-2008

L3 Cache: 4 MB I+D on chip per core
Other Cache: None
Memory: 512 GB (256 x 2GB DDR2-667 DIMMs)
Disk Subsystem: 2 x 147GB (SCSI Ultra 320, 10000rpm)
No RAID configuration
Other Hardware: None

System State: Runlevel 1 (single user mode)
Base Pointers: 64-bit
Peak Pointers: 32/64-bit
Other Software: None

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	64	1472	591	**1444**	**602**	1442	603	64	1407	618	**1412**	**616**	1415	615
416.gamess	64	1971	636	**1972**	**635**	1973	635	64	1754	714	1754	715	**1754**	**714**
433.milc	64	1586	370	1583	371	**1583**	**371**	64	**1591**	**369**	1591	369	1586	370
434.zeusmp	64	834	698	**830**	**701**	827	704	64	834	699	**834**	**699**	834	698
435.gromacs	64	520	879	522	875	**521**	**877**	64	539	848	555	823	**542**	**843**
436.cactusADM	64	**585**	**1310**	585	1310	586	1300	64	588	1300	**585**	**1310**	585	1310
437.leslie3d	64	1216	495	**1220**	**493**	1226	491	64	**1215**	**495**	1214	496	1219	493
444.namd	64	339	1510	340	1510	**340**	**1510**	64	**299**	**1720**	299	1720	299	1710
447.dealII	64	901	812	900	814	**901**	**812**	64	871	841	869	843	**870**	**842**
450.soplex	64	1498	356	1496	357	**1497**	**357**	64	1430	373	**1431**	**373**	1432	373
453.povray	64	559	610	557	612	**558**	**610**	64	482	707	**482**	**707**	482	707
454.calculix	64	562	940	**563**	**939**	566	933	64	**553**	**955**	554	954	548	963
459.GemsFDTD	64	**1533**	**443**	1533	443	1534	443	64	1535	442	**1536**	**442**	1538	442
465.tonto	64	880	715	884	712	**884**	**712**	64	**953**	**661**	953	661	944	667
470.lbm	64	**1929**	**456**	1932	455	1928	456	64	1927	456	**1931**	**455**	1931	455
481.wrf	64	953	750	961	744	**960**	**745**	64	954	749	**957**	**747**	965	741
482.sphinx3	64	1853	673	**1843**	**677**	1835	680	64	**1835**	**680**	1816	687	1836	679

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

General Notes

```
Processes are bound to CPUs using taskset.

limit stacksize unlimited

Memory system is in "Non Mirror Mode".

The following 2 environment variables were set
    MALLOC_MMAP_MAX_=0
    MALLOC_TRIM_THRESHOLD_=-1
This will cause use of sbrk() calls instead of
mmap() calls to get memory from the system.
```

Base Compiler Invocation

C benchmarks:
icc

C++ benchmarks:
icpc

Fortran benchmarks:
ifort

Benchmarks using both Fortran and C:
icc ifort

Base Portability Flags

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
450.soplex: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX -DSPEC_CPU_CASE_FLAG
482.sphinx3: -DSPEC_CPU_LP64

Base Optimization Flags

C benchmarks:
-fast -IPF_fp_relaxed -opt-prefetch-next-iteration -ansi-alias

C++ benchmarks:
-fast -IPF_fp_relaxed -opt-prefetch-next-iteration -ansi-alias

Fortran benchmarks:
-fast -IPF-fp-relaxed -opt-prefetch-next-iteration

Benchmarks using both Fortran and C:
-fast -IPF_fp_relaxed -opt-prefetch-next-iteration -ansi-alias
-IPF-fp-relaxed

Peak Compiler Invocation

C benchmarks:
icc

C++ benchmarks:
icpc

Fortran benchmarks:
ifort

Benchmarks using both Fortran and C:
icc ifort

Peak Portability Flags

Same as Base Portability Flags

Peak Optimization Flags

C benchmarks:

433.milc: -fast -IPF-fp-relaxed -opt-prefetch-next-iteration
-fno-alias -ansi-alias

470.lbm: -fast -IPF-fp-relaxed -opt-prefetch-next-iteration
-ansi-alias

482.sphinx3: -prof-gen(pass 1) -prof-use(pass 2) -fast -IPF-fp-relaxed
-opt-prefetch-next-iteration -fno-alias
-no-opt-prefetch-initial-values -ansi-alias

C++ benchmarks:

444.namd: -prof-gen(pass 1) -prof-use(pass 2) -fast -IPF-fp-relaxed
-opt-prefetch-next-iteration -no-prefetch -auto-ilp32
-fno-alias -ansi-alias

447.dealII: -fast -IPF-fp-relaxed -opt-prefetch-next-iteration
-inline-factor=150 -no-alias-args -no-opt-loadpair
-ansi-alias

450.soplex: -prof-gen(pass 1) -prof-use(pass 2) -fast -IPF-fp-relaxed
-opt-prefetch-next-iteration -auto-ilp32 -no-alias-args
-ansi-alias

453.povray: -prof-gen(pass 1) -prof-use(pass 2) -fast -IPF-fp-relaxed
-opt-prefetch-next-iteration -inline-factor=150 -ansi-alias

Continued on next page

Peak Optimization Flags (Continued)

Fortran benchmarks:

410.bwaves: -prof-gen(pass 1) -prof-use(pass 2) -fast -IPF-fp-relaxed
-opt-prefetch-next-iteration

416.gamess: -prof-gen(pass 1) -prof-use(pass 2) -fast -IPF-fp-relaxed
-opt-prefetch-next-iteration -no-prefetch

434.zeusmp: Same as 410.bwaves

437.leslie3d: -prof-gen(pass 1) -prof-use(pass 2) -fast -IPF-fp-relaxed
-opt-prefetch-next-iteration -no-opt-loadpair

459.GemsFDTD: -fast -IPF-fp-relaxed -opt-prefetch-next-iteration

465.tonto: -prof-gen(pass 1) -prof-use(pass 2) -fast -IPF-fp-relaxed
-opt-prefetch-next-iteration -inline-factor=150 -no-prefetch

Benchmarks using both Fortran and C:

435.gromacs: -prof-gen(pass 1) -prof-use(pass 2) -fast -IPF-fp-relaxed
-opt-prefetch-next-iteration -no-prefetch -fno-alias
-ansi-alias

436.cactusADM: -fast -IPF-fp-relaxed -opt-prefetch-next-iteration
-ansi-alias

454.calculix: -fast -IPF-fp-relaxed -opt-prefetch-next-iteration
-inline-factor=150 -no-opt-prefetch-initial-values
-ansi-alias

481.wrf: -fast -IPF-fp-relaxed -opt-prefetch-next-iteration
-no-opt-loadpair -ansi-alias

The flags file that was used to format this result can be browsed at
http://www.spec.org/cpu2006/flags/Fujitsu.PQ580A.ipf.linux.flags.html

You can also download the XML flags source by saving the following link:
http://www.spec.org/cpu2006/flags/Fujitsu.PQ580A.ipf.linux.flags.xml

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.0.1.
Report generated on Tue Jul 22 18:26:54 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 15 April 2008.