SPEC® CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Itautec

Servidor Itautec LX211 (Intel Xeon X5450)

SPECfp®_rate2006 = 70.7

SPECfp_rate_base2006 = 63.1

CPU2006 license: 9001
Test sponsor: Itautec
Tested by: Itautec

Test date: Apr-2008
Hardware Availability: Dec-2007
Software Availability: Jan-2008

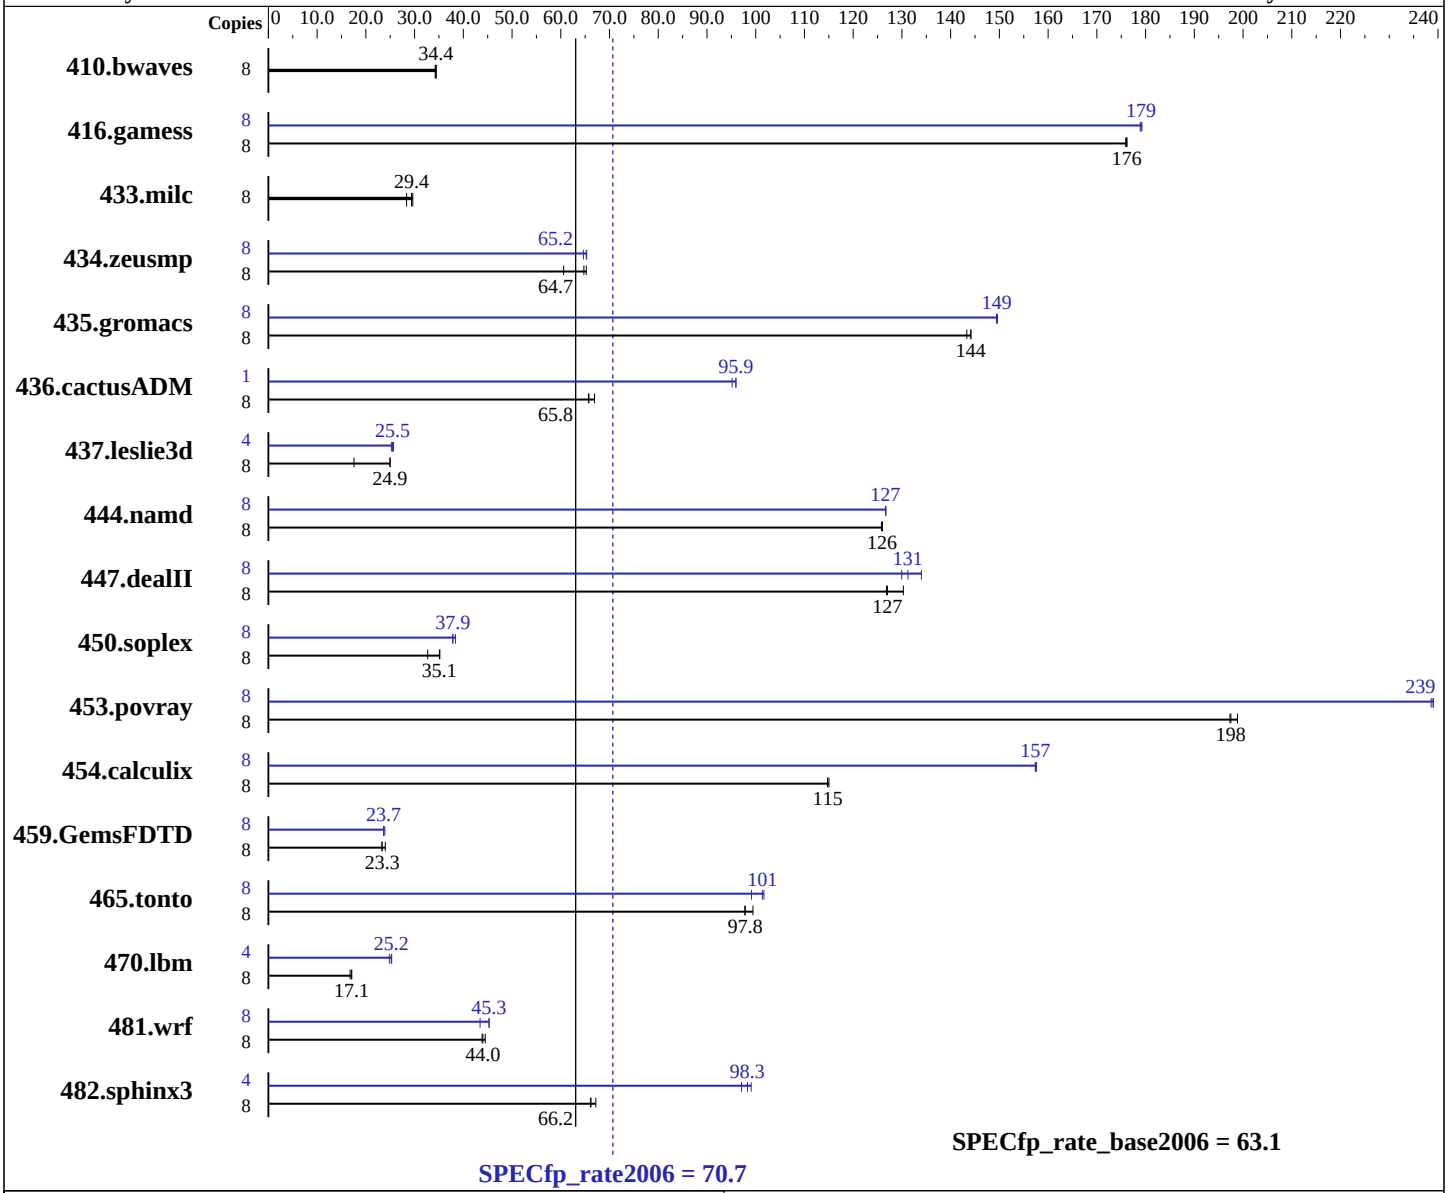

Hardware

CPU Name:	Intel Xeon X5450
CPU Characteristics:	
CPU MHz:	3000
FPU:	Integrated
CPU(s) enabled:	8 cores, 2 chips, 4 cores/chip
CPU(s) orderable:	1,2 chips
Primary Cache:	32 KB I + 32 KB D on chip per core
Secondary Cache:	12 MB I+D on chip per chip, 6 MB shared / 2 cores

Continued on next page

Software

Operating System:	SUSE Linux Enterprise Server 10 (x86_64) SP1, Kernel 2.6.16.46-0.12-smp
Compiler:	Intel C++ and Fortran Compiler for Linux version 10.1 Build 20080112 Package ID: l_cc_p_10.1.012, l_fc_p_10.1.012
Auto Parallel:	Yes
File System:	ReiserFS
System State:	Run Level 3 (multi-user)

Continued on next page

SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Itautec

Servidor Itautec LX211 (Intel Xeon X5450)

SPECfp_rate2006 = 70.7

SPECfp_rate_base2006 = 63.1

CPU2006 license: 9001
Test sponsor: Itautec
Tested by: Itautec

Test date: Apr-2008
Hardware Availability: Dec-2007
Software Availability: Jan-2008

L3 Cache: None
Other Cache: None
Memory: 12 GB (6 * 2 GB PC2-5300 FBDIMM, CL-5-5-5, ECC)
Disk Subsystem: 1 x SCSI, 73GB, 10000 RPM
Other Hardware: None

Base Pointers: 64-bit
Peak Pointers: 32/64-bit
Other Software: Binutils 2.17.10.50

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	8	3156	34.5	3176	34.2	**3164**	**34.4**	8	3156	34.5	3176	34.2	**3164**	**34.4**
416.gamess	8	**889**	**176**	890	176	889	176	8	876	179	**875**	**179**	874	179
433.milc	8	2589	28.4	**2500**	**29.4**	2479	29.6	8	2589	28.4	**2500**	**29.4**	2479	29.6
434.zeusmp	8	1202	60.6	**1124**	**64.7**	1116	65.2	8	**1116**	**65.2**	1115	65.3	1126	64.6
435.gromacs	8	399	143	**396**	**144**	396	144	8	**382**	**149**	382	149	382	150
436.cactusADM	8	**1453**	**65.8**	1429	66.9	1456	65.7	1	**125**	**95.9**	125	95.9	126	95.2
437.leslie3d	8	4278	17.6	3008	25.0	**3016**	**24.9**	4	**1476**	**25.5**	1464	25.7	1490	25.2
444.namd	8	510	126	**509**	**126**	509	126	8	507	127	**507**	**127**	506	127
447.dealII	8	722	127	**720**	**127**	702	130	8	704	130	**697**	**131**	683	134
450.soplex	8	2041	32.7	**1901**	**35.1**	1896	35.2	8	1764	37.8	**1762**	**37.9**	1738	38.4
453.povray	8	**215**	**198**	214	199	216	197	8	178	239	**178**	**239**	178	239
454.calculix	8	**575**	**115**	575	115	574	115	8	419	157	**419**	**157**	419	158
459.GemsFDTD	8	3538	24.0	3643	23.3	**3635**	**23.3**	8	3591	23.6	3554	23.9	**3589**	**23.7**
465.tonto	8	805	97.8	792	99.4	**805**	**97.8**	8	774	102	794	99.1	**777**	**101**
470.lbm	8	6557	16.8	6430	17.1	**6434**	**17.1**	4	2172	25.3	2215	24.8	**2180**	**25.2**
481.wrf	8	2008	44.5	**2030**	**44.0**	2038	43.8	8	2057	43.4	1973	45.3	**1974**	**45.3**
482.sphinx3	8	2320	67.2	**2355**	**66.2**	2359	66.1	4	803	97.1	**793**	**98.3**	787	99.1

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Compiler Invocation Notes

```
OMP_NUM_THREADS set to number of cores
KMP_STACK_SIZE set to 64M
KMP_AFFINITY set to physical,0
```

Operating System Notes

```
'ulimit -s unlimited' was used to set the stacksize to unlimited prior to run.
'/usr/bin/taskset' used to bind benchmark copies to processors, except for 436.cactusADM at peak.
```

Platform Notes

```
BIOS configuration:
Hardware Prefetch Disabled
```

Base Compiler Invocation

C benchmarks:
icc

C++ benchmarks:
icpc

Fortran benchmarks:
ifort

Benchmarks using both Fortran and C:
icc ifort

Base Portability Flags

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
450.soplex: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64

Base Optimization Flags

C benchmarks:
-fast

C++ benchmarks:
-fast

Continued on next page

Base Optimization Flags (Continued)

Fortran benchmarks:
`-fast`

Benchmarks using both Fortran and C:
`-fast`

Peak Compiler Invocation

C benchmarks (except as noted below):
`/opt/intel/cc/10.1.012/bin/icc -L/opt/intel/cc/10.1.012/lib -I/opt/intel/cc/10.1.012/include`

433.milc: `icc`

C++ benchmarks (except as noted below):
`icpc`

450.soplex: `/opt/intel/cc/10.1.012/bin/icpc -L/opt/intel/cc/10.1.012/lib -I/opt/intel/cc/10.1.012/include`

Fortran benchmarks (except as noted below):
`ifort`

437.leslie3d: `/opt/intel/fc/10.1.012/bin/ifort -L/opt/intel/fc/10.1.012/lib -I/opt/intel/fc/10.1.012/include`

Benchmarks using both Fortran and C:
`icc ifort`

Peak Portability Flags

410.bwaves: `-DSPEC_CPU_LP64`
416.gamess: `-DSPEC_CPU_LP64`
433.milc: `-DSPEC_CPU_LP64`
434.zeusmp: `-DSPEC_CPU_LP64`
435.gromacs: `-DSPEC_CPU_LP64 -nofor_main`
436.cactusADM: `-DSPEC_CPU_LP64 -nofor_main`
444.namd: `-DSPEC_CPU_LP64`
447.dealII: `-DSPEC_CPU_LP64`
453.povray: `-DSPEC_CPU_LP64`
454.calculix: `-DSPEC_CPU_LP64 -nofor_main`
459.GemsFDTD: `-DSPEC_CPU_LP64`
465.tonto: `-DSPEC_CPU_LP64`
481.wrf: `-DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX`

Peak Optimization Flags

C benchmarks:

433.milc: basepeak = yes

470.lbm: -prof-gen(pass 1) -prof-use(pass 2) -fast -unroll2 -scalar-rep- -prefetch -opt-malloc-options=3

482.sphinx3: -fast -unroll2

C++ benchmarks:

444.namd: -prof-gen(pass 1) -prof-use(pass 2) -fast -fno-alias -auto-ilp32

447.dealII: -prof-gen(pass 1) -prof-use(pass 2) -fast -unroll2 -ansi-alias -scalar-rep-

450.soplex: -prof-gen(pass 1) -prof-use(pass 2) -fast -opt-malloc-options=3

453.povray: -prof-gen(pass 1) -prof-use(pass 2) -fast -unroll4 -ansi-alias

Fortran benchmarks:

410.bwaves: basepeak = yes

416.gamess: -prof-gen(pass 1) -prof-use(pass 2) -fast -unroll2 -Ob0 -ansi-alias -scalar-rep-

434.zeusmp: -prof-gen(pass 1) -prof-use(pass 2) -fast

437.leslie3d: -prof-gen(pass 1) -prof-use(pass 2) -fast -prefetch -opt-malloc-options=3

459.GemsFDTD: -prof-gen(pass 1) -prof-use(pass 2) -fast -unroll2 -Ob0 -prefetch

465.tonto: -prof-gen(pass 1) -prof-use(pass 2) -fast -unroll4 -auto

Benchmarks using both Fortran and C:

435.gromacs: -prof-gen(pass 1) -prof-use(pass 2) -fast -prefetch -auto-ilp32

436.cactusADM: -prof-gen(pass 1) -prof-use(pass 2) -fast -unroll2 -prefetch -parallel -auto-ilp32

454.calculix: -fast -unroll-aggressive -auto-ilp32

Continued on next page

Peak Optimization Flags (Continued)

481.wrf: `-fast -auto-ilp32`

The flags file that was used to format this result can be browsed at
`http://www.spec.org/cpu2006/flags/Itautec-ic10.1-FP-intel64-linux-flags.20090713.00.html`

You can also download the XML flags source by saving the following link:
`http://www.spec.org/cpu2006/flags/Itautec-ic10.1-FP-intel64-linux-flags.20090713.00.xml`

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.0.1.
Report generated on Tue Jul 22 17:16:09 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 13 May 2008.