



# SPEC® CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

**Itautec**

**SPECfp®\_rate2006 = 69.1**

Servidor Itautec LX211 (Intel Xeon E5440)

**SPECfp\_rate\_base2006 = 62.4**

CPU2006 license: 9001


Test date: May-2008

Test sponsor: Itautec

Hardware Availability: Dec-2007

Tested by: Itautec

Software Availability: Jan-2008

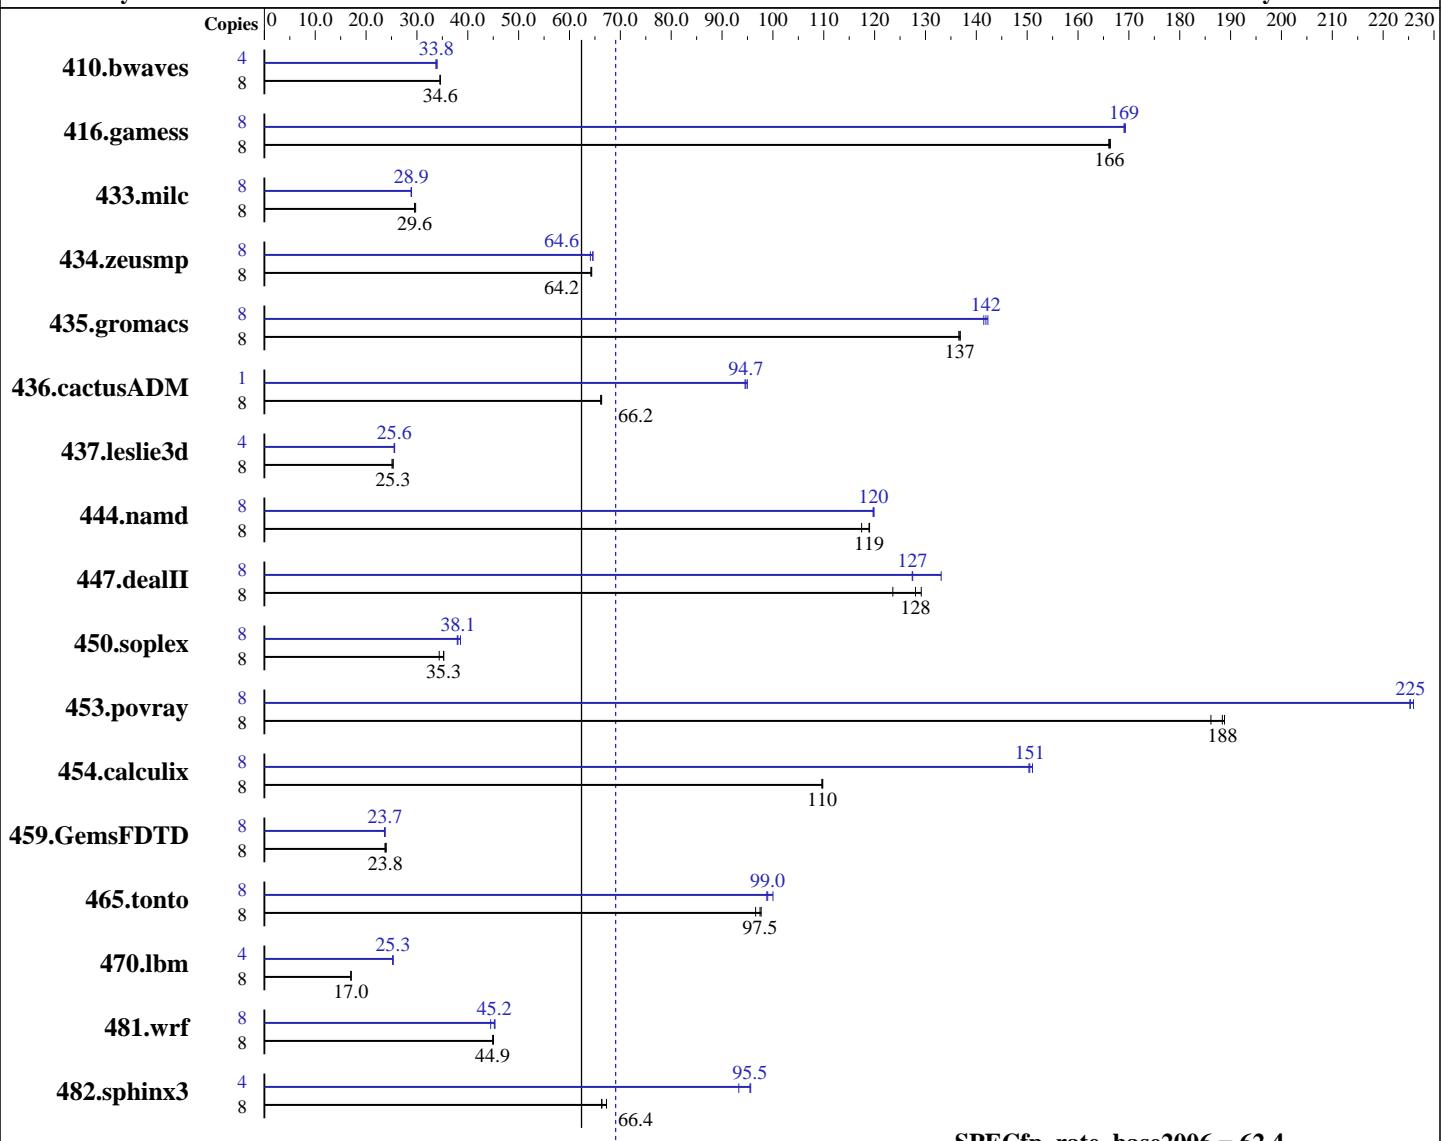

**SPECfp\_rate\_base2006 = 62.4**

**SPECfp\_rate2006 = 69.1**

## Hardware

CPU Name: Intel Xeon E5440  
CPU Characteristics:  
CPU MHz:  
FPU: Integrated  
CPU(s) enabled: 8 cores, 2 chips, 4 cores/chip  
CPU(s) orderable: 1,2 chips  
Primary Cache: 32 KB I + 32 KB D on chip per core  
Secondary Cache: 12 MB I+D on chip per chip, 6 MB shared / 2 cores

## Software

Operating System: SUSE Linux Enterprise Server 10 (x86\_64) SP1, Kernel 2.6.16.46-0.12-smp  
Compiler: Intel C++ and Fortran Compiler for Linux version 10.1 Build 20080112 Package ID: l\_cc\_p\_10.1.012 and l\_fc\_p\_10.1.012  
Auto Parallel: Yes  
File System: ReiserFS  
System State: Run Level 3 (multi-user)

Continued on next page

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

**Itautec**

**SPECfp\_rate2006 = 69.1**

**Servidor Itautec LX211 (Intel Xeon E5440)**

**SPECfp\_rate\_base2006 = 62.4**

**CPU2006 license:** 9001

**Test date:** May-2008

**Test sponsor:** Itautec

**Hardware Availability:** Dec-2007

**Tested by:** Itautec

**Software Availability:** Jan-2008

L3 Cache: None  
 Other Cache: None  
 Memory: 12 GB (6 \* 2 GB PC2-5300 FBDIMM, CL-5-5-5, ECC)  
 Disk Subsystem: 1 x SCSI, 73GB, 10000 RPM  
 Other Hardware: None

Base Pointers: 64-bit  
 Peak Pointers: 32/64-bit  
 Other Software: Binutils 2.17.10.50

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	8	3143	34.6	3147	34.5	<b>3144</b>	<b>34.6</b>	4	1611	33.7	1600	34.0	<b>1609</b>	<b>33.8</b>
416.gamess	8	942	166	<b>943</b>	<b>166</b>	943	166	8	925	169	926	169	<b>926</b>	<b>169</b>
433.milc	8	2469	29.7	2487	29.5	<b>2485</b>	<b>29.6</b>	8	<b>2540</b>	<b>28.9</b>	2537	28.9	2544	28.9
434.zeusmp	8	1131	64.4	<b>1133</b>	<b>64.2</b>	1133	64.2	8	<b>1127</b>	<b>64.6</b>	1127	64.6	1136	64.1
435.gromacs	8	418	137	<b>418</b>	<b>137</b>	417	137	8	401	142	<b>403</b>	<b>142</b>	404	141
436.cactusADM	8	1446	66.1	1441	66.3	<b>1444</b>	<b>66.2</b>	1	126	95.0	126	94.5	<b>126</b>	<b>94.7</b>
437.leslie3d	8	2997	25.1	2972	25.3	<b>2972</b>	<b>25.3</b>	4	1473	25.5	1468	25.6	<b>1471</b>	<b>25.6</b>
444.namd	8	<b>540</b>	<b>119</b>	546	117	539	119	8	535	120	<b>536</b>	<b>120</b>	536	120
447.dealII	8	<b>715</b>	<b>128</b>	741	124	709	129	8	<b>718</b>	<b>127</b>	688	133	718	127
450.soplex	8	1941	34.4	1892	35.3	<b>1893</b>	<b>35.3</b>	8	1759	37.9	<b>1753</b>	<b>38.1</b>	1730	38.6
453.povray	8	229	186	<b>226</b>	<b>188</b>	225	189	8	<b>189</b>	<b>225</b>	189	225	188	226
454.calculix	8	601	110	602	110	<b>602</b>	<b>110</b>	8	437	151	<b>439</b>	<b>151</b>	439	150
459.GemsFDTD	8	3541	24.0	3576	23.7	<b>3570</b>	<b>23.8</b>	8	<b>3577</b>	<b>23.7</b>	3576	23.7	3594	23.6
465.tonto	8	815	96.6	<b>808</b>	<b>97.5</b>	806	97.7	8	787	100	<b>795</b>	<b>99.0</b>	797	98.8
470.lbm	8	6441	17.1	<b>6451</b>	<b>17.0</b>	6468	17.0	4	2173	25.3	2178	25.2	<b>2173</b>	<b>25.3</b>
481.wrf	8	<b>1989</b>	<b>44.9</b>	1989	44.9	1983	45.1	8	2008	44.5	1970	45.4	<b>1976</b>	<b>45.2</b>
482.sphinx3	8	<b>2349</b>	<b>66.4</b>	2351	66.3	2317	67.3	4	<b>836</b>	<b>93.3</b>	815	95.6	<b>816</b>	<b>95.5</b>

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Compiler Invocation Notes

OMP\_NUM\_THREADS set to number of cores  
 KMP\_STACK\_SIZE set to 64M  
 KMP\_AFFINITY set to physical,0

## Operating System Notes

'ulimit -s unlimited' was used to set the stacksize to unlimited prior to run.  
 '/usr/bin/taskset' used to bind benchmark copies to processors, except for 436.cactusADM at peak.



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Itautec

**SPECfp\_rate2006 = 69.1**

Servidor Itautec LX211 (Intel Xeon E5440)

**SPECfp\_rate\_base2006 = 62.4**

CPU2006 license: 9001

Test date: May-2008

Test sponsor: Itautec

Hardware Availability: Dec-2007

Tested by: Itautec

Software Availability: Jan-2008

## Platform Notes

BIOS configuration:  
Hardware Prefetch Disabled

## Base Compiler Invocation

C benchmarks:  
icc

C++ benchmarks:  
icpc

Fortran benchmarks:  
ifort

Benchmarks using both Fortran and C:  
icc ifort

## Base Portability Flags

410.bwaves: -DSPEC\_CPU\_LP64  
416.gamess: -DSPEC\_CPU\_LP64  
433.milc: -DSPEC\_CPU\_LP64  
434.zeusmp: -DSPEC\_CPU\_LP64  
435.gromacs: -DSPEC\_CPU\_LP64 -nofor\_main  
436.cactusADM: -DSPEC\_CPU\_LP64 -nofor\_main  
437.leslie3d: -DSPEC\_CPU\_LP64  
444.namd: -DSPEC\_CPU\_LP64  
447.dealII: -DSPEC\_CPU\_LP64  
450.soplex: -DSPEC\_CPU\_LP64  
453.povray: -DSPEC\_CPU\_LP64  
454.calculix: -DSPEC\_CPU\_LP64 -nofor\_main  
459.GemsFDTD: -DSPEC\_CPU\_LP64  
465.tonto: -DSPEC\_CPU\_LP64  
470.lbm: -DSPEC\_CPU\_LP64  
481.wrf: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_CASE\_FLAG -DSPEC\_CPU\_LINUX  
482.sphinx3: -DSPEC\_CPU\_LP64

## Base Optimization Flags

C benchmarks:  
-fast

C++ benchmarks:  
-fast

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Itautec

**SPECfp\_rate2006 = 69.1**

Servidor Itautec LX211 (Intel Xeon E5440)

**SPECfp\_rate\_base2006 = 62.4**

CPU2006 license: 9001

Test date: May-2008

Test sponsor: Itautec

Hardware Availability: Dec-2007

Tested by: Itautec

Software Availability: Jan-2008

## Base Optimization Flags (Continued)

Fortran benchmarks:

-fast

Benchmarks using both Fortran and C:

-fast

## Peak Compiler Invocation

C benchmarks (except as noted below):

```
/opt/intel/cc/10.1.012/bin/icc -L/opt/intel/cc/10.1.012/lib  
-I/opt/intel/cc/10.1.012/include
```

433.milc: icc

C++ benchmarks (except as noted below):

icpc

```
450.soplex: /opt/intel/cc/10.1.012/bin/icpc -L/opt/intel/cc/10.1.012/lib  
-I/opt/intel/cc/10.1.012/include
```

Fortran benchmarks (except as noted below):

ifort

```
437.leslie3d: /opt/intel/fc/10.1.012/bin/ifort -L/opt/intel/fc/10.1.012/lib  
-I/opt/intel/fc/10.1.012/include
```

Benchmarks using both Fortran and C:

icc ifort

## Peak Portability Flags

```
410.bwaves: -DSPEC_CPU_LP64  
416.gamess: -DSPEC_CPU_LP64  
    433.milc: -DSPEC_CPU_LP64  
434.zeusmp: -DSPEC_CPU_LP64  
435.gromacs: -DSPEC_CPU_LP64 -nofor_main  
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main  
    444.namd: -DSPEC_CPU_LP64  
    447.dealII: -DSPEC_CPU_LP64  
    453.povray: -DSPEC_CPU_LP64  
454.calculix: -DSPEC_CPU_LP64 -nofor_main  
459.GemsFDTD: -DSPEC_CPU_LP64  
    465.tonto: -DSPEC_CPU_LP64  
    481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
```



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Itaute

SPECfp\_rate2006 = 69.1

Servidor Itaute LX211 (Intel Xeon E5440)

SPECfp\_rate\_base2006 = 62.4

CPU2006 license: 9001

Test date: May-2008

Test sponsor: Itaute

Hardware Availability: Dec-2007

Tested by: Itaute

Software Availability: Jan-2008

## Peak Optimization Flags

C benchmarks:

433.milc: -prof-gen(pass 1) -prof-use(pass 2) -fast -fno-alias  
-auto-ilp32

470.lbm: -prof-gen(pass 1) -prof-use(pass 2) -fast -unroll2  
-scalar-rep- -prefetch -opt-malloc-options=3

482.sphinx3: -fast -unroll2

C++ benchmarks:

444.namd: -prof-gen(pass 1) -prof-use(pass 2) -fast -fno-alias  
-auto-ilp32

447.dealII: -prof-gen(pass 1) -prof-use(pass 2) -fast -unroll2  
-ansi-alias -scalar-rep-

450.soplex: -prof-gen(pass 1) -prof-use(pass 2) -fast  
-opt-malloc-options=3

453.povray: -prof-gen(pass 1) -prof-use(pass 2) -fast -unroll4  
-ansi-alias

Fortran benchmarks:

410.bwaves: -fast -prefetch

416.gamess: -prof-gen(pass 1) -prof-use(pass 2) -fast -unroll2 -O0  
-ansi-alias -scalar-rep-

434.zeusmp: -prof-gen(pass 1) -prof-use(pass 2) -fast

437.leslie3d: -prof-gen(pass 1) -prof-use(pass 2) -fast -prefetch  
-opt-malloc-options=3

459.GemsFDTD: -prof-gen(pass 1) -prof-use(pass 2) -fast -unroll2 -O0  
-prefetch

465.tonto: -prof-gen(pass 1) -prof-use(pass 2) -fast -unroll4 -auto

Benchmarks using both Fortran and C:

435.gromacs: -prof-gen(pass 1) -prof-use(pass 2) -fast -prefetch  
-auto-ilp32

436.cactusADM: -prof-gen(pass 1) -prof-use(pass 2) -fast -unroll2  
-prefetch -parallel -auto-ilp32

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Itautech

SPECfp\_rate2006 = 69.1

Servidor Itautech LX211 (Intel Xeon E5440)

SPECfp\_rate\_base2006 = 62.4

CPU2006 license: 9001

Test date: May-2008

Test sponsor: Itautech

Hardware Availability: Dec-2007

Tested by: Itautech

Software Availability: Jan-2008

## Peak Optimization Flags (Continued)

454.calculix: -fast -unroll-aggressive -auto-ilp32

481.wrf: -fast -auto-ilp32

The flags file that was used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Itautech-ic10.1-FP-intel64-linux-flags.20090714.html>

You can also download the XML flags source by saving the following link:

<http://www.spec.org/cpu2006/flags/Itautech-ic10.1-FP-intel64-linux-flags.20090714.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.0.1.

Report generated on Tue Jul 22 16:58:16 2014 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 27 May 2008.