SPEC® CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

NEC Corporation

Express5800/120Bb-m6
(Intel Xeon L5420)

SPECfp®_rate2006 = 66.9

SPECfp_rate_base2006 = 61.5

CPU2006 license: 9006
Test sponsor: NEC Corporation
Tested by: NEC Corporation

Test date: Apr-2008
Hardware Availability: Apr-2008
Software Availability: Nov-2007

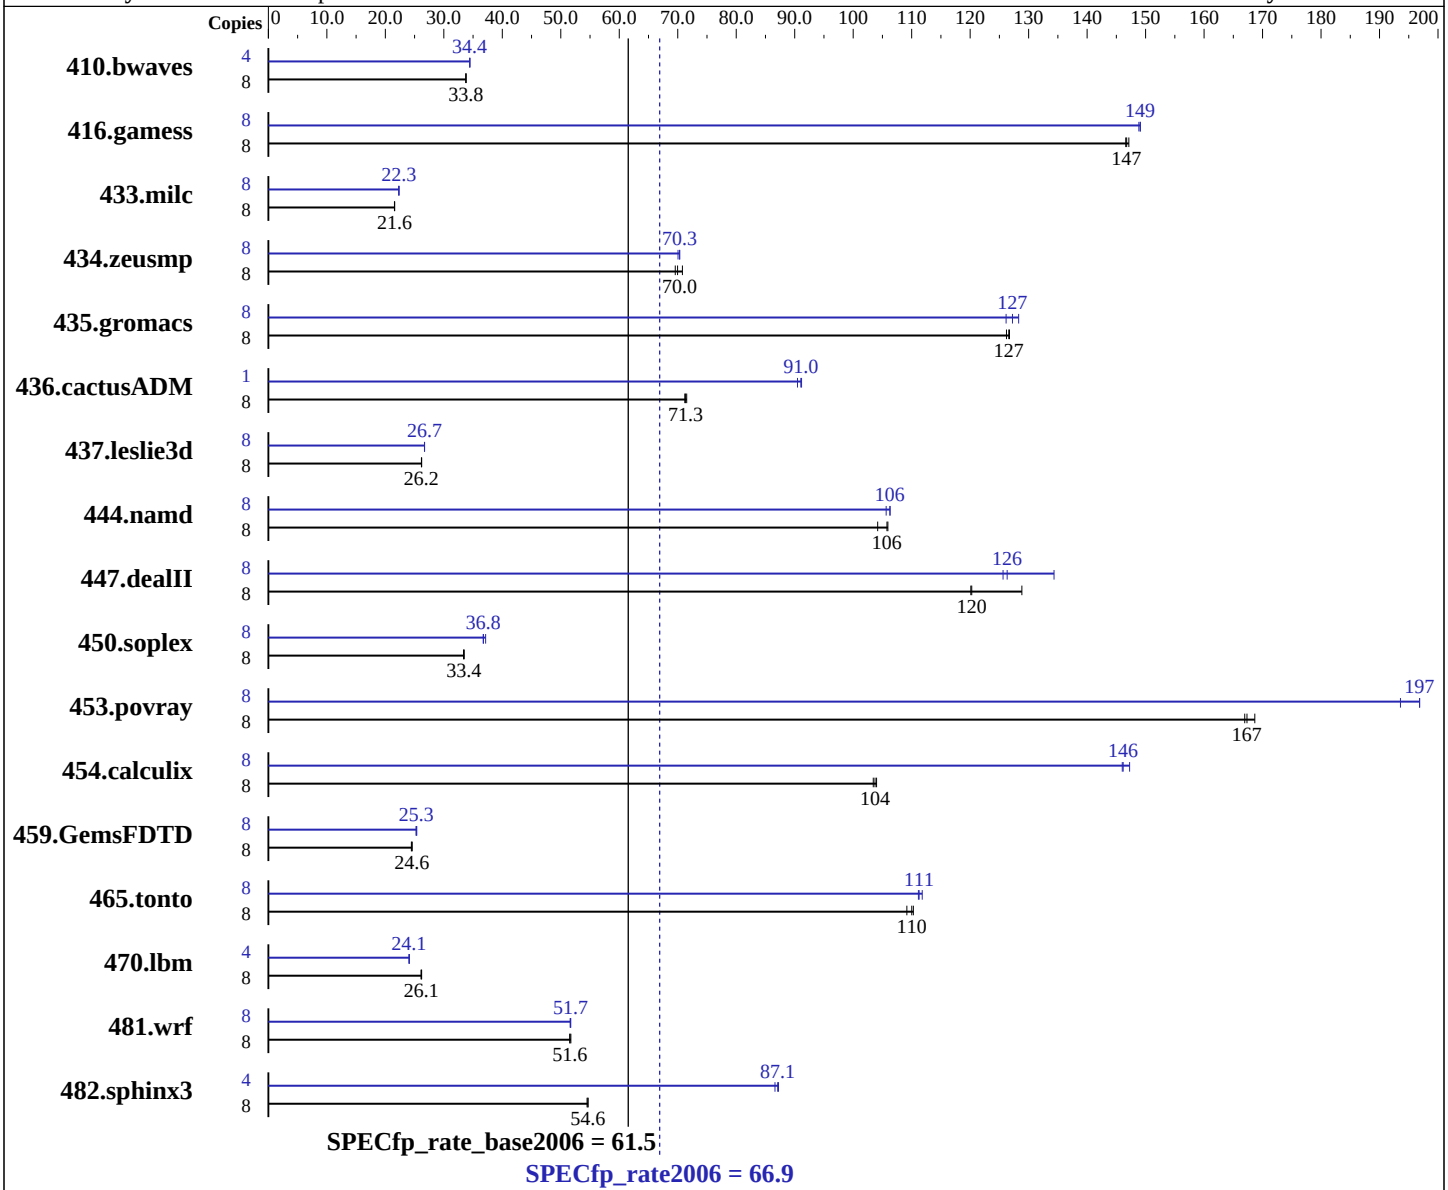

Hardware

CPU Name:	Intel Xeon L5420
CPU Characteristics:	2.50 GHz, 2x6 MB L2 shared, 1333 MHz bus
CPU MHz:	2500
FPU:	Integrated
CPU(s) enabled:	8 cores, 2 chips, 4 cores/chip
CPU(s) orderable:	1,2 chips
Primary Cache:	32 KB I + 32 KB D on chip per core
Secondary Cache:	12 MB I+D on chip per chip, 6 MB shared / 2 cores

Continued on next page

Software

Operating System:	SUSE Linux Enterprise Server 10 (x86_64) SP1, Kernel 2.6.16.46-0.12-smp
Compiler:	Intel C++ and Fortran Compiler for Linux32 and Linux64 version 10.1 Build 20070913 Package ID: l_cc_p_10.1.008, l_fc_p_10.1.008
Auto Parallel:	Yes
File System:	ext2

Continued on next page

SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

NEC Corporation

Express5800/120Bb-m6
(Intel Xeon L5420)

SPECfp_rate2006 = 66.9

SPECfp_rate_base2006 = 61.5

CPU2006 license: 9006
Test sponsor: NEC Corporation
Tested by: NEC Corporation

Test date: Apr-2008
Hardware Availability: Apr-2008
Software Availability: Nov-2007

L3 Cache: None
Other Cache: None
Memory: 12 GB (12x1 GB PC2-5300F, 2 rank, CL5-5-5, ECC)
Disk Subsystem: 1x73.2 GB SAS, 10000RPM
Other Hardware: None

System State: Run level 3 (multi-user)
Base Pointers: 64-bit
Peak Pointers: 32/64-bit
Other Software: binutils-2.17.tar.gz, Version 2.17

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	8	**3218**	**33.8**	3219	33.8	3217	33.8	4	1578	34.4	**1578**	**34.4**	1579	34.4
416.gamess	8	**1067**	**147**	1068	147	1065	147	8	1050	149	1052	149	**1051**	**149**
433.milc	8	**3402**	**21.6**	3402	21.6	3407	21.6	8	3293	22.3	**3291**	**22.3**	3289	22.3
434.zeusmp	8	1046	69.6	**1040**	**70.0**	1028	70.8	8	1035	70.3	1039	70.0	**1035**	**70.3**
435.gromacs	8	453	126	**451**	**127**	451	127	8	**449**	**127**	445	128	453	126
436.cactusADM	8	1336	71.5	1343	71.2	**1340**	**71.3**	1	**131**	**91.0**	131	91.2	132	90.5
437.leslie3d	8	**2872**	**26.2**	2869	26.2	2873	26.2	8	**2817**	**26.7**	2817	26.7	2815	26.7
444.namd	8	606	106	616	104	**607**	**106**	8	607	106	**604**	**106**	603	106
447.dealII	8	**761**	**120**	710	129	762	120	8	681	134	729	126	**724**	**126**
450.soplex	8	1999	33.4	**1996**	**33.4**	1993	33.5	8	**1814**	**36.8**	1816	36.7	1796	37.2
453.povray	8	**254**	**167**	255	167	252	169	8	216	197	**216**	**197**	220	194
454.calculix	8	635	104	**636**	**104**	638	103	8	448	147	452	146	**452**	**146**
459.GemsFDTD	8	**3457**	**24.6**	3454	24.6	3471	24.5	8	3359	25.3	**3356**	**25.3**	3345	25.4
465.tonto	8	714	110	721	109	**716**	**110**	8	**707**	**111**	704	112	708	111
470.lbm	8	4194	26.2	**4206**	**26.1**	4207	26.1	4	2284	24.1	**2283**	**24.1**	2281	24.1
481.wrf	8	1734	51.5	1728	51.7	**1733**	**51.6**	8	1728	51.7	**1729**	**51.7**	1732	51.6
482.sphinx3	8	**2853**	**54.6**	2853	54.7	2861	54.5	4	900	86.6	**895**	**87.1**	894	87.2

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Compiler Invocation Notes

```
OMP_NUM_THREADS set to number of cores
```

Operating System Notes

```
'ulimit -s unlimited' was used to set the stacksize to unlimited prior to run
'/usr/bin/taskset' used to bind processes to CPUs
```

General Notes

```
All benchmarks compiled in 64-bit mode except 437.leslie3d,
450.soplex, 470.lbm and 482.sphinx3, for peak, are
compiled in 32-bit mode
```

Base Compiler Invocation

C benchmarks:
icc

C++ benchmarks:
icpc

Fortran benchmarks:
ifort

Benchmarks using both Fortran and C:
icc ifort

Base Portability Flags

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
450.soplex: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64

Base Optimization Flags

C benchmarks:
-fast

C++ benchmarks:
-fast

Fortran benchmarks:
-fast

Benchmarks using both Fortran and C:
-fast

Peak Compiler Invocation

C benchmarks (except as noted below):
`/opt/intel/cc/10.1.008/bin/icc -L/opt/intel/cc/10.1.008/lib -I/opt/intel/cc/10.1.008/include`

433.milc: `icc`

C++ benchmarks (except as noted below):
`icpc`

450.soplex: `/opt/intel/cc/10.1.008/bin/icpc -L/opt/intel/cc/10.1.008/lib -I/opt/intel/cc/10.1.008/include`

Fortran benchmarks (except as noted below):
`ifort`

437.leslie3d: `/opt/intel/fc/10.1.008/bin/ifort -L/opt/intel/fc/10.1.008/lib -I/opt/intel/fc/10.1.008/include`

Benchmarks using both Fortran and C:
`icc ifort`

Peak Portability Flags

410.bwaves: `-DSPEC_CPU_LP64`
416.gamess: `-DSPEC_CPU_LP64`
433.milc: `-DSPEC_CPU_LP64`
434.zeusmp: `-DSPEC_CPU_LP64`
435.gromacs: `-DSPEC_CPU_LP64 -nofor_main`
436.cactusADM: `-DSPEC_CPU_LP64 -nofor_main`
444.namd: `-DSPEC_CPU_LP64`
447.dealII: `-DSPEC_CPU_LP64`
453.povray: `-DSPEC_CPU_LP64`
454.calculix: `-DSPEC_CPU_LP64 -nofor_main`
459.GemsFDTD: `-DSPEC_CPU_LP64`
465.tonto: `-DSPEC_CPU_LP64`
481.wrf: `-DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX`

Peak Optimization Flags

C benchmarks:

433.milc: `-prof-gen`(pass 1) `-prof-use`(pass 2) `-fast -fno-alias -auto-ilp32`

470.lbm: `-prof-gen`(pass 1) `-prof-use`(pass 2) `-fast -unroll2 -scalar-rep- -prefetch -opt-malloc-options=3`

Continued on next page

Peak Optimization Flags (Continued)

482.sphinx3: -fast -unroll2

C++ benchmarks:

444.namd: -prof-gen(pass 1) -prof-use(pass 2) -fast -fno-alias -auto-ilp32

447.dealII: -prof-gen(pass 1) -prof-use(pass 2) -fast -unroll2 -ansi-alias -scalar-rep-

450.soplex: -prof-gen(pass 1) -prof-use(pass 2) -fast -opt-malloc-options=3

453.povray: -prof-gen(pass 1) -prof-use(pass 2) -fast -unroll4 -ansi-alias

Fortran benchmarks:

410.bwaves: -fast -prefetch

416.gamess: -prof-gen(pass 1) -prof-use(pass 2) -fast -unroll2 -Ob0 -ansi-alias -scalar-rep-

434.zeusmp: -prof-gen(pass 1) -prof-use(pass 2) -fast

437.leslie3d: -prof-gen(pass 1) -prof-use(pass 2) -fast -prefetch -opt-malloc-options=3

459.GemsFDTD: -prof-gen(pass 1) -prof-use(pass 2) -fast -unroll2 -Ob0 -prefetch

465.tonto: -prof-gen(pass 1) -prof-use(pass 2) -fast -unroll4 -auto

Benchmarks using both Fortran and C:

435.gromacs: -prof-gen(pass 1) -prof-use(pass 2) -fast -prefetch -auto-ilp32

436.cactusADM: -prof-gen(pass 1) -prof-use(pass 2) -fast -unroll2 -prefetch -parallel -auto-ilp32

454.calculix: -fast -unroll-aggressive -auto-ilp32

481.wrf: -fast -auto-ilp32

The flags file that was used to format this result can be browsed at
http://www.spec.org/cpu2006/flags/NEC-Intel-ic10.1-FP-intel64-linux-flags.20090714.html

You can also download the XML flags source by saving the following link:
`http://www.spec.org/cpu2006/flags/NEC-Intel-ic10.1-FP-intel64-linux-flags.20090714.xml`

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.0.
Report generated on Tue Jul 22 17:03:48 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 27 May 2008.