SPEC® CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Itautec

Servidor Itautec LX211 (Intel Xeon X5450)

SPECfp®_rate2006 = 39.3

SPECfp_rate_base2006 = 36.5

CPU2006 license: 9001
Test sponsor: Itautec
Tested by: Itautec

Test date: May-2008
Hardware Availability: Dec-2007
Software Availability: Jan-2008

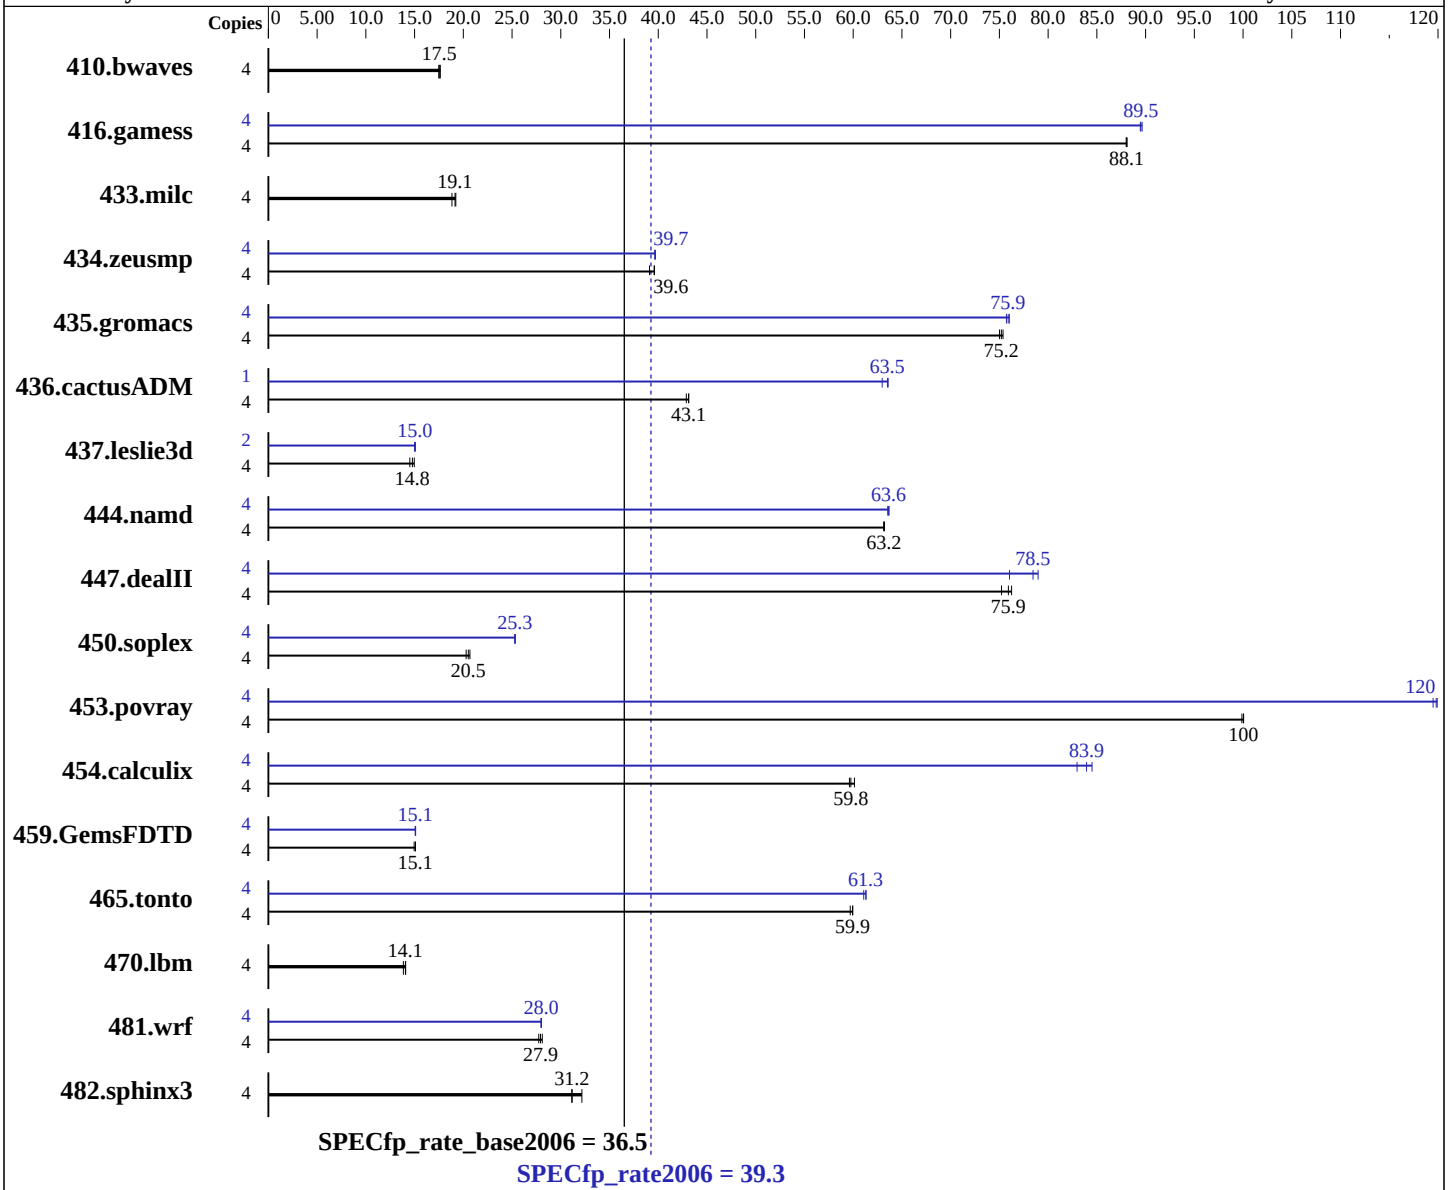

Hardware

CPU Name:	Intel Xeon X5450
CPU Characteristics:	
CPU MHz:	3000
FPU:	Integrated
CPU(s) enabled:	4 cores, 1 chip, 4 cores/chip
CPU(s) orderable:	1,2 chips
Primary Cache:	32 KB I + 32 KB D on chip per core
Secondary Cache:	12 MB I+D on chip per chip, 6 MB shared / 2 cores

Continued on next page

Software

Operating System:	SUSE Linux Enterprise Server 10 (x86_64) SP1, Kernel 2.6.16.46-0.12-smp
Compiler:	Intel C++ and Fortran Compiler for Linux version 10.1 Build 20080112 Package ID: l_cc_p_10.1.012, l_fc_p_10.1.012
Auto Parallel:	Yes
File System:	ReiserFS
System State:	Run Level 3 (multi-user)

Continued on next page

SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Itautec

Servidor Itautec LX211 (Intel Xeon X5450)

SPECfp_rate2006 = 39.3

SPECfp_rate_base2006 = 36.5

CPU2006 license: 9001
Test sponsor: Itautec
Tested by: Itautec

Test date: May-2008
Hardware Availability: Dec-2007
Software Availability: Jan-2008

L3 Cache: None
Other Cache: None
Memory: 12 GB (6 * 2 GB PC2-5300 FBDIMM, CL-5-5-5, ECC)
Disk Subsystem: 1 x SCSI, 73GB, 10000 RPM
Other Hardware: None

Base Pointers: 64-bit
Peak Pointers: 32/64-bit
Other Software: Binutils 2.17.10.50

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	4	3109	17.5	**3100**	**17.5**	3081	17.6	4	3109	17.5	**3100**	**17.5**	3081	17.6
416.gamess	4	**889**	**88.1**	890	88.0	889	88.1	4	**875**	**89.5**	876	89.5	874	89.6
433.milc	4	1950	18.8	1909	19.2	**1918**	**19.1**	4	1950	18.8	1909	19.2	**1918**	**19.1**
434.zeusmp	4	931	39.1	**920**	**39.6**	919	39.6	4	918	39.6	917	39.7	**917**	**39.7**
435.gromacs	4	381	75.0	379	75.4	**380**	**75.2**	4	377	75.7	376	76.0	**376**	**75.9**
436.cactusADM	4	1115	42.9	1108	43.1	**1109**	**43.1**	1	190	63.0	188	63.6	**188**	**63.5**
437.leslie3d	4	2591	14.5	2512	15.0	**2544**	**14.8**	2	1247	15.1	**1250**	**15.0**	1253	15.0
444.namd	4	508	63.2	508	63.1	**508**	**63.2**	4	505	63.5	504	63.7	**504**	**63.6**
447.dealII	4	608	75.2	**603**	**75.9**	600	76.3	4	579	79.0	**583**	**78.5**	602	76.0
450.soplex	4	1644	20.3	**1627**	**20.5**	1613	20.7	4	1316	25.3	**1319**	**25.3**	1320	25.3
453.povray	4	213	99.9	213	100	**213**	**100**	4	177	120	**178**	**120**	178	119
454.calculix	4	549	60.1	**552**	**59.8**	554	59.6	4	398	83.0	391	84.5	**393**	**83.9**
459.GemsFDTD	4	2838	15.0	2812	15.1	**2812**	**15.1**	4	2816	15.1	**2814**	**15.1**	2809	15.1
465.tonto	4	**657**	**59.9**	659	59.7	657	59.9	4	642	61.3	**642**	**61.3**	644	61.1
470.lbm	4	3969	13.8	**3910**	**14.1**	3902	14.1	4	3969	13.8	**3910**	**14.1**	3902	14.1
481.wrf	4	1611	27.7	**1600**	**27.9**	1590	28.1	4	1595	28.0	1598	28.0	**1596**	**28.0**
482.sphinx3	4	2505	31.1	2424	32.2	**2502**	**31.2**	4	2505	31.1	2424	32.2	**2502**	**31.2**

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Compiler Invocation Notes

```
OMP_NUM_THREADS set to number of cores
KMP_STACK_SIZE set to 64M
KMP_AFFINITY set to physical,0
```

Operating System Notes

```
'ulimit -s unlimited' was used to set the stacksize to unlimited prior to run.
'/usr/bin/taskset' used to bind benchmark copies to processors, except for 436.cactusADM at peak.
```

Platform Notes

```
BIOS configuration:
Hardware Prefetch Disabled
```

Base Compiler Invocation

C benchmarks:
icc

C++ benchmarks:
icpc

Fortran benchmarks:
ifort

Benchmarks using both Fortran and C:
icc ifort

Base Portability Flags

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
450.soplex: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64

Base Optimization Flags

C benchmarks:
-fast

C++ benchmarks:
-fast

Continued on next page

Base Optimization Flags (Continued)

Fortran benchmarks:
`-fast`

Benchmarks using both Fortran and C:
`-fast`

Peak Compiler Invocation

C benchmarks:
`icc`

C++ benchmarks (except as noted below):
`icpc`

450.soplex: `/opt/intel/cc/10.1.012/bin/icpc -L/opt/intel/cc/10.1.012/lib -I/opt/intel/cc/10.1.012/include`

Fortran benchmarks (except as noted below):
`ifort`

437.leslie3d: `/opt/intel/fc/10.1.012/bin/ifort -L/opt/intel/fc/10.1.012/lib -I/opt/intel/fc/10.1.012/include`

Benchmarks using both Fortran and C:
`icc ifort`

Peak Portability Flags

410.bwaves: `-DSPEC_CPU_LP64`
416.gamess: `-DSPEC_CPU_LP64`
433.milc: `-DSPEC_CPU_LP64`
434.zeusmp: `-DSPEC_CPU_LP64`
435.gromacs: `-DSPEC_CPU_LP64 -nofor_main`
436.cactusADM: `-DSPEC_CPU_LP64 -nofor_main`
444.namd: `-DSPEC_CPU_LP64`
447.dealII: `-DSPEC_CPU_LP64`
453.povray: `-DSPEC_CPU_LP64`
454.calculix: `-DSPEC_CPU_LP64 -nofor_main`
459.GemsFDTD: `-DSPEC_CPU_LP64`
465.tonto: `-DSPEC_CPU_LP64`
470.lbm: `-DSPEC_CPU_LP64`
481.wrf: `-DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX`
482.sphinx3: `-DSPEC_CPU_LP64`

Peak Optimization Flags

C benchmarks:

433.milc: basepeak = yes

470.lbm: basepeak = yes

482.sphinx3: basepeak = yes

C++ benchmarks:

444.namd: -prof-gen(pass 1) -prof-use(pass 2) -fast -fno-alias -auto-ilp32

447.dealII: -prof-gen(pass 1) -prof-use(pass 2) -fast -unroll2 -ansi-alias -scalar-rep-

450.soplex: -prof-gen(pass 1) -prof-use(pass 2) -fast -opt-malloc-options=3

453.povray: -prof-gen(pass 1) -prof-use(pass 2) -fast -unroll4 -ansi-alias

Fortran benchmarks:

410.bwaves: basepeak = yes

416.gamess: -prof-gen(pass 1) -prof-use(pass 2) -fast -unroll2 -Ob0 -ansi-alias -scalar-rep-

434.zeusmp: -prof-gen(pass 1) -prof-use(pass 2) -fast

437.leslie3d: -prof-gen(pass 1) -prof-use(pass 2) -fast -prefetch -opt-malloc-options=3

459.GemsFDTD: -prof-gen(pass 1) -prof-use(pass 2) -fast -unroll2 -Ob0 -prefetch

465.tonto: -prof-gen(pass 1) -prof-use(pass 2) -fast -unroll4 -auto

Benchmarks using both Fortran and C:

435.gromacs: -prof-gen(pass 1) -prof-use(pass 2) -fast -prefetch -auto-ilp32

436.cactusADM: -prof-gen(pass 1) -prof-use(pass 2) -fast -unroll2 -prefetch -parallel -auto-ilp32

454.calculix: -fast -unroll-aggressive -auto-ilp32

Continued on next page

Peak Optimization Flags (Continued)

481.wrf: `-fast -auto-ilp32`

The flags file that was used to format this result can be browsed at
`http://www.spec.org/cpu2006/flags/Itautec-ic10.1-FP-intel64-linux-flags.20090714.html`

You can also download the XML flags source by saving the following link:
`http://www.spec.org/cpu2006/flags/Itautec-ic10.1-FP-intel64-linux-flags.20090714.xml`

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.0.1.
Report generated on Tue Jul 22 16:56:57 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 27 May 2008.