SPEC® CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

NEC Corporation

Express5800/110Ri-1
(Intel Xeon 3065)

SPECfp®2006 = 18.4

SPECfp_base2006 = 17.3

CPU2006 license: 9006
Test sponsor: NEC Corporation
Tested by: NEC Corporation

Test date: Jun-2008
Hardware Availability: Apr-2008
Software Availability: Nov-2007

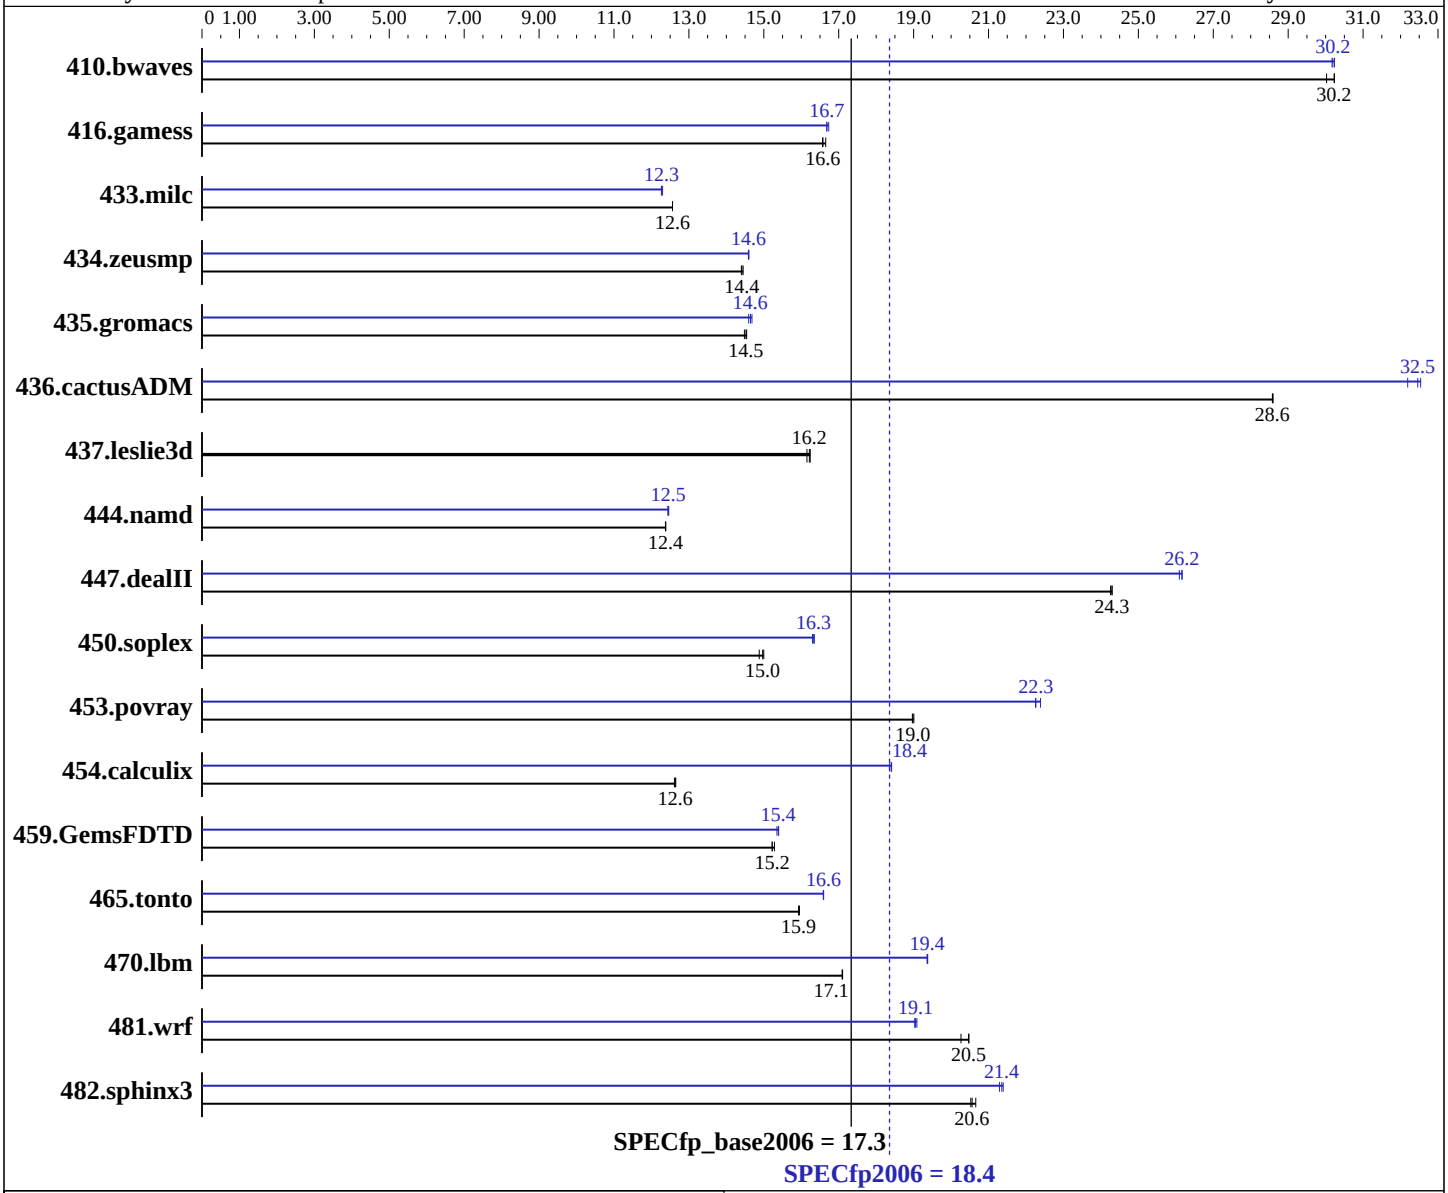

Hardware

CPU Name:	Intel Xeon 3065
CPU Characteristics:	2.33 GHz, 4 MB L2, 1333 MHz bus
CPU MHz:	2333
FPU:	Integrated
CPU(s) enabled:	2 cores, 1 chip, 2 cores/chip
CPU(s) orderable:	1 chip
Primary Cache:	32 KB I + 32 KB D on chip per core
Secondary Cache:	4 MB I+D on chip per chip

Continued on next page

Software

Operating System:	SUSE Linux Enterprise Server 10 (x86_64) SP1, Kernel 2.6.16.46-0.12-smp
Compiler:	Intel C++ and Fortran Compiler for Linux version 10.1 Build 20070913 Package ID: l_cc_p_10.1.008, l_fc_p_10.1.008
Auto Parallel:	Yes
File System:	ReiserFS
System State:	Run level 3 (multi-user)

Continued on next page

SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

NEC Corporation

Express5800/110Ri-1
(Intel Xeon 3065)

SPECfp2006 = 18.4

SPECfp_base2006 = 17.3

CPU2006 license: 9006
Test sponsor: NEC Corporation
Tested by: NEC Corporation

Test date: Jun-2008
Hardware Availability: Apr-2008
Software Availability: Nov-2007

L3 Cache: None
Other Cache: None
Memory: 8 GB (4x2 GB PC2-6400E, 2 rank, CL6-6-6, ECC)
Disk Subsystem: 1x80.0 GB SATAII, 7200RPM
Other Hardware: None

Base Pointers: 64-bit
Peak Pointers: 32/64-bit
Other Software: binutils 2.17

Results Table

Benchmark	Base						Peak					
	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	453	30.0	**450**	**30.2**	449	30.2	449	30.2	**450**	**30.2**	450	30.2
416.gamess	1176	16.7	1182	16.6	**1181**	**16.6**	**1173**	**16.7**	1174	16.7	1170	16.7
433.milc	731	12.6	**731**	**12.6**	731	12.6	**748**	**12.3**	747	12.3	748	12.3
434.zeusmp	**631**	**14.4**	632	14.4	630	14.4	624	14.6	**623**	**14.6**	623	14.6
435.gromacs	493	14.5	491	14.5	**492**	**14.5**	486	14.7	**488**	**14.6**	489	14.6
436.cactusADM	418	28.6	418	28.6	**418**	**28.6**	**368**	**32.5**	371	32.2	367	32.5
437.leslie3d	582	16.2	579	16.2	**580**	**16.2**	582	16.2	579	16.2	**580**	**16.2**
444.namd	**648**	**12.4**	648	12.4	648	12.4	645	12.4	644	12.5	**644**	**12.5**
447.dealII	471	24.3	**471**	**24.3**	472	24.3	437	26.2	**437**	**26.2**	438	26.1
450.soplex	561	14.9	556	15.0	**557**	**15.0**	510	16.3	**511**	**16.3**	512	16.3
453.povray	280	19.0	281	19.0	**280**	**19.0**	238	22.4	**239**	**22.3**	239	22.3
454.calculix	652	12.6	**653**	**12.6**	654	12.6	448	18.4	449	18.4	**448**	**18.4**
459.GemsFDTD	694	15.3	**697**	**15.2**	697	15.2	689	15.4	**689**	**15.4**	691	15.4
465.tonto	**618**	**15.9**	618	15.9	617	16.0	593	16.6	593	16.6	**593**	**16.6**
470.lbm	803	17.1	804	17.1	**804**	**17.1**	710	19.4	709	19.4	**709**	**19.4**
481.wrf	551	20.3	**546**	**20.5**	545	20.5	587	19.0	**586**	**19.1**	585	19.1
482.sphinx3	950	20.5	**948**	**20.6**	943	20.7	911	21.4	**913**	**21.4**	915	21.3

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Operating System Notes

```
'ulimit -s unlimited' was used to set the stacksize to unlimited prior to run
 OMP_NUM_THREADS set to number of cores
```

Platform Notes

```
Bios settings:
Hardware Prefetcher:          Enabled
Adjacent Cache Line Prefetch: Enabled
Intel SpeedStep Technology:   Disabled
```

General Notes

```
All benchmarks compiled in 64-bit mode except 450.soplex,
470.lbm and 482.sphinx3, for peak, are compiled in 32-bit mode
```

Base Compiler Invocation

C benchmarks:
icc

C++ benchmarks:
icpc

Fortran benchmarks:
ifort

Benchmarks using both Fortran and C:
icc ifort

Base Portability Flags

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
450.soplex: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64

Base Optimization Flags

C benchmarks:
-fast -parallel

C++ benchmarks:
-fast -parallel

Continued on next page

Base Optimization Flags (Continued)

Fortran benchmarks:
`-fast -parallel`

Benchmarks using both Fortran and C:
`-fast -parallel`

Peak Compiler Invocation

C benchmarks (except as noted below):
`/opt/intel/cc/10.1.008/bin/icc -L/opt/intel/cc/10.1.008/lib -I/opt/intel/cc/10.1.008/include`

433.milc: `icc`

C++ benchmarks (except as noted below):
`icpc`

450.soplex: `/opt/intel/cc/10.1.008/bin/icpc -L/opt/intel/cc/10.1.008/lib -I/opt/intel/cc/10.1.008/include`

Fortran benchmarks:
`ifort`

Benchmarks using both Fortran and C:
`icc ifort`

Peak Portability Flags

410.bwaves: `-DSPEC_CPU_LP64`
416.gamess: `-DSPEC_CPU_LP64`
433.milc: `-DSPEC_CPU_LP64`
434.zeusmp: `-DSPEC_CPU_LP64`
435.gromacs: `-DSPEC_CPU_LP64 -nofor_main`
436.cactusADM: `-DSPEC_CPU_LP64 -nofor_main`
437.leslie3d: `-DSPEC_CPU_LP64`
444.namd: `-DSPEC_CPU_LP64`
447.dealII: `-DSPEC_CPU_LP64`
453.povray: `-DSPEC_CPU_LP64`
454.calculix: `-DSPEC_CPU_LP64 -nofor_main`
459.GemsFDTD: `-DSPEC_CPU_LP64`
465.tonto: `-DSPEC_CPU_LP64`
481.wrf: `-DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX`

Peak Optimization Flags

C benchmarks:

433.milc: `-prof-gen`(pass 1) `-prof-use`(pass 2) `-fast -fno-alias -auto-ilp32`

470.lbm: `-prof-gen`(pass 1) `-prof-use`(pass 2) `-fast -unroll2 -scalar-rep- -prefetch -opt-malloc-options=3`

482.sphinx3: `-fast -unroll2`

C++ benchmarks:

444.namd: `-prof-gen`(pass 1) `-prof-use`(pass 2) `-fast -fno-alias -auto-ilp32`

447.dealII: `-prof-gen`(pass 1) `-prof-use`(pass 2) `-fast -unroll2 -ansi-alias -scalar-rep-`

450.soplex: `-prof-gen`(pass 1) `-prof-use`(pass 2) `-fast -opt-malloc-options=3`

453.povray: `-prof-gen`(pass 1) `-prof-use`(pass 2) `-fast -unroll4 -ansi-alias`

Fortran benchmarks:

410.bwaves: `-fast -prefetch -parallel`

416.gamess: `-prof-gen`(pass 1) `-prof-use`(pass 2) `-fast -unroll2 -Ob0 -ansi-alias -scalar-rep-`

434.zeusmp: `-prof-gen`(pass 1) `-prof-use`(pass 2) `-fast`

437.leslie3d: `basepeak = yes`

459.GemsFDTD: `-prof-gen`(pass 1) `-prof-use`(pass 2) `-fast -unroll2 -Ob0 -prefetch -parallel`

465.tonto: `-prof-gen`(pass 1) `-prof-use`(pass 2) `-fast -unroll4 -auto`

Benchmarks using both Fortran and C:

435.gromacs: `-prof-gen`(pass 1) `-prof-use`(pass 2) `-fast -prefetch -auto-ilp32`

436.cactusADM: `-prof-gen`(pass 1) `-prof-use`(pass 2) `-fast -unroll2 -prefetch -parallel -auto-ilp32`

454.calculix: `-fast -unroll-aggressive -auto-ilp32`

Continued on next page

Peak Optimization Flags (Continued)

481.wrf: `-fast -parallel -prefetch -auto-ilp32`

The flags file that was used to format this result can be browsed at
`http://www.spec.org/cpu2006/flags/NEC-Intel-ic10.1-FP-intel64-linux-flags.html`

You can also download the XML flags source by saving the following link:
`http://www.spec.org/cpu2006/flags/NEC-Intel-ic10.1-FP-intel64-linux-flags.xml`

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.0.
Report generated on Tue Jul 22 19:59:54 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 8 July 2008.