



# SPEC® CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Hewlett-Packard Company

ProLiant DL160 G5  
(3.0 GHz, Intel Xeon E5472)

**SPECfp®2006 = 24.0**

**SPECfp\_base2006 = 20.2**

CPU2006 license: 3


Test sponsor: Hewlett-Packard Company

Tested by: Hewlett-Packard Company

**Test date:** Jun-2008

**Hardware Availability:** May-2008

**Software Availability:** Nov-2007

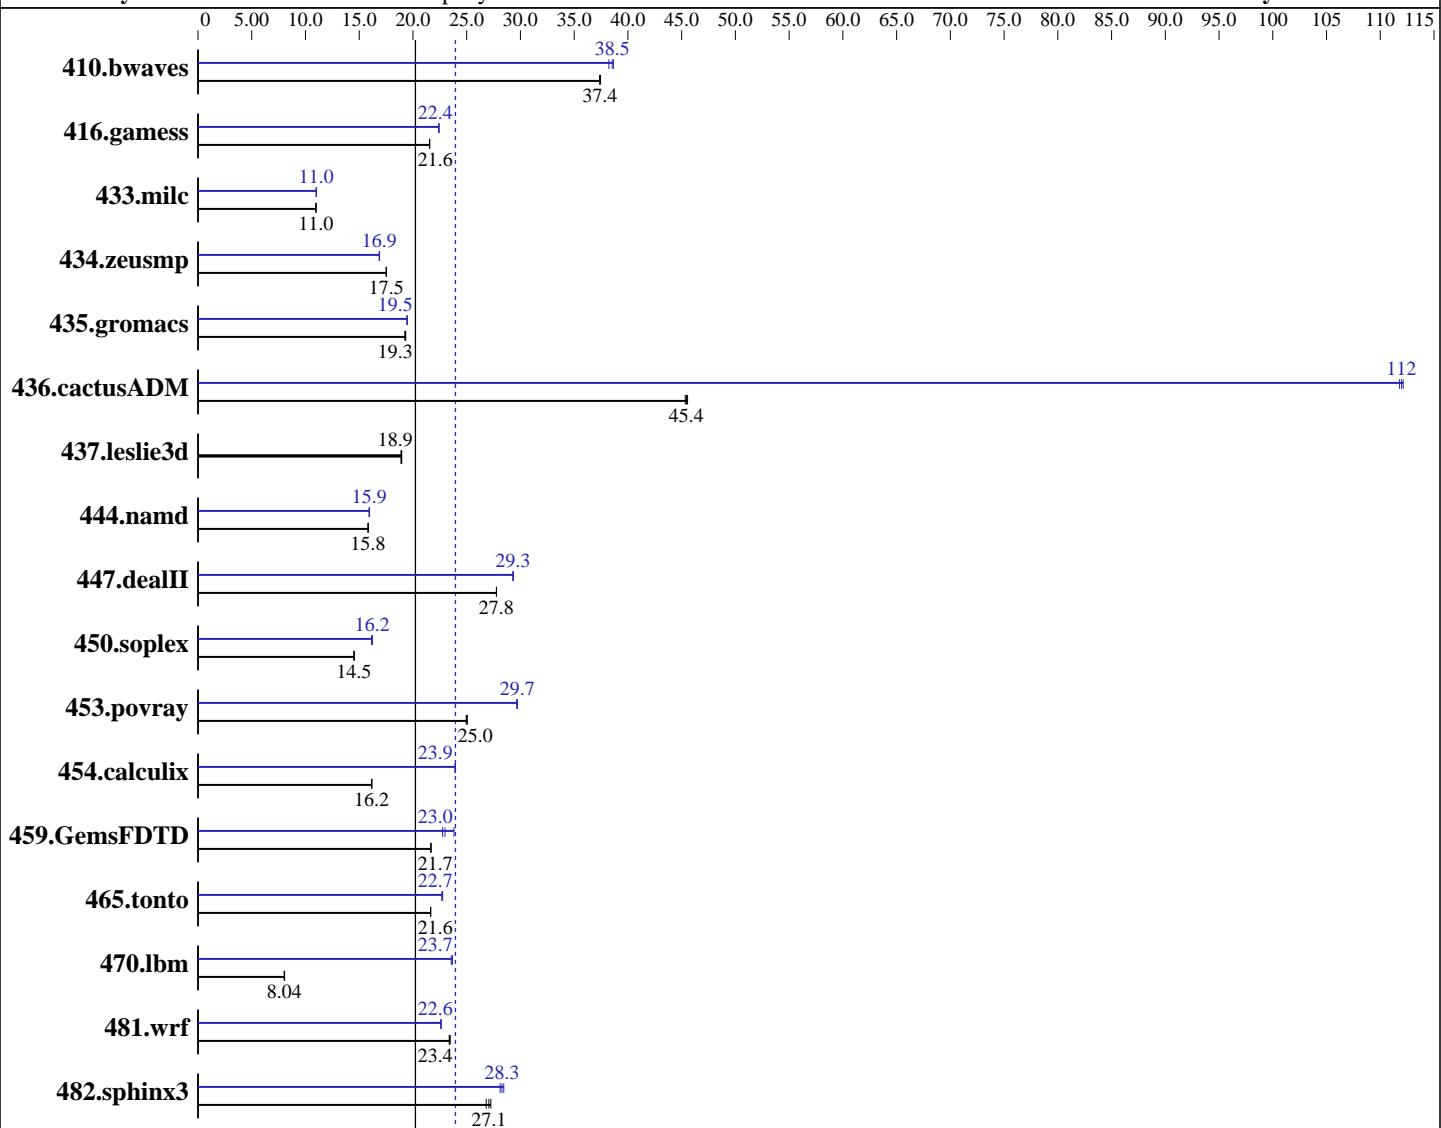

### Hardware

CPU Name: Intel Xeon E5472  
CPU Characteristics: 3.0 GHz, 2x6 MB L2 shared, 1600 MHz system bus  
CPU MHz: 3000  
FPU: Integrated  
CPU(s) enabled: 8 cores, 2 chips, 4 cores/chip  
CPU(s) orderable: 1,2 chips  
Primary Cache: 32 KB I + 32 KB D on chip per core  
Secondary Cache: 12 MB I+D on chip per chip, 6 MB shared / 2 cores

### Software

Operating System: SUSE Linux Enterprise Server 10 (x86\_64) SP1, Kernel 2.6.16.46-0.12-smp  
Compiler: Intel C++ Compiler 10.1 for Linux Build 20070913 Package ID: l\_cc\_p\_10.1.008  
Intel Fortran Compiler 10.1 for Linux Build 20070913 Package ID: l\_cc\_p\_10.1.008  
Auto Parallel: Yes  
File System: ext2  
System State: Run level 3 (multi-user)

Continued on next page

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Hewlett-Packard Company

ProLiant DL160 G5  
(3.0 GHz, Intel Xeon E5472)

**SPECfp2006 = 24.0**

**SPECfp\_base2006 = 20.2**

CPU2006 license: 3

Test date: Jun-2008

Test sponsor: Hewlett-Packard Company

Hardware Availability: May-2008

Tested by: Hewlett-Packard Company

Software Availability: Nov-2007

L3 Cache: None  
Other Cache: None  
Memory: 16 GB (4x4 GB PC2-6400F CL6)  
Disk Subsystem: 1x160 GB 7.2 K SATA  
Other Hardware: None

Base Pointers: 64-bit  
Peak Pointers: 32/64-bit  
Other Software: binutils-2.17.50

## Results Table

Benchmark	Base						Peak					
	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	363	37.5	<b>363</b>	<b>37.4</b>	364	37.4	355	38.2	352	38.7	<b>353</b>	<b>38.5</b>
416.gamess	909	21.5	<b>909</b>	<b>21.6</b>	908	21.6	873	22.4	874	22.4	<b>873</b>	<b>22.4</b>
433.milc	835	11.0	837	11.0	<b>837</b>	<b>11.0</b>	<b>834</b>	<b>11.0</b>	835	11.0	833	11.0
434.zeusmp	519	17.5	520	17.5	<b>519</b>	<b>17.5</b>	539	16.9	<b>539</b>	<b>16.9</b>	539	16.9
435.gromacs	<b>370</b>	<b>19.3</b>	369	19.3	371	19.2	367	19.5	367	19.5	<b>367</b>	<b>19.5</b>
436.cactusADM	262	45.6	<b>263</b>	<b>45.4</b>	264	45.3	107	112	107	112	<b>107</b>	<b>112</b>
437.leslie3d	<b>496</b>	<b>18.9</b>	496	19.0	498	18.9	<b>496</b>	<b>18.9</b>	496	19.0	498	18.9
444.namd	506	15.8	<b>507</b>	<b>15.8</b>	507	15.8	<b>503</b>	<b>15.9</b>	503	16.0	504	15.9
447.dealII	<b>412</b>	<b>27.8</b>	412	27.8	412	27.8	390	29.3	390	29.3	<b>390</b>	<b>29.3</b>
450.soplex	<b>574</b>	<b>14.5</b>	574	14.5	575	14.5	<b>514</b>	<b>16.2</b>	514	16.2	516	16.1
453.povray	<b>213</b>	<b>25.0</b>	213	25.0	212	25.1	179	29.7	<b>179</b>	<b>29.7</b>	179	29.7
454.calculix	511	16.2	510	16.2	<b>510</b>	<b>16.2</b>	<b>345</b>	<b>23.9</b>	345	23.9	345	23.9
459.GemsFDTD	490	21.7	<b>490</b>	<b>21.7</b>	490	21.7	466	22.8	<b>462</b>	<b>23.0</b>	445	23.8
465.tonto	455	21.6	<b>455</b>	<b>21.6</b>	454	21.7	432	22.8	<b>433</b>	<b>22.7</b>	433	22.7
470.lbm	1705	8.06	<b>1709</b>	<b>8.04</b>	1714	8.02	<b>581</b>	<b>23.7</b>	583	23.6	580	23.7
481.wrf	476	23.5	<b>477</b>	<b>23.4</b>	478	23.4	494	22.6	<b>494</b>	<b>22.6</b>	494	22.6
482.sphinx3	727	26.8	<b>720</b>	<b>27.1</b>	715	27.2	685	28.4	693	28.1	<b>689</b>	<b>28.3</b>

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Operating System Notes

'ulimit -s unlimited' was used to set the stacksize to unlimited prior to run  
OMP\_NUM\_THREADS set to number of cores  
KMP\_AFFINITY set to physical,0  
KMP\_STACKSIZE set to 200M

## Platform Notes

BIOS configuration:

Power Regulator set to Static High Performance Mode



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Hewlett-Packard Company

ProLiant DL160 G5  
(3.0 GHz, Intel Xeon E5472)

**SPECfp2006 = 24.0**

**SPECfp\_base2006 = 20.2**

**CPU2006 license:** 3

**Test sponsor:** Hewlett-Packard Company

**Tested by:** Hewlett-Packard Company

**Test date:** Jun-2008

**Hardware Availability:** May-2008

**Software Availability:** Nov-2007

## Base Compiler Invocation

C benchmarks:  
icc

C++ benchmarks:  
icpc

Fortran benchmarks:  
ifort

Benchmarks using both Fortran and C:  
icc ifort

## Base Portability Flags

```
410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
  433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
  444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
450.soplex: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
  465.tonto: -DSPEC_CPU_LP64
  470.lbm: -DSPEC_CPU_LP64
  481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64
```

## Base Optimization Flags

C benchmarks:  
-fast -parallel

C++ benchmarks:  
-fast -parallel

Fortran benchmarks:  
-fast -parallel

Benchmarks using both Fortran and C:  
-fast -parallel



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Hewlett-Packard Company

ProLiant DL160 G5  
(3.0 GHz, Intel Xeon E5472)

**SPECfp2006 = 24.0**

**SPECfp\_base2006 = 20.2**

**CPU2006 license:** 3

**Test sponsor:** Hewlett-Packard Company

**Tested by:** Hewlett-Packard Company

**Test date:** Jun-2008

**Hardware Availability:** May-2008

**Software Availability:** Nov-2007

## Peak Compiler Invocation

C benchmarks (except as noted below):

```
/opt/intel/cc/10.1.008/bin/icc -L/opt/intel/cc/10.1.008/lib  
-I/opt/intel/cc/10.1.008/include
```

433.milc: icc

C++ benchmarks (except as noted below):

```
icpc
```

```
450.soplex: /opt/intel/cc/10.1.008/bin/icpc -L/opt/intel/cc/10.1.008/lib  
-I/opt/intel/cc/10.1.008/include
```

Fortran benchmarks:

```
ifort
```

Benchmarks using both Fortran and C:

```
icc ifort
```

## Peak Portability Flags

```
410.bwaves: -DSPEC_CPU_LP64  
416.gamess: -DSPEC_CPU_LP64  
    433.milc: -DSPEC_CPU_LP64  
434.zeusmp: -DSPEC_CPU_LP64  
435.gromacs: -DSPEC_CPU_LP64 -nofor_main  
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main  
437.leslie3d: -DSPEC_CPU_LP64  
    444.namd: -DSPEC_CPU_LP64  
    447.dealII: -DSPEC_CPU_LP64  
    453.povray: -DSPEC_CPU_LP64  
454.calculix: -DSPEC_CPU_LP64 -nofor_main  
459.GemsFDTD: -DSPEC_CPU_LP64  
    465.tonto: -DSPEC_CPU_LP64  
    481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
```

## Peak Optimization Flags

C benchmarks:

```
433.milc: -prof-gen(pass 1) -prof-use(pass 2) -fast -fno-alias  
-auto-ilp32
```

```
470.lbm: -prof-gen(pass 1) -prof-use(pass 2) -fast -unroll12  
-scalar-rep -prefetch -opt-malloc-options=3
```

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Hewlett-Packard Company

ProLiant DL160 G5  
(3.0 GHz, Intel Xeon E5472)

**SPECfp2006 =** 24.0

**SPECfp\_base2006 =** 20.2

**CPU2006 license:** 3

**Test sponsor:** Hewlett-Packard Company

**Tested by:** Hewlett-Packard Company

**Test date:** Jun-2008

**Hardware Availability:** May-2008

**Software Availability:** Nov-2007

## Peak Optimization Flags (Continued)

482.sphinx3: -fast -unroll12

C++ benchmarks:

444.namd: -prof-gen(pass 1) -prof-use(pass 2) -fast -fno-alias  
-auto-ilp32

447.dealII: -prof-gen(pass 1) -prof-use(pass 2) -fast -unroll12  
-ansi-alias -scalar-rep-

450.soplex: -prof-gen(pass 1) -prof-use(pass 2) -fast  
-opt-malloc-options=3

453.povray: -prof-gen(pass 1) -prof-use(pass 2) -fast -unroll14  
-ansi-alias

Fortran benchmarks:

410.bwaves: -fast -prefetch -parallel

416.gamess: -prof-gen(pass 1) -prof-use(pass 2) -fast -unroll12 -O0  
-ansi-alias -scalar-rep-

434.zeusmp: -prof-gen(pass 1) -prof-use(pass 2) -fast

437.leslie3d: basepeak = yes

459.GemsFDTD: -prof-gen(pass 1) -prof-use(pass 2) -fast -unroll12 -O0  
-prefetch -parallel

465.tonto: -prof-gen(pass 1) -prof-use(pass 2) -fast -unroll14 -auto

Benchmarks using both Fortran and C:

435.gromacs: -prof-gen(pass 1) -prof-use(pass 2) -fast -prefetch  
-auto-ilp32

436.cactusADM: -prof-gen(pass 1) -prof-use(pass 2) -fast -unroll12  
-prefetch -parallel -auto-ilp32

454.calculix: -fast -unroll-aggressive -auto-ilp32

481.wrf: -fast -parallel -prefetch -auto-ilp32

The flags file that was used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/HP-Intel-ic10.1-linux-fp-flags.html>

You can also download the XML flags source by saving the following link:

<http://www.spec.org/cpu2006/flags/HP-Intel-ic10.1-linux-fp-flags.xml>



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Hewlett-Packard Company

ProLiant DL160 G5  
(3.0 GHz, Intel Xeon E5472)

**SPECfp2006 = 24.0**

**SPECfp\_base2006 = 20.2**

**CPU2006 license:** 3

**Test date:** Jun-2008

**Test sponsor:** Hewlett-Packard Company

**Hardware Availability:** May-2008

**Tested by:** Hewlett-Packard Company

**Software Availability:** Nov-2007

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.0.

Report generated on Tue Jul 22 20:00:37 2014 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 8 July 2008.