



SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

SPECint®_rate2006 = 165

IBM System x3755 (AMD Opteron 8350)

SPECint_rate_base2006 = 140

CPU2006 license: 11


Test sponsor: IBM Corporation

Tested by: Advanced Micro Devices

Test date: Jun-2008

Hardware Availability: Jul-2008

Software Availability: Jun-2008

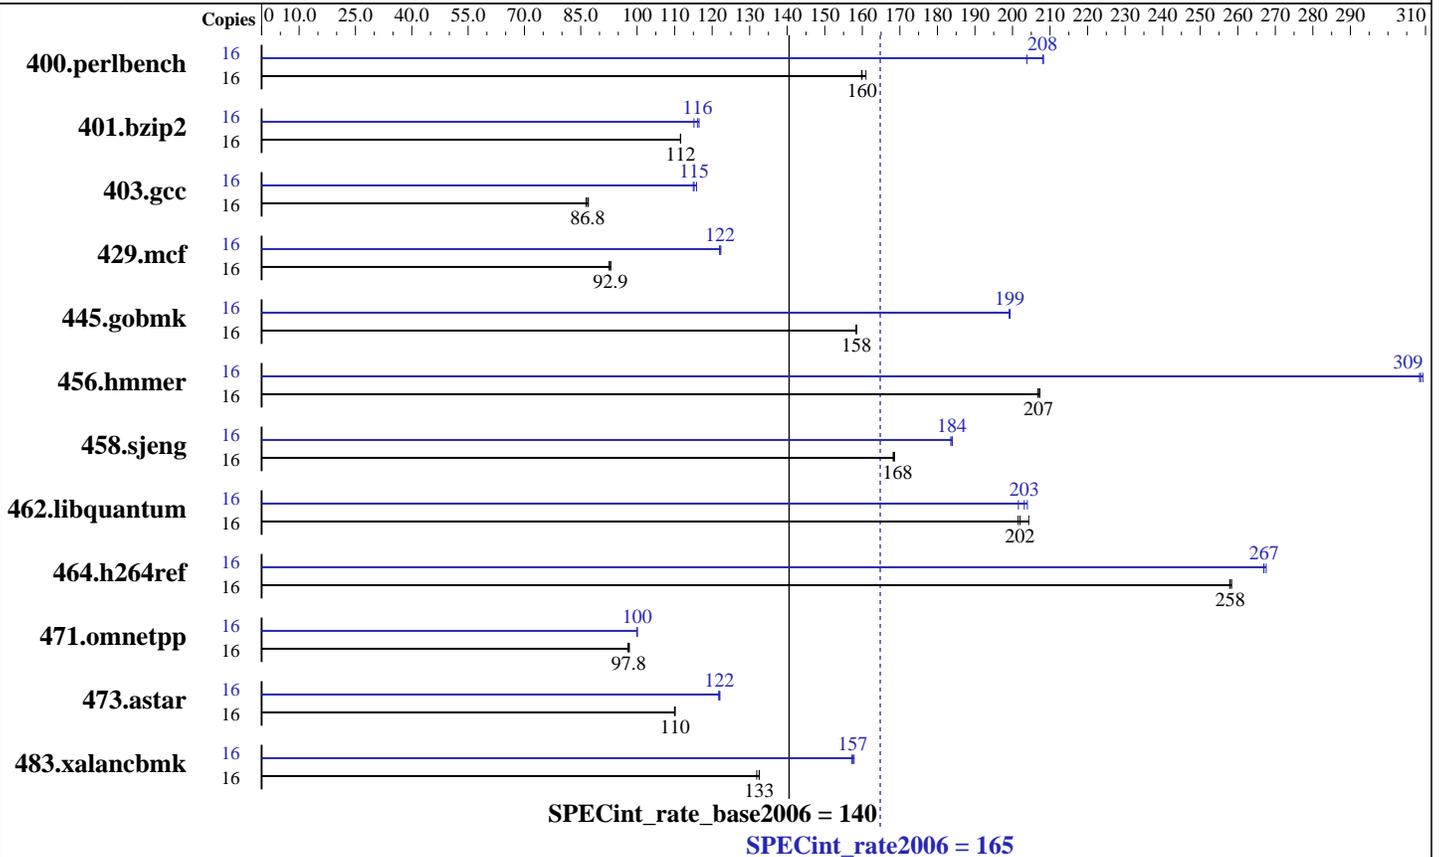

Hardware

CPU Name: AMD Opteron 8350
 CPU Characteristics: 2000
 CPU MHz: Integrated
 FPU: 16 cores, 4 chips, 4 cores/chip
 CPU(s) enabled: 1,2,3,4 chips
 CPU(s) orderable: 64 KB I + 64 KB D on chip per core
 Primary Cache: 512 KB I+D on chip per core
 Secondary Cache: 2 MB I+D on chip per chip
 L3 Cache: None
 Other Cache: None
 Memory: 32 GB (16 x 2 GB, DDR2-667 CL5 Reg Dual Rank)
 Disk Subsystem: 1 x 73.4 GB SAS, 15000 RPM
 Other Hardware: None

Software

Operating System: SuSE Linux Enterprise Server 10 (x86_64) SP1, Kernel 2.6.16.46-0.12-smp
 Compiler: PGI Server Complete Version 7.2 PathScale Compiler Suite Version 3.2
 Auto Parallel: No
 File System: ReiserFS
 System State: Run level 3 (Full multiuser with network)
 Base Pointers: 32/64-bit
 Peak Pointers: 32/64-bit
 Other Software: SmartHeap 8.0 32-bit Library for Linux



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

SPECint_rate2006 = 165

IBM System x3755 (AMD Opteron 8350)

SPECint_rate_base2006 = 140

CPU2006 license: 11

Test date: Jun-2008

Test sponsor: IBM Corporation

Hardware Availability: Jul-2008

Tested by: Advanced Micro Devices

Software Availability: Jun-2008

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	16	971	161	978	160	<u>977</u>	<u>160</u>	16	767	204	<u>751</u>	<u>208</u>	751	208
401.bzip2	16	1384	112	1384	112	<u>1384</u>	<u>112</u>	16	1341	115	<u>1330</u>	<u>116</u>	1325	117
403.gcc	16	1480	87.0	1490	86.4	<u>1483</u>	<u>86.8</u>	16	1120	115	<u>1118</u>	<u>115</u>	1112	116
429.mcf	16	1569	93.0	<u>1570</u>	<u>92.9</u>	1577	92.5	16	<u>1195</u>	<u>122</u>	1193	122	1196	122
445.gobmk	16	1060	158	<u>1059</u>	<u>158</u>	1059	158	16	842	199	<u>843</u>	<u>199</u>	843	199
456.hmmer	16	<u>721</u>	<u>207</u>	720	207	722	207	16	484	308	483	309	<u>484</u>	<u>309</u>
458.sjeng	16	<u>1150</u>	<u>168</u>	1148	169	1151	168	16	1052	184	1055	184	<u>1053</u>	<u>184</u>
462.libquantum	16	1645	202	<u>1641</u>	<u>202</u>	1623	204	16	1645	202	1625	204	<u>1632</u>	<u>203</u>
464.h264ref	16	<u>1372</u>	<u>258</u>	1373	258	1370	258	16	<u>1326</u>	<u>267</u>	1327	267	1323	268
471.omnetpp	16	<u>1022</u>	<u>97.8</u>	1021	98.0	1025	97.6	16	1000	100	999	100	<u>1000</u>	<u>100</u>
473.astar	16	1020	110	1021	110	<u>1020</u>	<u>110</u>	16	923	122	<u>921</u>	<u>122</u>	920	122
483.xalancbmk	16	837	132	833	133	<u>833</u>	<u>133</u>	16	<u>701</u>	<u>157</u>	702	157	700	158

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Operating System Notes

```
'numactl' was used to bind copies to the cores
'ulimit -s unlimited' was used to set environment stack size
'ulimit -l 2097152' was used to set environment locked pages in memory limit
Environment variable PGI_HUGE_PAGES set to 150
Set vm/nr_hugepages=2400 in /etc/sysctl.conf
mount -t hugetlbfs nodev /mnt/hugepages
```

Base Compiler Invocation

C benchmarks:

pgcc

C++ benchmarks:

pgcpp

Base Portability Flags

```
400.perlbench: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX_X64
401.bzip2: -DSPEC_CPU_LP64
403.gcc: -DSPEC_CPU_LP64
429.mcf: -DSPEC_CPU_LP64
445.gobmk: -DSPEC_CPU_LP64
456.hmmer: -DSPEC_CPU_LP64
```

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

SPECint_rate2006 = 165

IBM System x3755 (AMD Opteron 8350)

SPECint_rate_base2006 = 140

CPU2006 license: 11

Test date: Jun-2008

Test sponsor: IBM Corporation

Hardware Availability: Jul-2008

Tested by: Advanced Micro Devices

Software Availability: Jun-2008

Base Portability Flags (Continued)

458.sjeng: -DSPEC_CPU_LP64
462.libquantum: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX
464.h264ref: -DSPEC_CPU_LP64
483.xalancbmk: -DSPEC_CPU_LINUX

Base Optimization Flags

C benchmarks:

-fastsse -Msmartalloc=huge:150 -Mfprelaxed -Mipa=fast -Mipa=inline
-tp barcelona-64 -Bstatic_pgi

C++ benchmarks:

-fastsse -Msmartalloc=huge:150 -Mfprelaxed --zc_eh -Mipa=fast
-Mipa=inline -tp barcelona -Bstatic_pgi

Base Other Flags

C benchmarks:

-Mipa=jobs:4

C++ benchmarks:

-Mipa=jobs:4

Peak Compiler Invocation

C benchmarks (except as noted below):

pgcc

400.perlbench: pathcc

403.gcc: pathcc

445.gobmk: pathcc

464.h264ref: pathcc

C++ benchmarks (except as noted below):

pathCC

473.astar: pgcpp



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

SPECint_rate2006 = 165

IBM System x3755 (AMD Opteron 8350)

SPECint_rate_base2006 = 140

CPU2006 license: 11

Test date: Jun-2008

Test sponsor: IBM Corporation

Hardware Availability: Jul-2008

Tested by: Advanced Micro Devices

Software Availability: Jun-2008

Peak Portability Flags

400.perlbench: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX_X64
 401.bzip2: -DSPEC_CPU_LP64
 445.gobmk: -DSPEC_CPU_LP64
 456.hmmer: -DSPEC_CPU_LP64
 458.sjeng: -DSPEC_CPU_LP64
 462.libquantum: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX
 464.h264ref: -DSPEC_CPU_LP64
 483.xalanbmk: -DSPEC_CPU_LINUX

Peak Optimization Flags

C benchmarks:

400.perlbench: -march=barcelona -fb_create fbdata(pass 1)
 -fb_opt fbdata(pass 2) -Ofast -IPA:plimit=20000 -LNO:opt=0
 -WOPT:if_conv=0 -CG:local_sched_alg=1

401.bzip2: -Mpfi=indirect(pass 1) -Mpfo=indirect(pass 2) -fastsse -O4
 -Msmartalloc=huge:150 -Mprefetch=t0 -Mnounroll
 -tp barcelona-64 -Bstatic_pgi

403.gcc: -march=barcelona -fb_create fbdata(pass 1)
 -fb_opt fbdata(pass 2) -O3 -OPT:Ofast -m32

429.mcf: -fastsse -Msmartalloc=huge:150 -Mipa=fast -Mipa=inline:1
 -tp barcelona -Bstatic_pgi

445.gobmk: -march=barcelona -fb_create fbdata(pass 1)
 -fb_opt fbdata(pass 2) -O3 -OPT:alias=restrict
 -LNO:prefetch=1 -LNO:ignore_feedback=off -CG:p2align=on

456.hmmer: -fastsse -Mvect=partial -Munroll=n:8 -Msmartalloc=huge:150
 -Msafeptr -Mprefetch=t0 -Mfprelaxed -Mipa=const -Mipa=ptr
 -Mipa=arg -Mipa=inline -tp barcelona-64 -Bstatic_pgi

458.sjeng: -Mpfi(pass 1) -Mpfo(pass 2) -Mipa=fast(pass 2)
 -Mipa=inline:1(pass 2) -Mipa=noarg(pass 2) -fastsse
 -Msmartalloc=huge:150 -Mfprelaxed -tp barcelona-64
 -Bstatic_pgi

462.libquantum: -fastsse -Munroll=m:8 -Msmartalloc=huge:150
 -Mprefetch=distance:4 -Mfprelaxed -Mipa=fast -Mipa=inline
 -Mipa=noarg -tp barcelona-64 -Bstatic_pgi

464.h264ref: -march=barcelona -fb_create fbdata(pass 1)
 -fb_opt fbdata(pass 2) -O3 -IPA:plimit=20000
 -OPT:alias=disjoint -LNO:prefetch=0 -CG:ptr_load_use=0
 -CG:push_pop_int_saved_regs=off

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

SPECint_rate2006 = 165

IBM System x3755 (AMD Opteron 8350)

SPECint_rate_base2006 = 140

CPU2006 license: 11

Test date: Jun-2008

Test sponsor: IBM Corporation

Hardware Availability: Jul-2008

Tested by: Advanced Micro Devices

Software Availability: Jun-2008

Peak Optimization Flags (Continued)

C++ benchmarks:

471.omnetpp: -march=barcelona -Ofast -CG:gcm=off -INLINE:aggressive=on
-OPT:alias=disjoint -WOPT:if_conv=0 -m32 -lsmarheap

473.astar: -Mpfi(pass 1) -Mpfo(pass 2) -Mipa=fast(pass 2)
-Mipa=inline:6(pass 2) -fastsse -O4 -Msmartalloc=huge:150
-Msafeptr=global -Mfpelaxed --zc_eh -tp barcelona
-Bstatic_pgi

483.xalancbmk: -march=barcelona -Ofast -OPT:unroll_times_max=8
-CG:push_pop_int_saved_regs=off -CG:ptr_load_use=0 -m32
-lsmarheap

Peak Other Flags

C benchmarks:

429.mcf: -Mipa=jobs:4

456.hmmer: -Mipa=jobs:4

458.sjeng: -Mipa=jobs:4(pass 2)

462.libquantum: -Mipa=jobs:4

C++ benchmarks (except as noted below):

-L/root/work/cpu2006-amd421gh/amd421gh.libs/32

473.astar: -Mipa=jobs:4(pass 2)

The flags file that was used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/amd421GH-flags.20090713.00.html>

You can also download the XML flags source by saving the following link:

<http://www.spec.org/cpu2006/flags/amd421GH-flags.20090713.00.xml>



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

SPECint_rate2006 = 165

IBM System x3755 (AMD Opteron 8350)

SPECint_rate_base2006 = 140

CPU2006 license: 11

Test date: Jun-2008

Test sponsor: IBM Corporation

Hardware Availability: Jul-2008

Tested by: Advanced Micro Devices

Software Availability: Jun-2008

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.0.
Report generated on Tue Jul 22 20:03:55 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 22 July 2008.