



SPEC® CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Fujitsu Limited

SPECfp®_rate2006 = 582

Fujitsu SPARC Enterprise M8000

SPECfp_rate_base2006 = 538

CPU2006 license: 19


Test date: Jun-2008

Test sponsor: Fujitsu Limited

Hardware Availability: Jul-2008

Tested by: Sun Microsystems

Software Availability: Jul-2008

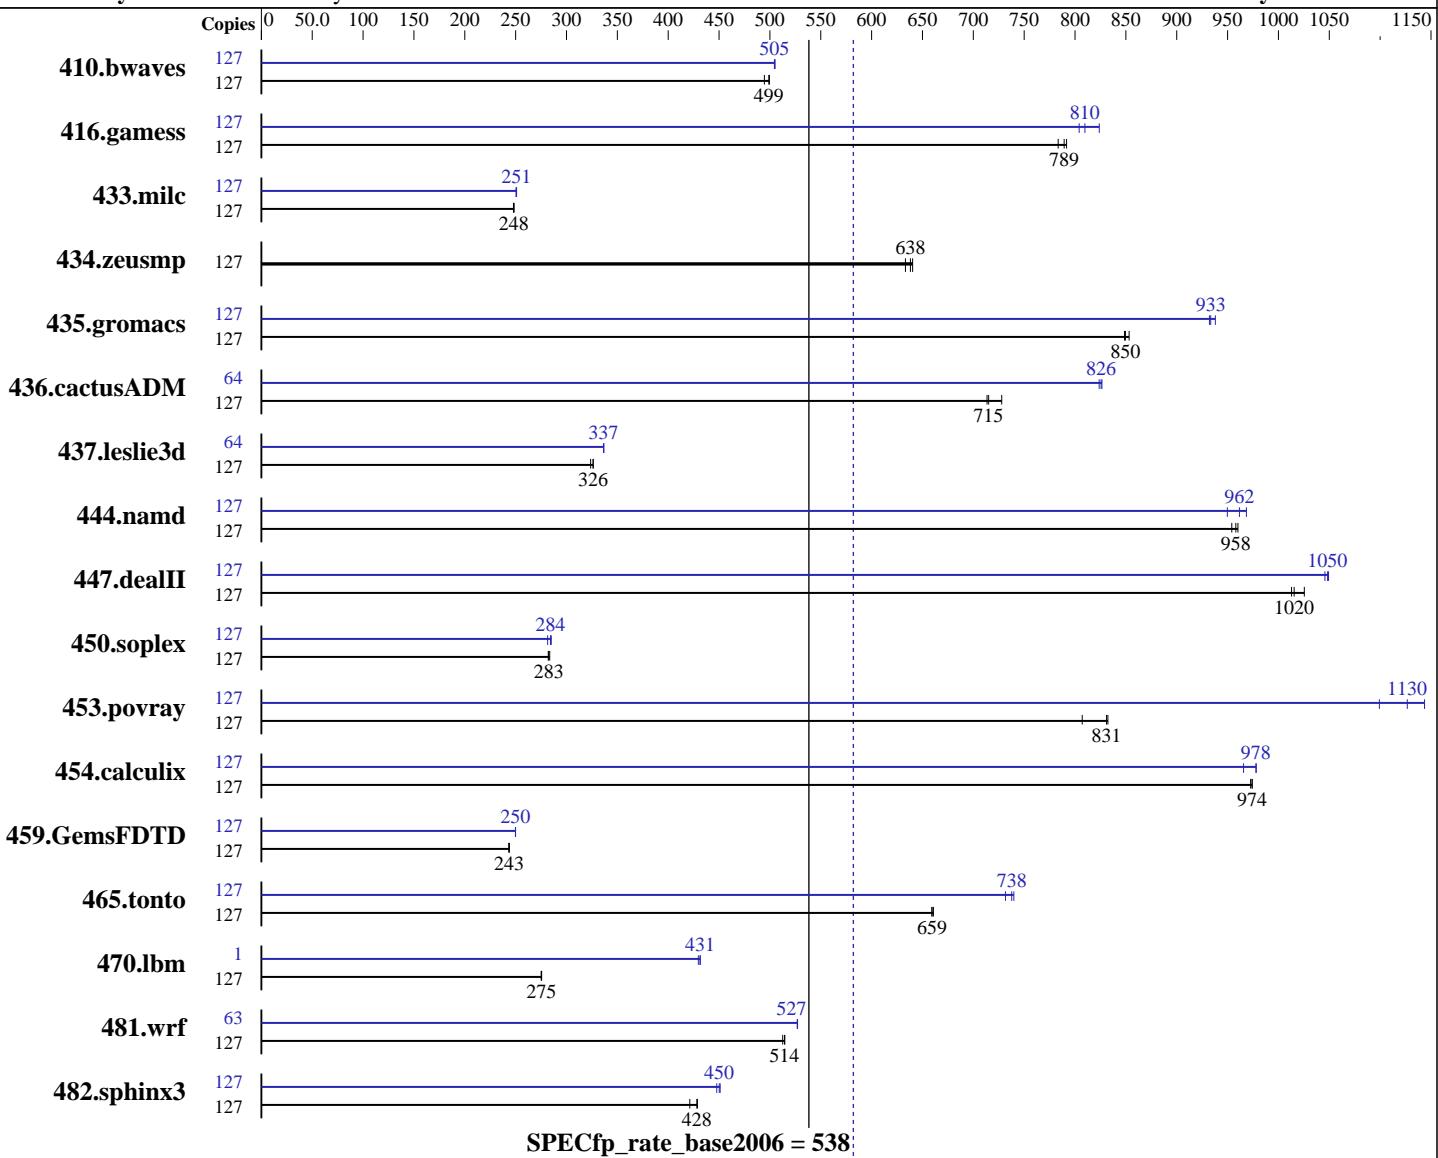

Hardware

CPU Name: SPARC64 VII
 CPU Characteristics:
 CPU MHz:
 FPU: Integrated
 CPU(s) enabled: 64 cores, 16 chips, 4 cores/chip, 2 threads/core
 CPU(s) orderable: 1 to 4 CMUs; each CMU contains 2 or 4 chips
 Primary Cache: 64 KB I + 64 KB D on chip per core
 Secondary Cache: 6 MB I+D on chip per chip

Software

Operating System: Solaris 10 5/08 with Patch 137111-03
 Compiler: Sun Studio 12 with patches 124867-06, 124861-07, 124863-05, 127000-05 (see patch information below)
 Auto Parallel: Yes
 File System: ufs
 System State: Default
 Base Pointers: 32-bit
 Peak Pointers: 32/64-bit

Continued on next page

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Fujitsu Limited

SPECfp_rate2006 = 582

Fujitsu SPARC Enterprise M8000

SPECfp_rate_base2006 = 538

CPU2006 license: 19

Test date: Jun-2008

Test sponsor: Fujitsu Limited

Hardware Availability: Jul-2008

Tested by: Sun Microsystems

Software Availability: Jul-2008

L3 Cache: None
 Other Cache: None
 Memory: 256 GB (128 x 2 GB)
 Disk Subsystem: 805 GB RAID 0 Solaris Volume
 12 x Fujitsu 73 GB 10000 RPM SAS
 Stripe interlace size 512 Kbytes
 Other Hardware: None

Other Software: None

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	127	3490	495	3459	499	3455	499	127	3417	505	3420	505	3422	504
416.gamess	127	3174	783	3141	792	3150	789	127	3071	810	3093	804	3018	824
433.milc	127	4700	248	4703	248	4692	248	127	4655	250	4651	251	4646	251
434.zeusmp	127	1825	633	1811	638	1805	640	127	1825	633	1811	638	1805	640
435.gromacs	127	1067	850	1063	853	1068	849	127	971	933	967	938	973	932
436.cactusADM	127	2122	715	2085	728	2127	713	64	925	826	928	824	926	826
437.leslie3d	127	3660	326	3659	326	3688	324	64	1788	336	1787	337	1788	337
444.namd	127	1068	954	1063	958	1061	960	127	1072	950	1059	962	1052	969
447.dealII	127	1431	1020	1417	1030	1434	1010	127	1386	1050	1389	1050	1385	1050
450.soplex	127	3749	283	3755	282	3736	284	127	3763	281	3725	284	3716	285
453.povray	127	812	832	813	831	837	807	127	600	1130	591	1140	615	1100
454.calculix	127	1076	974	1076	974	1077	973	127	1071	978	1085	966	1071	978
459.GemsFDTD	127	5530	244	5536	243	5534	243	127	5393	250	5394	250	5392	250
465.tonto	127	1891	661	1895	659	1895	659	127	1694	738	1708	732	1689	740
470.lbm	127	6334	276	6344	275	6334	275	1	32.0	430	31.9	431	31.8	432
481.wrf	127	2768	513	2758	514	2757	515	63	1335	527	1335	527	1335	527
482.sphinx3	127	5774	429	5876	421	5781	428	127	5528	448	5498	450	5487	451

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Compiler Invocation Notes

Sun Studio compiler patches are available at

http://developers.sun.com/sunstudio/downloads/patches/ss12_patches.jsp

Submit Notes

Processes were assigned to specific processors using 'pbind' commands. The config file option 'submit' was used, along with a list of processors in the 'BIND' variable, to generate the pbind commands. (For details, please see the config file.)



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Fujitsu Limited

SPECfp_rate2006 = 582

Fujitsu SPARC Enterprise M8000

SPECfp_rate_base2006 = 538

CPU2006 license: 19

Test date: Jun-2008

Test sponsor: Fujitsu Limited

Hardware Availability: Jul-2008

Tested by: Sun Microsystems

Software Availability: Jul-2008

Operating System Notes

Environment Variable Settings:

The maximum number of threads a program can create was set with:
OMP_NUM_THREADS=127

Program threads were bound to processors with:
SUNW_MP_PROCBIND="1-127"

Behavior of parallel threads was set with:
SUNW_MP_THR_IDLE=SPIN

SPIN specifies that an idle thread should spin while waiting at barrier
or waiting for new parallel regions to work on.

System Tunables (/etc/system parameters):

```
tune_t_fsflushr=10
    Controls how many seconds elapse between runs of the
    page flush daemon, fsflush.
autoup=300
    Causes pages older than the listed number of seconds to
    be written by fsflush.
bufhwm=3000
    Memory byte limit for caching I/O buffers
segmap_percent=3
    Set maximum percent memory for file system cache
lpg_alloc_prefer=1
    Set lgroup page allocation to strongly prefer local pages
```

Other System Settings:

The webconsole service was turned off using
 svcadm disable webconsole

Platform Notes

Memory is 8-way interleaved by filling all slots with
the same capacity DIMMs.

This result is measured on a Sun SPARC Enterprise M8000 Server.
Note that the Sun SPARC Enterprise M8000 and Fujitsu SPARC Enterprise
M8000 are electrically equivalent.



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Fujitsu Limited

SPECfp_rate2006 = 582

Fujitsu SPARC Enterprise M8000

SPECfp_rate_base2006 = 538

CPU2006 license: 19

Test date: Jun-2008

Test sponsor: Fujitsu Limited

Hardware Availability: Jul-2008

Tested by: Sun Microsystems

Software Availability: Jul-2008

Base Compiler Invocation

C benchmarks:

cc

C++ benchmarks:

CC

Fortran benchmarks:

f90

Benchmarks using both Fortran and C:

cc f90

Base Optimization Flags

C benchmarks:

```
-fast -fma=fused -xipo=2 -xpagesize=4M -xprefetch_level=1  
-xalias_level=std -xprefetch_auto_type=indirect_array_access
```

C++ benchmarks:

```
-xdepend -library=stlport4 -fast -fma=fused -xipo=2 -xpagesize=4M  
-xprefetch_level=1 -xalias_level=compatible
```

Fortran benchmarks:

```
-fast -fma=fused -xipo=2 -xpagesize=4M -xprefetch_level=1
```

Benchmarks using both Fortran and C:

```
-fast(cc) -fast(f90) -fma=fused -xipo=2 -xpagesize=4M  
-xprefetch_level=1 -xalias_level=std  
-xprefetch_auto_type=indirect_array_access
```

Base Other Flags

C benchmarks:

```
-xjobs=16 -V -#
```

C++ benchmarks:

```
-xjobs=16 -verbose=diags,version
```

Fortran benchmarks:

```
-xjobs=16 -V -v
```

Benchmarks using both Fortran and C:

```
-xjobs=16 -V -# -v
```



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Fujitsu Limited

SPECfp_rate2006 = 582

Fujitsu SPARC Enterprise M8000

SPECfp_rate_base2006 = 538

CPU2006 license: 19

Test date: Jun-2008

Test sponsor: Fujitsu Limited

Hardware Availability: Jul-2008

Tested by: Sun Microsystems

Software Availability: Jul-2008

Peak Compiler Invocation

C benchmarks:

cc

C++ benchmarks:

CC

Fortran benchmarks:

f90

Benchmarks using both Fortran and C:

cc f90

Peak Optimization Flags

C benchmarks:

```
433.milc: -fast -xpagesize=4M -xipo=2 -xprefetch_level=2 -fsimple=1  
          -xprefetch_auto_type=indirect_array_access  
          -W2,-Ainline:rs=400 -xalias_level=std -fma=fused
```

```
470.lbm: -fast -xipo=2 -xprefetch=latx:0.1 -m64 -xvector  
          -xalias_level=strong -xprefetch_level=3  
          -xprefetch_auto_type=indirect_array_access -xarch=generic  
          -xautopar -xreduction
```

```
482.sphinx3: -xprofile=collect:./feedback(pass 1)  
             -xprofile=use:./feedback(pass 2) -fast -xpagesize=4M  
             -xinline= -xprefetch=no -xalias_level=strong -fma=fused  
             -lfast
```

C++ benchmarks:

```
444.namd: -xdepend -library=stlport4 -fast -xpagesize=4M  
          -xalias_level=compatible -fma=fused -xprefetch=latx:7
```

```
447.dealII: -xdepend -library=stlport4  
             -xprofile=collect:./feedback(pass 1)  
             -xprofile=use:./feedback(pass 2) -fast -xpagesize=4M  
             -xalias_level=compatible -xipo=2 -xrestrict -fma=fused
```

```
450.soplex: -xdepend -library=stlport4  
             -xprofile=collect:./feedback(pass 1)  
             -xprofile=use:./feedback(pass 2) -fast -xpagesize=4M  
             -xalias_level=compatible -xipo=2 -xprefetch=no -fsimple=0  
             -xrestrict
```

453.povray: Same as 447.dealII

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Fujitsu Limited

SPECfp_rate2006 = 582

Fujitsu SPARC Enterprise M8000

SPECfp_rate_base2006 = 538

CPU2006 license: 19

Test date: Jun-2008

Test sponsor: Fujitsu Limited

Hardware Availability: Jul-2008

Tested by: Sun Microsystems

Software Availability: Jul-2008

Peak Optimization Flags (Continued)

Fortran benchmarks:

```
410.bwaves: -fast -xpagesize=4M -xipo=2 -xprefetch_level=2 -fma=fused
416.gamess: -xprofile=collect:./feedback(pass 1)
             -xprofile=use:./feedback(pass 2) -fast -xpagesize=4M
             -xipo=2 -xprefetch_level=2 -fma=fused
434.zeusmp: basepeak = yes
437.leslie3d: -fast -xpagesize=4M -fma=fused -xipo=2 -xprefetch=latx:4
               -xprefetch_level=2
459.GemsFDTD: -fast -xpagesize=4M -fsimple=1 -xprefetch=no -fma=fused
465.tonto: -xprofile=collect:./feedback(pass 1)
            -xprofile=use:./feedback(pass 2) -fast -xpagesize=4M
            -xipo=2 -xprefetch=no -xarch=generic -lfast
```

Benchmarks using both Fortran and C:

```
435.gromacs: -xprofile=collect:./feedback(pass 1)
              -xprofile=use:./feedback(pass 2) -fast(cc) -fast(f90)
              -xpagesize=4M -xipo=2 -xarch=generic -xchip=generic
              -fsimple=0 -xunroll=5 -xprefetch=latx:0.5
436.cactusADM: -fast(cc) -fast(f90) -xpagesize=4M -xipo=2 -fma=fused
454.calculix: -fast(cc) -fast(f90) -xpagesize=4M -xipo=2
               -xprefetch_level=3 -fma=fused -xprefetch=latx:3.0
               -xalias_level=std
481.wrf: -fast(cc) -fast(f90) -xpagesize=4M -xipo=2
          -xprefetch_level=3 -fma=fused -xunroll=8
```

Peak Other Flags

C benchmarks:

```
-xjobs=16 -V -#
```

C++ benchmarks:

```
-xjobs=16 -verbose=diags,version
```

Fortran benchmarks:

```
-xjobs=16 -V -v
```

Benchmarks using both Fortran and C:

```
-xjobs=16 -V -# -v
```



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Fujitsu Limited

SPECfp_rate2006 = 582

Fujitsu SPARC Enterprise M8000

SPECfp_rate_base2006 = 538

CPU2006 license: 19

Test date: Jun-2008

Test sponsor: Fujitsu Limited

Hardware Availability: Jul-2008

Tested by: Sun Microsystems

Software Availability: Jul-2008

The flags file that was used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Sun-Solaris-Studio12-and-gccfss4.2.20090713.html>

You can also download the XML flags source by saving the following link:

<http://www.spec.org/cpu2006/flags/Sun-Solaris-Studio12-and-gccfss4.2.20090713.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.1.

Report generated on Tue Jul 22 18:48:46 2014 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 5 August 2008.