SPEC® CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Fujitsu Limited

Fujitsu SPARC Enterprise M9000

SPECfp®_rate2006 = 2010

SPECfp_rate_base2006 = 1860

CPU2006 license: 19
Test sponsor: Fujitsu Limited
Tested by: Sun Microsystems

Test date: Jul-2008
Hardware Availability: Jul-2008
Software Availability: Jul-2008

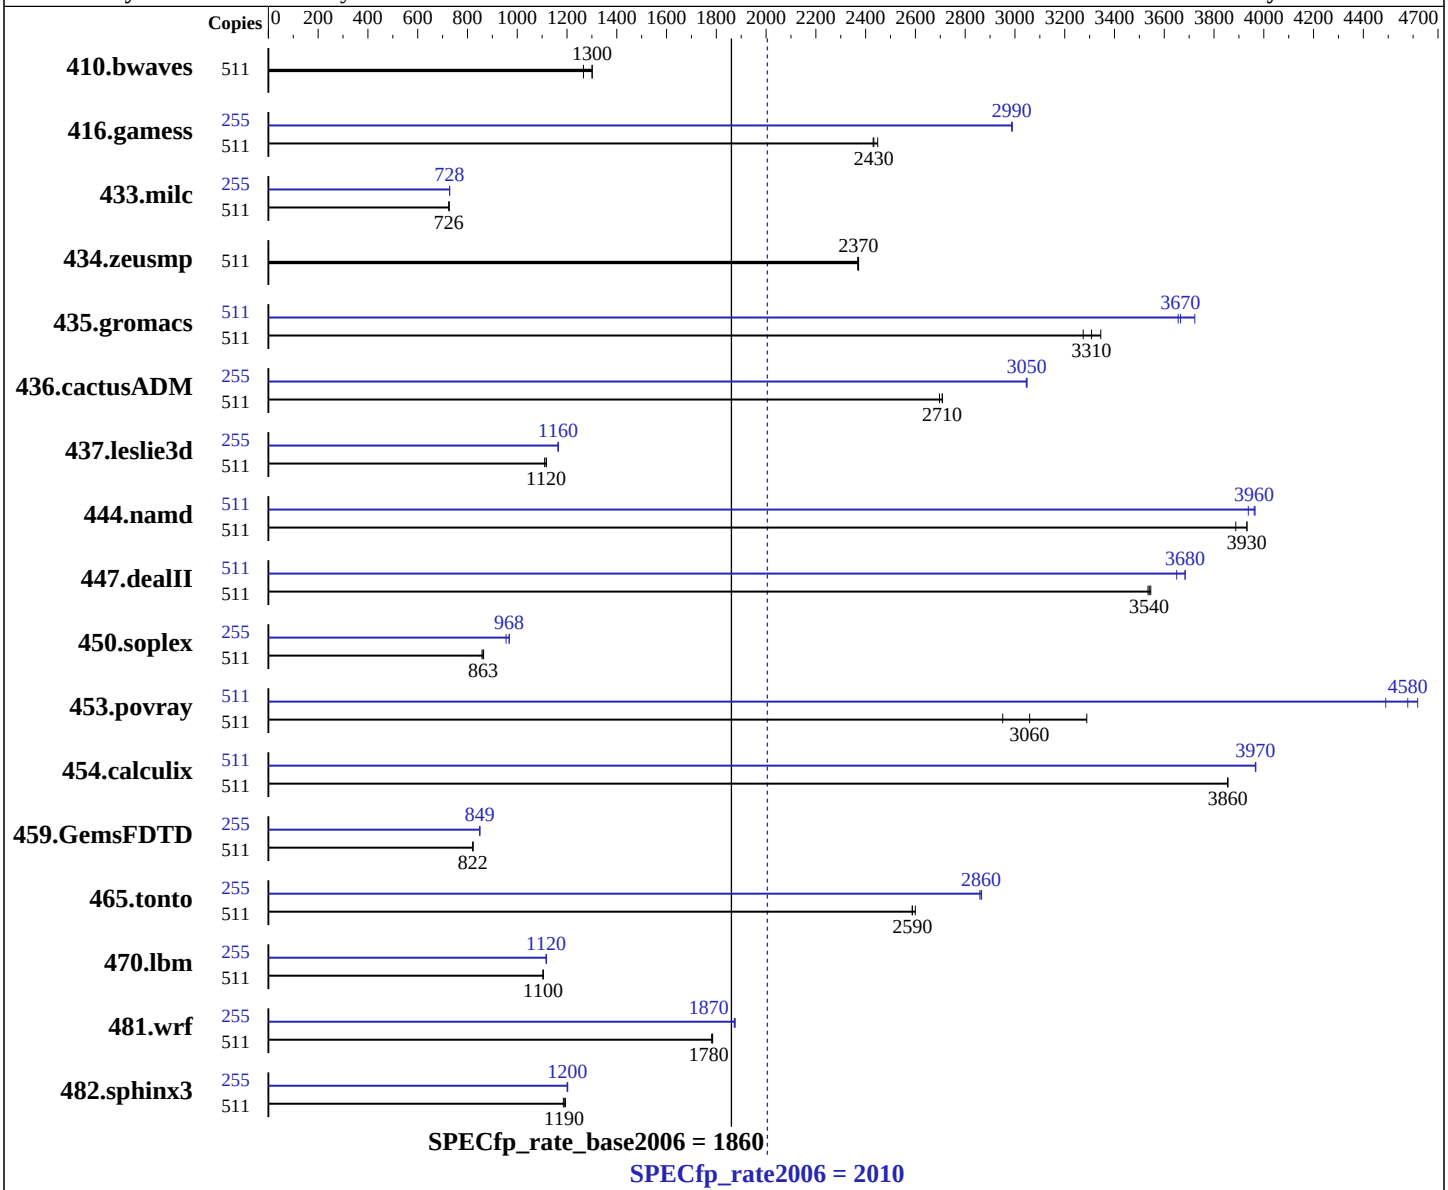

Hardware

CPU Name:	SPARC64 VII
CPU Characteristics:	
CPU MHz:	2520
FPU:	Integrated
CPU(s) enabled:	256 cores, 64 chips, 4 cores/chip, 2 threads/core
CPU(s) orderable:	1 to 16 CMUs; each CMU contains 2 or 4 chips
Primary Cache:	64 KB I + 64 KB D on chip per core
Secondary Cache:	6 MB I+D on chip per chip

Continued on next page

Software

Operating System:	Solaris 10 5/08 with Patch 137111-03
Compiler:	Sun Studio 12 with patches 124867-06, 124861-07, 124863-05, 127000-05 (see patch information below)
Auto Parallel:	No
File System:	ufs
System State:	Default
Base Pointers:	32-bit
Peak Pointers:	32-bit

Continued on next page

SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Fujitsu Limited

Fujitsu SPARC Enterprise M9000

SPECfp_rate2006 = 2010

SPECfp_rate_base2006 = 1860

CPU2006 license: 19
Test sponsor: Fujitsu Limited
Tested by: Sun Microsystems

Test date: Jul-2008
Hardware Availability: Jul-2008
Software Availability: Jul-2008

L3 Cache: None
Other Cache: None
Memory: 1 TB (512 x 2 GB)
Disk Subsystem: 12 TB RAID 0 Solaris Volume
24 x 500 GB 15000 RPM disk
Stripe interlace size 128Kbytes
Other Hardware: None

Other Software: None

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	511	5485	1270	5337	1300	**5338**	**1300**	511	5485	1270	5337	1300	**5338**	**1300**
416.gamess	511	4117	2430	**4112**	**2430**	4087	2450	255	**1671**	**2990**	1671	2990	1670	2990
433.milc	511	6463	726	**6464**	**726**	6464	726	255	3215	728	**3215**	**728**	3215	728
434.zeusmp	511	1961	2370	**1961**	**2370**	1964	2370	511	1961	2370	**1961**	**2370**	1964	2370
435.gromacs	511	1091	3340	1114	3270	**1103**	**3310**	511	998	3660	980	3720	**995**	**3670**
436.cactusADM	511	2264	2700	2255	2710	**2255**	**2710**	255	1000	3050	**1000**	**3050**	1001	3050
437.leslie3d	511	**4303**	**1120**	4300	1120	4327	1110	255	2059	1160	2057	1170	**2058**	**1160**
444.namd	511	1054	3890	1042	3930	**1042**	**3930**	511	1034	3960	**1035**	**3960**	1041	3940
447.dealII	511	**1651**	**3540**	1654	3530	1649	3550	511	1602	3650	1587	3680	**1587**	**3680**
450.soplex	511	4964	859	4928	865	**4940**	**863**	255	2227	955	2197	968	**2198**	**968**
453.povray	511	**889**	**3060**	827	3290	921	2950	511	605	4490	**594**	**4580**	589	4620
454.calculix	511	**1094**	**3860**	1094	3850	1093	3860	511	1062	3970	**1063**	**3970**	1063	3970
459.GemsFDTD	511	6599	822	**6598**	**822**	6595	822	255	3185	850	**3185**	**849**	3186	849
465.tonto	511	1944	2590	**1943**	**2590**	1934	2600	255	878	2860	876	2870	**876**	**2860**
470.lbm	511	6357	1100	**6358**	**1100**	6360	1100	255	3136	1120	3138	1120	**3138**	**1120**
481.wrf	511	**3200**	**1780**	3197	1790	3204	1780	255	1522	1870	1519	1880	**1520**	**1870**
482.sphinx3	511	8342	1190	8403	1190	**8377**	**1190**	255	4139	1200	**4137**	**1200**	4131	1200

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Compiler Invocation Notes

```
Sun Studio compiler patches are available at
    http://developers.sun.com/sunstudio/downloads/patches/ss12_patches.jsp
```

Submit Notes

```
Processes were assigned to specific processors using 'pbind' commands.  The
config file option 'submit' was used, along with a list of processors in the
'BIND' variable, to generate the pbind commands.  (For details, please see
the config file.)
```

Operating System Notes

```
Environment Variable Settings:

export LD_PRELOAD=mpss.so.1:madv.so.1
export MPSSHEAP=4MB
export MPSSSTACK=4MB
    Requests system to use 4 MB pages when possible.
export MADV access_lwp
    access_lwp requests that the next light weight process to touch
    the specified address range will access it most heavily.
ulimit -s 131072 was used to limit the space consumed
    by the stack (making more space available for the heap)

System Tunables (/etc/system parameters):

autoup=200
    Causes pages older than the listed number of seconds to
    be written by fsflush.
lpg_alloc_prefer=1
    Set lgroup page allocation to strongly prefer local pages

Other System Settings:

The webconsole service was turned off using
    svcadm disable webconsole

The SPEC toolset was bound to processors 1-511 using processor sets:
    psrset -c 1-511
    psrset -e 1 ksh
```

Platform Notes

```
Memory is 8-way interleaved by filling all slots with
the same capacity DIMMs.

This result is measured on a Sun SPARC Enterprise M9000 Server.
Note that the Sun SPARC Enterprise M9000 and Fujitsu SPARC Enterprise
M9000 are electrically equivalent.
```

Base Compiler Invocation

C benchmarks:
```
cc
```

C++ benchmarks:
```
CC
```

Continued on next page

Base Compiler Invocation (Continued)

Fortran benchmarks:
f90

Benchmarks using both Fortran and C:
cc f90

Base Optimization Flags

C benchmarks:
-fast -xipo=2 -xpagesize=4M -xprefetch_level=1 -fma=fused
-xalias_level=std -xprefetch_auto_type=indirect_array_access -ll2amm

C++ benchmarks:
-library=stlport4 -fast -xipo=2 -xpagesize=4M -xprefetch_level=1
-fma=fused -xalias_level=compatible -ll2amm

Fortran benchmarks:
-fast -xipo=2 -xpagesize=4M -xprefetch_level=1 -fma=fused -ll2amm

Benchmarks using both Fortran and C:
-fast(cc) -fast(f90) -xipo=2 -xpagesize=4M -xprefetch_level=1
-fma=fused -xalias_level=std -xprefetch_auto_type=indirect_array_access
-ll2amm

Peak Compiler Invocation

C benchmarks:
cc

C++ benchmarks:
CC

Fortran benchmarks:
f90

Benchmarks using both Fortran and C:
cc f90

Peak Optimization Flags

C benchmarks:

433.milc: -fast -xipo=2 -xpagesize=4M -fma=fused
-xalias_level=strong -xprefetch_level=2
-xprefetch_auto_type=indirect_array_access -xprefetch=latx:5

Continued on next page

Peak Optimization Flags (Continued)

433.milc (continued):
-ll2amm

470.lbm: -xprofile=collect:./feedback(pass 1)
-xprofile=use:./feedback(pass 2) -fast -xrestrict -xipo=2
-xprefetch_level=2 -xarch=v8plusb -ll2amm

482.sphinx3: -xprofile=collect:./feedback(pass 1)
-xprofile=use:./feedback(pass 2) -fast -xipo=2
-xpagesize=4M -fma=fused -xinline= -xalias_level=strong
-xprefetch_level=2 -lfast -ll2amm

C++ benchmarks:

444.namd: -library=stlport4 -fast -xipo=2 -xpagesize=4M -fma=fused
-xdepend -xalias_level=compatible -xprefetch_level=1
-xprefetch=latx:0.5 -ll2amm

447.dealII: -library=stlport4 -xprofile=collect:./feedback(pass 1)
-xprofile=use:./feedback(pass 2) -fast -xipo=2
-xpagesize=4M -fma=fused -xdepend -xalias_level=compatible
-xrestrict -xprefetch=no -ll2amm

450.soplex: -library=stlport4 -xprofile=collect:./feedback(pass 1)
-xprofile=use:./feedback(pass 2) -fast -xipo=2
-xpagesize=4M -fma=fused -xdepend -xalias_level=compatible
-fsimple=0 -xrestrict -xprefetch=no -ll2amm

453.povray: -library=stlport4 -xprofile=collect:./feedback(pass 1)
-xprofile=use:./feedback(pass 2) -fast -xipo=2
-xpagesize=4M -fma=fused -xdepend -xalias_level=compatible
-xprefetch=latx:5.0 -ll2amm

Fortran benchmarks:

410.bwaves: basepeak = yes

416.gamess: -xprofile=collect:./feedback(pass 1)
-xprofile=use:./feedback(pass 2) -fast -xipo=2
-xpagesize=4M -fma=fused -xprefetch_level=1 -ll2amm

434.zeusmp: basepeak = yes

437.leslie3d: -fast -xipo=2 -xpagesize=4M -fma=fused -xprefetch=latx:5.0
-ll2amm

459.GemsFDTD: -fast -xipo=2 -xpagesize=4M -fma=fused -fsimple=1
-xprefetch=no -ll2amm

Continued on next page

Peak Optimization Flags (Continued)

465.tonto: `-fast -xipo=2 -xpagesize=4M -fma=fused -xprefetch=no -lfast -ll2amm`

Benchmarks using both Fortran and C:

435.gromacs: `-xprofile=collect:./feedback`(pass 1) `-xprofile=use:./feedback`(pass 2) `-fast`(cc) `-fast`(f90) `-xipo=2 -xpagesize=4M -fma=fused -fsimple=0 -xprefetch=latx:0.5 -xarch=generic -xchip=generic`

436.cactusADM: `-fast`(cc) `-fast`(f90) `-xipo=2 -xpagesize=4M -fma=fused -ll2amm`

454.calculix: `-fast`(cc) `-fast`(f90) `-xipo=2 -xpagesize=4M -fma=fused -xprefetch=latx:3.0 -ll2amm`

481.wrf: `-xprofile=collect:./feedback`(pass 1) `-xprofile=use:./feedback`(pass 2) `-fast`(cc) `-fast`(f90) `-xipo=2 -xpagesize=4M -fma=fused -xprefetch=no -ll2amm`

The flags file that was used to format this result can be browsed at
`http://www.spec.org/cpu2006/flags/Sun-Solaris-Studio12-and-gccfss4.2.20090713.00.html`

You can also download the XML flags source by saving the following link:
`http://www.spec.org/cpu2006/flags/Sun-Solaris-Studio12-and-gccfss4.2.20090713.00.xml`

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.1.
Report generated on Tue Jul 22 18:53:15 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 5 August 2008.