SPEC® CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

NEC Corporation

Express5800/110Ri-1
(Intel Xeon E3110)

SPECfp®2006 = 23.4

SPECfp_base2006 = 22.1

CPU2006 license: 9006
Test sponsor: NEC Corporation
Tested by: NEC Corporation

Test date: Jul-2008
Hardware Availability: Apr-2008
Software Availability: Nov-2007

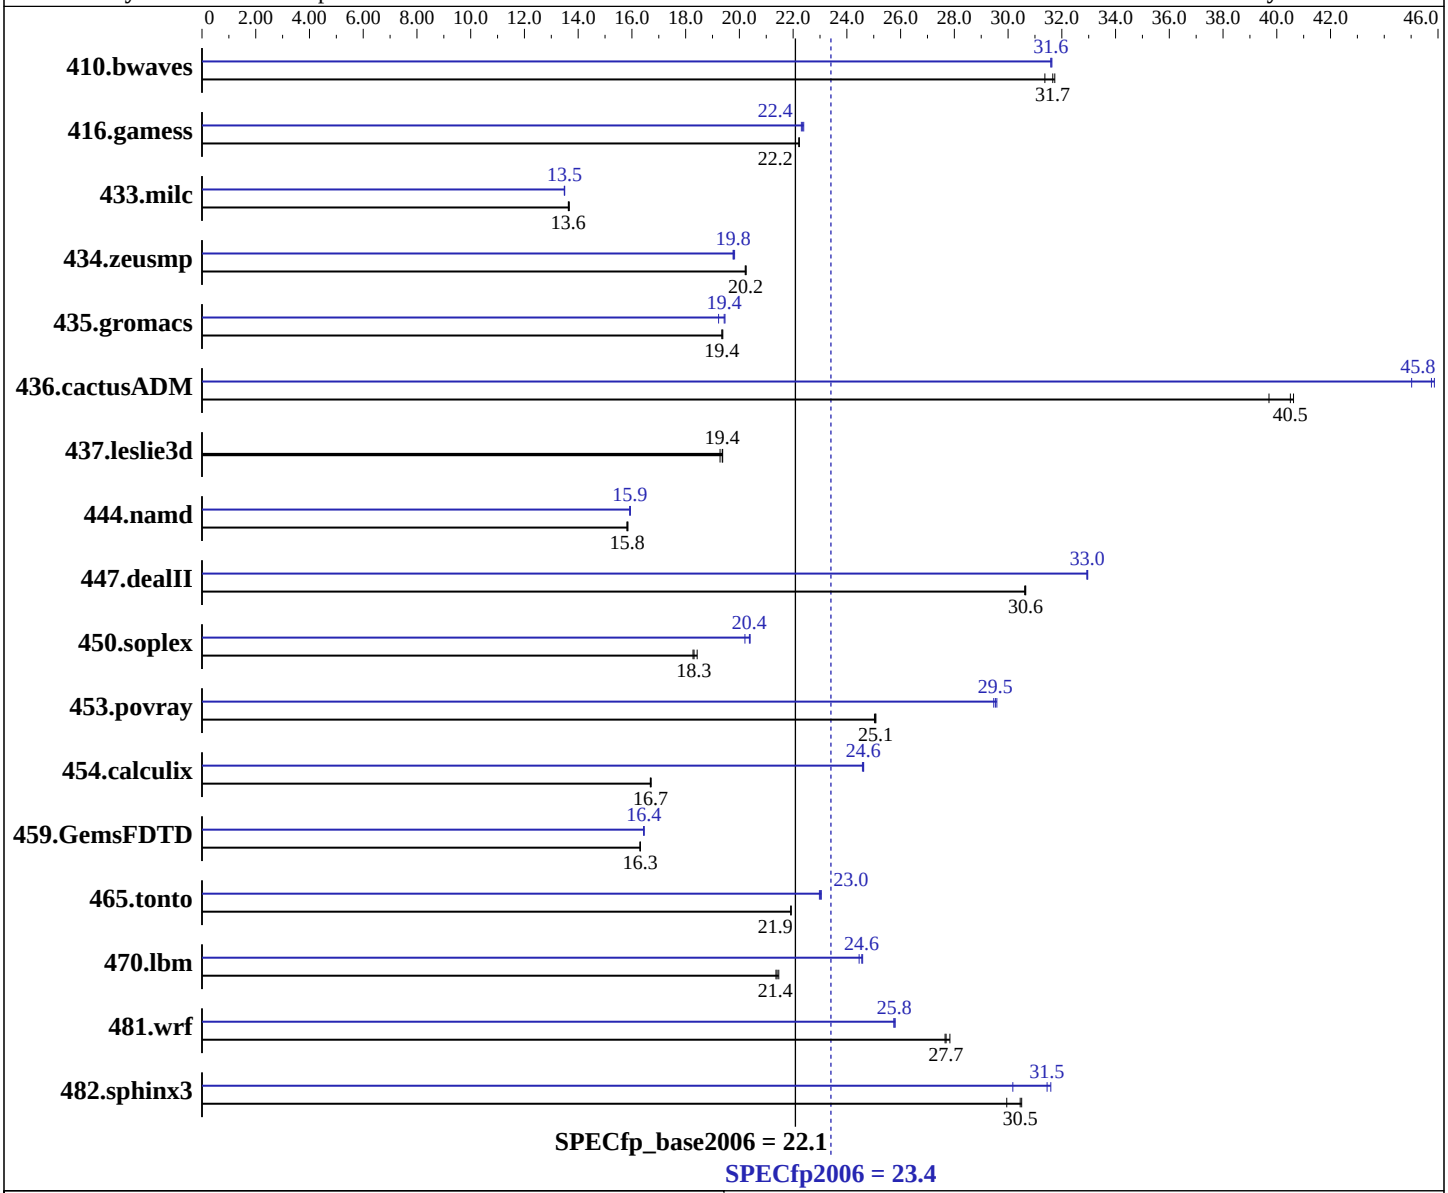

Hardware

CPU Name:	Intel Xeon E3110
CPU Characteristics:	3.00 GHz, 6 MB L2, 1333 MHz bus
CPU MHz:	3000
FPU:	Integrated
CPU(s) enabled:	2 cores, 1 chip, 2 cores/chip
CPU(s) orderable:	1 chip
Primary Cache:	32 KB I + 32 KB D on chip per core
Secondary Cache:	6 MB I+D on chip per chip

Continued on next page

Software

Operating System:	SUSE Linux Enterprise Server 10 (x86_64) SP1, Kernel 2.6.16.46-0.12-smp
Compiler:	Intel C++ and Fortran Compiler for Linux version 10.1 Build 20070913 Package ID: l_cc_p_10.1.008, l_fc_p_10.1.008
Auto Parallel:	Yes
File System:	ReiserFS
System State:	Run level 3 (multi-user)

Continued on next page

SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

NEC Corporation

Express5800/110Ri-1
(Intel Xeon E3110)

SPECfp2006 = 23.4

SPECfp_base2006 = 22.1

CPU2006 license: 9006
Test sponsor: NEC Corporation
Tested by: NEC Corporation

Test date: Jul-2008
Hardware Availability: Apr-2008
Software Availability: Nov-2007

L3 Cache: None
Other Cache: None
Memory: 8 GB (4x2 GB PC2-6400E, 2 rank, CL6-6-6, ECC)
Disk Subsystem: 1x80.0 GB SATAII, 7200RPM
Other Hardware: None

Base Pointers: 64-bit
Peak Pointers: 32/64-bit
Other Software: binutils 2.17

Results Table

Benchmark	Base						Peak					
	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	433	31.4	428	31.7	**429**	**31.7**	430	31.6	**430**	**31.6**	430	31.6
416.gamess	881	22.2	881	22.2	**881**	**22.2**	878	22.3	874	22.4	**876**	**22.4**
433.milc	671	13.7	**673**	**13.6**	673	13.6	681	13.5	680	13.5	**680**	**13.5**
434.zeusmp	**450**	**20.2**	449	20.3	450	20.2	460	19.8	**460**	**19.8**	459	19.8
435.gromacs	369	19.4	**369**	**19.4**	368	19.4	**367**	**19.4**	367	19.5	371	19.2
436.cactusADM	294	40.6	301	39.7	**295**	**40.5**	265	45.0	261	45.9	**261**	**45.8**
437.leslie3d	485	19.4	**485**	**19.4**	488	19.3	485	19.4	**485**	**19.4**	488	19.3
444.namd	506	15.9	507	15.8	**507**	**15.8**	**504**	**15.9**	503	15.9	504	15.9
447.dealII	374	30.6	373	30.7	**373**	**30.6**	347	32.9	347	33.0	**347**	**33.0**
450.soplex	456	18.3	453	18.4	**455**	**18.3**	**409**	**20.4**	413	20.2	409	20.4
453.povray	**212**	**25.1**	212	25.1	213	25.0	180	29.6	181	29.5	**180**	**29.5**
454.calculix	**494**	**16.7**	494	16.7	493	16.7	336	24.6	335	24.6	**335**	**24.6**
459.GemsFDTD	650	16.3	**651**	**16.3**	651	16.3	646	16.4	**645**	**16.4**	645	16.5
465.tonto	449	21.9	449	21.9	**449**	**21.9**	**427**	**23.0**	428	23.0	427	23.0
470.lbm	640	21.5	**642**	**21.4**	643	21.4	559	24.6	**560**	**24.6**	562	24.5
481.wrf	404	27.7	**403**	**27.7**	401	27.8	434	25.7	433	25.8	**434**	**25.8**
482.sphinx3	**640**	**30.5**	639	30.5	651	30.0	**620**	**31.5**	617	31.6	646	30.2

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Operating System Notes

```
'ulimit -s unlimited' was used to set the stacksize to unlimited prior to run
 OMP_NUM_THREADS set to number of cores
```

Platform Notes

```
Bios settings:
Hardware Prefetcher:          Enabled
Adjacent Cache Line Prefetch: Enabled
Intel SpeedStep Technology:   Enabled
```

General Notes

```
All benchmarks compiled in 64-bit mode except 450.soplex,
470.lbm and 482.sphinx3, for peak, are compiled in 32-bit mode
```

Base Compiler Invocation

C benchmarks:
icc

C++ benchmarks:
icpc

Fortran benchmarks:
ifort

Benchmarks using both Fortran and C:
icc ifort

Base Portability Flags

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
450.soplex: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64

Base Optimization Flags

C benchmarks:
-fast -parallel

C++ benchmarks:
-fast -parallel

Continued on next page

Base Optimization Flags (Continued)

Fortran benchmarks:
`-fast -parallel`

Benchmarks using both Fortran and C:
`-fast -parallel`

Peak Compiler Invocation

C benchmarks (except as noted below):
`/opt/intel/cc/10.1.008/bin/icc -L/opt/intel/cc/10.1.008/lib -I/opt/intel/cc/10.1.008/include`

433.milc: `icc`

C++ benchmarks (except as noted below):
`icpc`

450.soplex: `/opt/intel/cc/10.1.008/bin/icpc -L/opt/intel/cc/10.1.008/lib -I/opt/intel/cc/10.1.008/include`

Fortran benchmarks:
`ifort`

Benchmarks using both Fortran and C:
`icc ifort`

Peak Portability Flags

410.bwaves: `-DSPEC_CPU_LP64`
416.gamess: `-DSPEC_CPU_LP64`
433.milc: `-DSPEC_CPU_LP64`
434.zeusmp: `-DSPEC_CPU_LP64`
435.gromacs: `-DSPEC_CPU_LP64 -nofor_main`
436.cactusADM: `-DSPEC_CPU_LP64 -nofor_main`
437.leslie3d: `-DSPEC_CPU_LP64`
444.namd: `-DSPEC_CPU_LP64`
447.dealII: `-DSPEC_CPU_LP64`
453.povray: `-DSPEC_CPU_LP64`
454.calculix: `-DSPEC_CPU_LP64 -nofor_main`
459.GemsFDTD: `-DSPEC_CPU_LP64`
465.tonto: `-DSPEC_CPU_LP64`
481.wrf: `-DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX`

Peak Optimization Flags

C benchmarks:

433.milc: -prof-gen(pass 1) -prof-use(pass 2) -fast -fno-alias -auto-ilp32

470.lbm: -prof-gen(pass 1) -prof-use(pass 2) -fast -unroll2 -scalar-rep- -prefetch -opt-malloc-options=3

482.sphinx3: -fast -unroll2

C++ benchmarks:

444.namd: -prof-gen(pass 1) -prof-use(pass 2) -fast -fno-alias -auto-ilp32

447.dealII: -prof-gen(pass 1) -prof-use(pass 2) -fast -unroll2 -ansi-alias -scalar-rep-

450.soplex: -prof-gen(pass 1) -prof-use(pass 2) -fast -opt-malloc-options=3

453.povray: -prof-gen(pass 1) -prof-use(pass 2) -fast -unroll4 -ansi-alias

Fortran benchmarks:

410.bwaves: -fast -prefetch -parallel

416.gamess: -prof-gen(pass 1) -prof-use(pass 2) -fast -unroll2 -Ob0 -ansi-alias -scalar-rep-

434.zeusmp: -prof-gen(pass 1) -prof-use(pass 2) -fast

437.leslie3d: basepeak = yes

459.GemsFDTD: -prof-gen(pass 1) -prof-use(pass 2) -fast -unroll2 -Ob0 -prefetch -parallel

465.tonto: -prof-gen(pass 1) -prof-use(pass 2) -fast -unroll4 -auto

Benchmarks using both Fortran and C:

435.gromacs: -prof-gen(pass 1) -prof-use(pass 2) -fast -prefetch -auto-ilp32

436.cactusADM: -prof-gen(pass 1) -prof-use(pass 2) -fast -unroll2 -prefetch -parallel -auto-ilp32

454.calculix: -fast -unroll-aggressive -auto-ilp32

Continued on next page

Peak Optimization Flags (Continued)

481.wrf: `-fast -parallel -prefetch -auto-ilp32`

The flags file that was used to format this result can be browsed at
`http://www.spec.org/cpu2006/flags/NEC-Intel-ic10.1-FP-intel64-linux-flags.html`

You can also download the XML flags source by saving the following link:
`http://www.spec.org/cpu2006/flags/NEC-Intel-ic10.1-FP-intel64-linux-flags.xml`

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.0.
Report generated on Tue Jul 22 19:19:38 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 19 August 2008.