SPEC® CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

IBM System x iDataPlex dx360 (Intel Xeon E5472)

SPECfp®_rate2006 = 87.3

SPECfp_rate_base2006 = 77.4

CPU2006 license: 11
Test sponsor: IBM Corporation
Tested by: IBM Corporation

Test date: Jul-2008
Hardware Availability: Sep-2008
Software Availability: Nov-2007

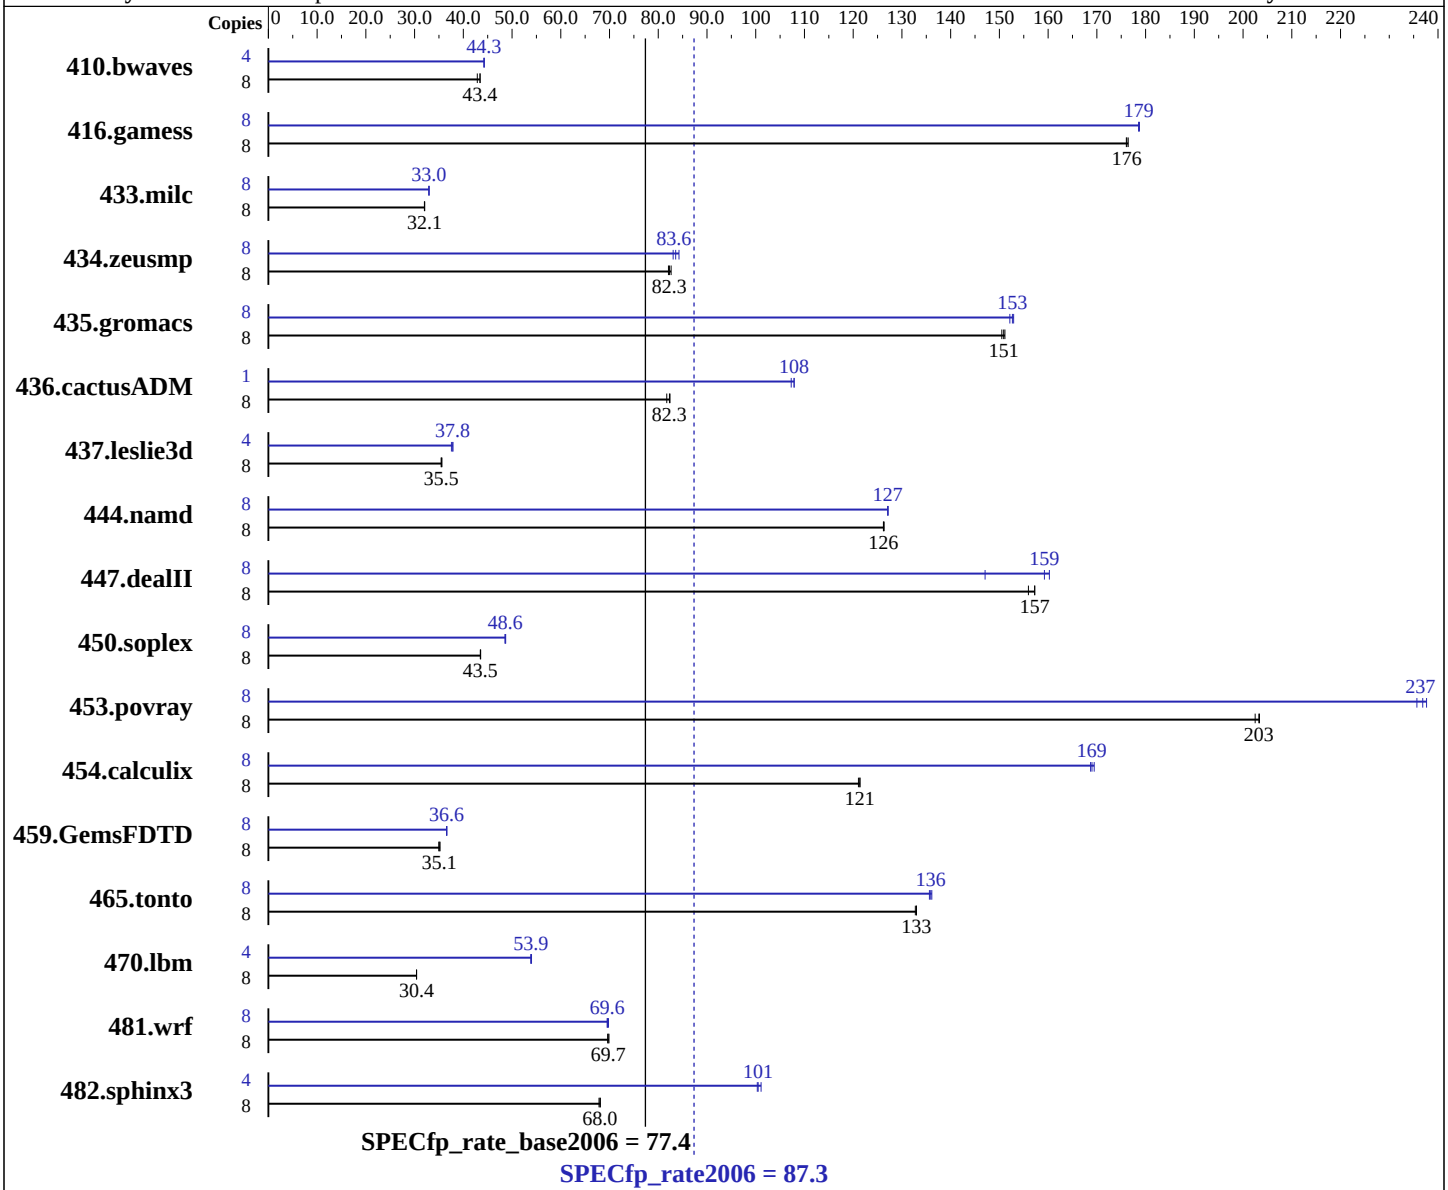

Hardware

CPU Name:	Intel Xeon E5472
CPU Characteristics:	1600MHz system bus
CPU MHz:	3000
FPU:	Integrated
CPU(s) enabled:	8 cores, 2 chips, 4 cores/chip
CPU(s) orderable:	1,2 chips
Primary Cache:	32 KB I + 32 KB D on chip per core
Secondary Cache:	12 MB I+D on chip per chip, 6 MB shared / 2 cores

Continued on next page

Software

Operating System:	SuSE Linux Enterprise Server 10 (x86_64) SP1, Kernel 2.6.16.46-0.12-smp
Compiler:	Intel C++ and Fortran Compiler 10.1 for Linux Build 20070913 Package ID: l_cc_p_10.1.008, l_fc_p_10.1.008
Auto Parallel:	Yes
File System:	ReiserFS
System State:	Multi-user, run level 3
Base Pointers:	64-bit

Continued on next page

SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

IBM System x iDataPlex dx360 (Intel Xeon E5472)

SPECfp_rate2006 = 87.3

SPECfp_rate_base2006 = 77.4

CPU2006 license: 11
Test sponsor: IBM Corporation
Tested by: IBM Corporation

Test date: Jul-2008
Hardware Availability: Sep-2008
Software Availability: Nov-2007

L3 Cache: None
Other Cache: None
Memory: 16 GB (8 x 2 GB DDR2-5300F ECC)
Disk Subsystem: 1 x 160 GB SATA, 7200 RPM
Other Hardware: None

Peak Pointers: 32/64-bit
Other Software: Binutils 2.17.50.0.15

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	8	2536	42.9	2503	43.4	**2503**	**43.4**	4	1228	44.3	**1228**	**44.3**	1229	44.2
416.gamess	8	**889**	**176**	890	176	888	176	8	**877**	**179**	876	179	877	179
433.milc	8	2294	32.0	**2291**	**32.1**	2290	32.1	8	2230	32.9	2228	33.0	**2228**	**33.0**
434.zeusmp	8	881	82.6	887	82.1	**885**	**82.3**	8	**871**	**83.6**	877	83.1	864	84.3
435.gromacs	8	**379**	**151**	378	151	380	150	8	375	152	**374**	**153**	374	153
436.cactusADM	8	1169	81.7	**1162**	**82.3**	1160	82.4	1	111	108	111	107	**111**	**108**
437.leslie3d	8	2120	35.5	2111	35.6	**2119**	**35.5**	4	1001	37.6	**994**	**37.8**	993	37.9
444.namd	8	508	126	508	126	**508**	**126**	8	505	127	**505**	**127**	505	127
447.dealII	8	582	157	587	156	**582**	**157**	8	**575**	**159**	571	160	622	147
450.soplex	8	1532	43.6	**1533**	**43.5**	1534	43.5	8	1370	48.7	1374	48.6	**1373**	**48.6**
453.povray	8	210	202	**209**	**203**	209	203	8	**180**	**237**	181	236	179	238
454.calculix	8	545	121	**544**	**121**	544	121	8	**391**	**169**	391	169	389	169
459.GemsFDTD	8	2409	35.2	2428	35.0	**2420**	**35.1**	8	2319	36.6	2321	36.6	**2319**	**36.6**
465.tonto	8	593	133	**592**	**133**	592	133	8	**579**	**136**	578	136	580	136
470.lbm	8	3617	30.4	**3615**	**30.4**	3614	30.4	4	**1020**	**53.9**	1020	53.9	1018	54.0
481.wrf	8	1284	69.6	**1281**	**69.7**	1279	69.9	8	1280	69.8	**1284**	**69.6**	1286	69.5
482.sphinx3	8	**2292**	**68.0**	2298	67.8	2289	68.1	4	**776**	**101**	777	100	771	101

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

General Notes

```
All benchmarks compiled in 64-bit mode except 437.leslie3d, 450.soplex,
470.lbm and 482.sphinx3, at peak, are compiled in 32-bit mode
Hardware Sector Prefetch Enabled and Adjacent Sector Prefetch Disabled
OMP_NUM_THREADS set to number of cores
KMP_AFFINITY set to physical,0
KMP_STACKSIZE set to 64M
taskset utility used to bind CPU(s) to processes
```

Base Compiler Invocation

C benchmarks:
icc

Continued on next page

Base Compiler Invocation (Continued)

C++ benchmarks:
icpc

Fortran benchmarks:
ifort

Benchmarks using both Fortran and C:
icc ifort

Base Portability Flags

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
450.soplex: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64

Base Optimization Flags

C benchmarks:
-fast

C++ benchmarks:
-fast

Fortran benchmarks:
-fast

Benchmarks using both Fortran and C:
-fast

Peak Compiler Invocation

C benchmarks (except as noted below):
`/opt/intel/cc/10.1.008/bin/icc -L/opt/intel/cc/10.1.008/lib -I/opt/intel/cc/10.1.008/include`

433.milc: `icc`

C++ benchmarks (except as noted below):
`icpc`

450.soplex: `/opt/intel/cc/10.1.008/bin/icpc -L/opt/intel/cc/10.1.008/lib -I/opt/intel/cc/10.1.008/include`

Fortran benchmarks (except as noted below):
`ifort`

437.leslie3d: `/opt/intel/fc/10.1.008/bin/ifort -L/opt/intel/fc/10.1.008/lib -I/opt/intel/fc/10.1.008/include`

Benchmarks using both Fortran and C:
`icc ifort`

Peak Portability Flags

410.bwaves: `-DSPEC_CPU_LP64`
416.gamess: `-DSPEC_CPU_LP64`
433.milc: `-DSPEC_CPU_LP64`
434.zeusmp: `-DSPEC_CPU_LP64`
435.gromacs: `-DSPEC_CPU_LP64 -nofor_main`
436.cactusADM: `-DSPEC_CPU_LP64 -nofor_main`
444.namd: `-DSPEC_CPU_LP64`
447.dealII: `-DSPEC_CPU_LP64`
453.povray: `-DSPEC_CPU_LP64`
454.calculix: `-DSPEC_CPU_LP64 -nofor_main`
459.GemsFDTD: `-DSPEC_CPU_LP64`
465.tonto: `-DSPEC_CPU_LP64`
481.wrf: `-DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX`

Peak Optimization Flags

C benchmarks:

433.milc: `-prof-gen`(pass 1) `-prof-use`(pass 2) `-fast -fno-alias -auto-ilp32`

470.lbm: `-prof-gen`(pass 1) `-prof-use`(pass 2) `-fast -unroll2 -scalar-rep- -prefetch -opt-malloc-options=3`

Continued on next page

Peak Optimization Flags (Continued)

482.sphinx3: -fast -unroll2

C++ benchmarks:

444.namd: -prof-gen(pass 1) -prof-use(pass 2) -fast -fno-alias -auto-ilp32

447.dealII: -prof-gen(pass 1) -prof-use(pass 2) -fast -unroll2 -ansi-alias -scalar-rep-

450.soplex: -prof-gen(pass 1) -prof-use(pass 2) -fast -opt-malloc-options=3

453.povray: -prof-gen(pass 1) -prof-use(pass 2) -fast -unroll4 -ansi-alias

Fortran benchmarks:

410.bwaves: -fast -prefetch

416.gamess: -prof-gen(pass 1) -prof-use(pass 2) -fast -unroll2 -Ob0 -ansi-alias -scalar-rep-

434.zeusmp: -prof-gen(pass 1) -prof-use(pass 2) -fast

437.leslie3d: -prof-gen(pass 1) -prof-use(pass 2) -fast -prefetch -opt-malloc-options=3

459.GemsFDTD: -prof-gen(pass 1) -prof-use(pass 2) -fast -unroll2 -Ob0 -prefetch

465.tonto: -prof-gen(pass 1) -prof-use(pass 2) -fast -unroll4 -auto

Benchmarks using both Fortran and C:

435.gromacs: -prof-gen(pass 1) -prof-use(pass 2) -fast -prefetch -auto-ilp32

436.cactusADM: -prof-gen(pass 1) -prof-use(pass 2) -fast -unroll2 -prefetch -parallel -auto-ilp32

454.calculix: -fast -unroll-aggressive -auto-ilp32

481.wrf: -fast -auto-ilp32

The flags file that was used to format this result can be browsed at
http://www.spec.org/cpu2006/flags/Intel-ic10.1-fp-linux64-revC.20090713.html

You can also download the XML flags source by saving the following link:
`http://www.spec.org/cpu2006/flags/Intel-ic10.1-fp-linux64-revC.20090713.xml`

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.0.
Report generated on Tue Jul 22 19:26:51 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 19 August 2008.